

Luminaire

Code AA20004_DMX_G

Name LOT RIFR.RCS.TRIM.LED R+W NRO+NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 255 - CH5 0 - CH6 0


Measurement

Code FTS1700612

Name LOT RIFR.RCS.TRIM.LED R+W NRO+NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 255 - CH5 0 - CH6 0

Luminaire Flux	388.67 lm	Luminaire Power	55.00 W	Efficacy	7.07 lm/W	Efficiency	100.00%
Lamps Flux	388.67 lm	Maximum value	331.67 cd/klm	Position	C=0.00 G=9.00	CG	Rotosymmetrical
Round Luminaire		Diam.	185 mm	Height	80 mm		
Round Luminous Area		Diam.	185 mm	Height	0 mm		
Horizontal Luminous Area		0.026880 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006503 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-03-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		388.67 lm	
Continuous Power=55W Peak Power=85W GREEN L70(6K)=50000 h							
C.I.E.	49 83 97 100 100			D DIN 5040		A30	
F UTE	1.00 E			B NBN		BZ 4	

Diam=185mm




Semipiani C

180.0 — 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

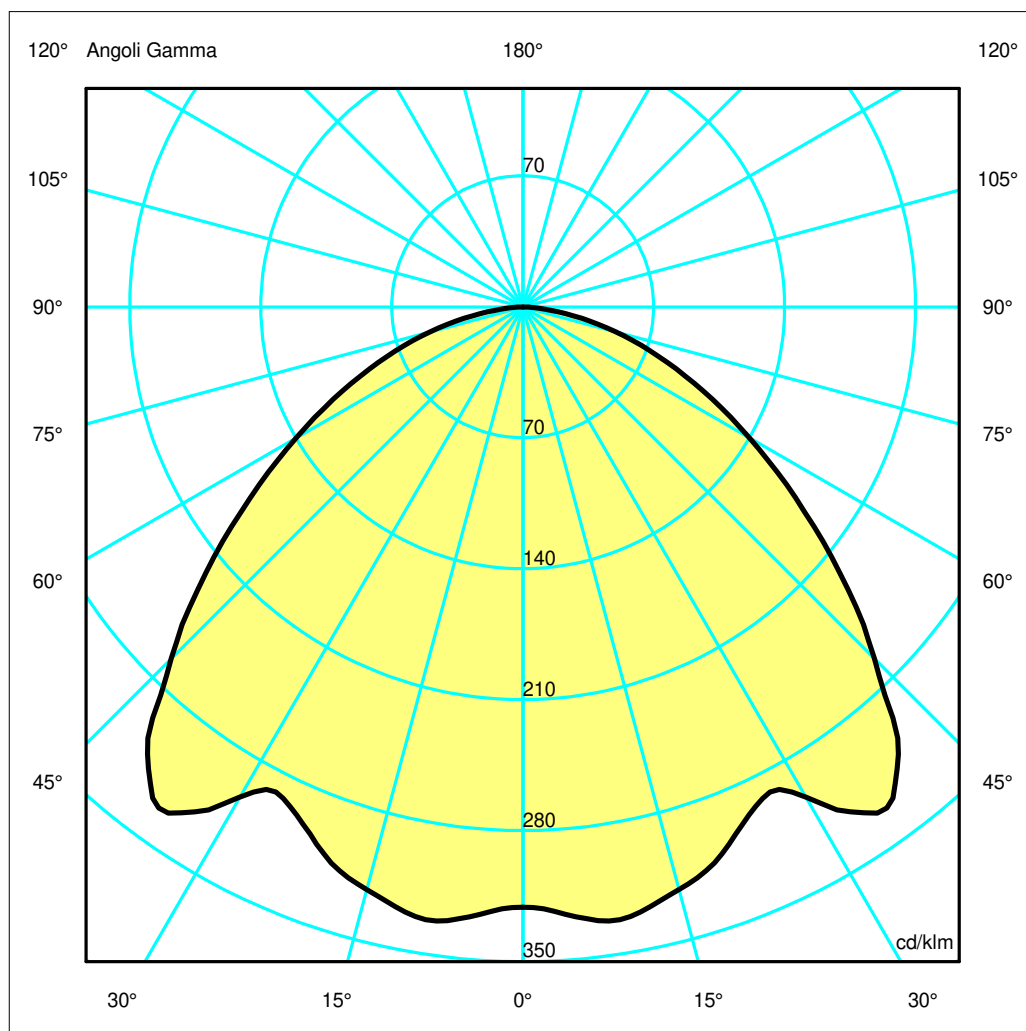

Luminaire

Code AA20004_DMX_G

Name LOT RIFR.RCS.TRIM.LED R+W NRO+NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 255 - CH5 0 - CH6 0

Measur.

Code FTS1700612


Name LOT RIFR.RCS.TRIM.LED R+W NRO+NRO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 255 - CH5 0 - CH6 0

Luminaire Flux	388.67 lm	Luminaire Power	55.00 W	Efficacy	7.07 lm/W	Efficiency	100.00%
Lamps Flux	388.67 lm	Maximum value	331.67 cd/klm	Position	C=0.00 G=9.00	CG	Rotosymmetrical
Round Luminaire		Diam.	185 mm	Height	80 mm		
Round Luminous Area		Diam.	185 mm	Height	0 mm		
Horizontal Luminous Area		0.026880 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006503 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-03-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		388.67 lm	
Continuous Power=55W Peak Power=85W GREEN L70(6K)=50000 h							
C.I.E.	49 83 97 100 100			D DIN 5040		A30	
F UTE	1.00 E			B NBN		BZ 4	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.51	3.02	4.54	6.05	7.56	OC	1.51	3.02	4.54	6.05	7.56
OB	1.51	3.02	4.54	6.05	7.56	OD	1.51	3.02	4.54	6.05	7.56

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	124.69	127.18	125.31	114.48	128.40	103.32	69.16	41.40	19.90	3.51
OB	124.69	127.18	125.31	114.48	128.40	103.32	69.16	41.40	19.90	3.51
OC	124.69	127.18	125.31	114.48	128.40	103.32	69.16	41.40	19.90	3.51
OD	124.69	127.18	125.31	114.48	128.40	103.32	69.16	41.40	19.90	3.51

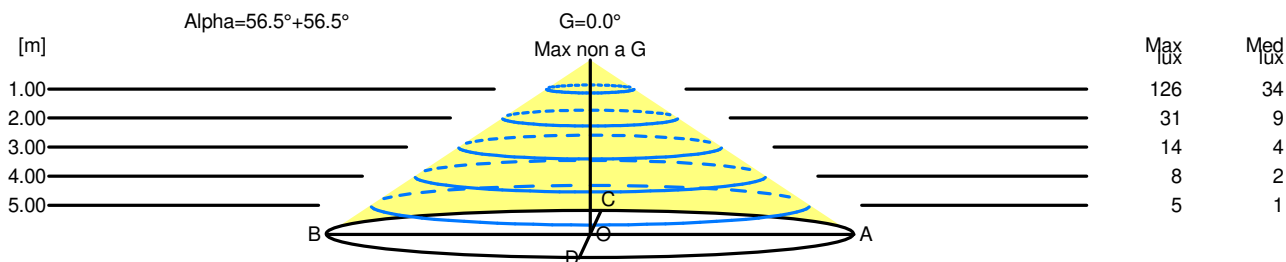

H[m]	D[m]	Max lux	Med lux	Alpha=56.5°+56.5°	G=0.0 Max non a G
1.00	3.02	126	34		
2.00	6.05	31	9		
3.00	9.07	14	4		
4.00	12.10	8	2		
5.00	15.12	5	1		