


Luminaire

Code AA40004_DMX0
 Name LOT RIFR.PROJ.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 255 - CH3 0 - CH4 0 - CH5 0 - CH6 0

Measurement

Code FTS1700243
 Name LOT RIFR.PROJ.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 255 - CH3 0 - CH4 0 - CH5 0 - CH6 0

Luminaire Flux	1166.78 lm	Luminaire Power	60.00 W	Efficacy	19.45 lm/W	Efficiency	100.00%
Lamps Flux	1166.78 lm	Maximum value	12608.63 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 185 mm Diam. 75 mm	Height	80 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.001069 m2				
Coordinate system	CG	Symmetry Type	180				
Date	16-03-2017	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	1166.78 lm				
Continuous Power=60W Peak Power=85W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000 h							
C.I.E.	92 97 100 100 100	D DIN 5040	A60				
F UTE	1.00 A	B NBN	BZ 1				

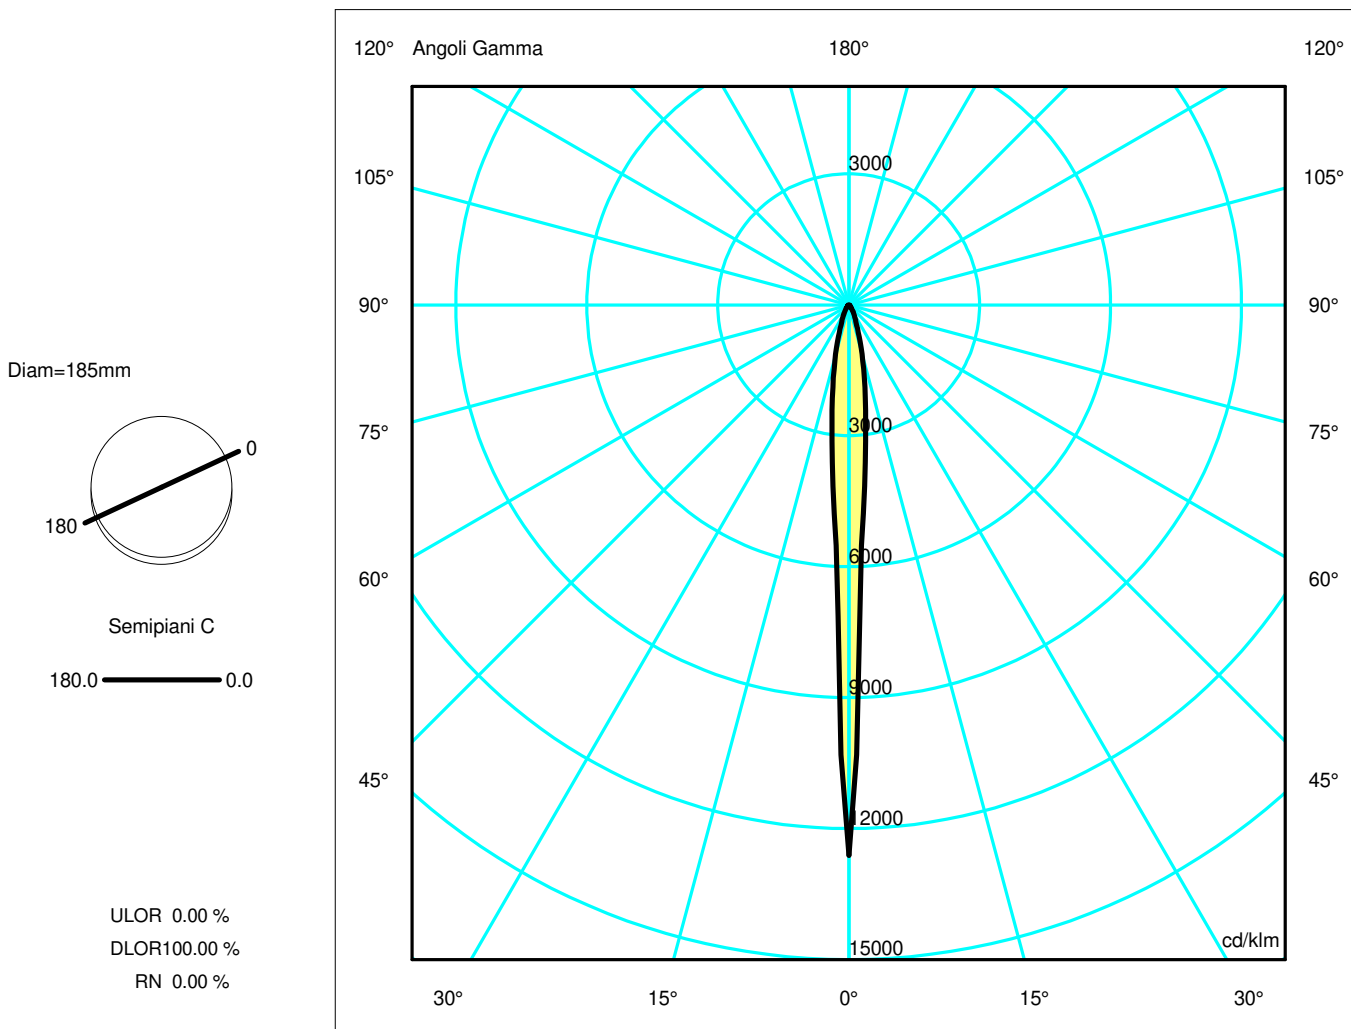

Luminaire

Code AA40004_DMx0
 Name LOT RIFR.PROJ.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 255 - CH3 0 - CH4 0 - CH5 0 - CH6 0

Measurement


Code FTS1700243
 Name LOT RIFR.PROJ.TRACK.LED R+W NRO - DMX - CH1 0 - CH2 255 - CH3 0 - CH4 0 - CH5 0 - CH6 0

Luminaire Flux	1166.78 lm	Luminaire Power	60.00 W	Efficacy	19.45 lm/W	Efficiency	100.00%
Lamps Flux	1166.78 lm	Maximum value	12608.63 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	185 mm	Height	80 mm		
Round Luminous Area		Diam.	75 mm	Height	0 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.001069 m2	
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle		180	Rotosymmetrical
Date	16-03-2017	Measurement Flux				1166.78 lm	
Measurement Distance	0.00						
Continuous Power=60W Peak Power=85W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000 h							
C.I.E.	92 97 100 100 100	D DIN 5040		A60			
F UTE	1.00 A	B NBN		BZ 1			

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.04	0.09	0.13	0.18	0.22	OC	0.04	0.09	0.13	0.18	0.22
OB	0.04	0.09	0.13	0.18	0.22	OD	0.04	0.09	0.13	0.18	0.22

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	14711.50	4861.10	1362.01	417.02	142.16	51.18	24.77	26.59	8.15	1.41
OB	14711.50	4861.10	1362.01	417.02	142.16	51.18	24.77	26.59	8.15	1.41
OC	14711.50	4861.10	1362.01	417.02	142.16	51.18	24.77	26.59	8.15	1.41
OD	14711.50	4861.10	1362.01	417.02	142.16	51.18	24.77	26.59	8.15	1.41

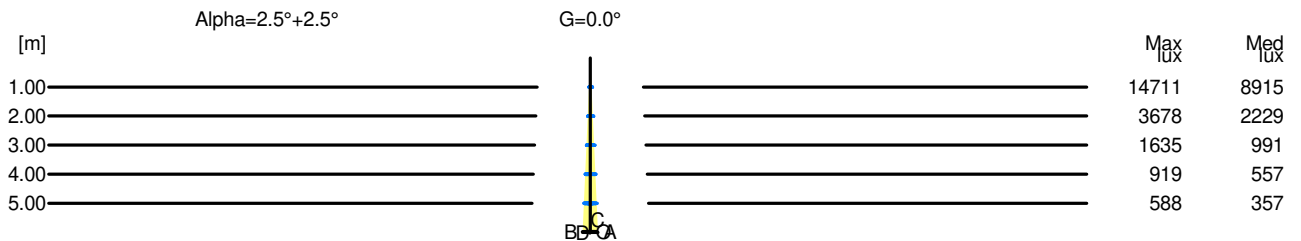

H[m]	D[m]	Max lux	Med lux	Alpha=2.5°+2.5°	G=0.0
1.00	0.09	14711	8915		
2.00	0.18	3678	2229		
3.00	0.26	1635	991		
4.00	0.35	919	557		
5.00	0.44	588	357		