

## Luminaire


Code AB08252  
Name Tagora 80 plafone New led Dim Beige/Bianco 3000K Wide flood

## Measurement

Code FTS1603824  
Name Tagora 80 plafone New led Dim Beige/Bianco 3000K Wide flood

|                                                                                                  |                   |                 |                |                             |               |                 |                 |
|--------------------------------------------------------------------------------------------------|-------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux                                                                                   | 1110.79 lm        | Luminaire Power | 14.00 W        | Efficacy                    | 79.34 lm/W    | Efficiency      | 100.00%         |
| Lamps Flux                                                                                       | 1110.79 lm        | Maximum value   | 1836.58 cd/klm | Position                    | C=0.00 G=2.00 | CG              | Rotosymmetrical |
| Round Luminaire                                                                                  |                   | Diam.           | 80 mm          | Height                      | 335 mm        |                 |                 |
| Round Luminous Area                                                                              |                   | Diam.           | 45 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area                                                                         |                   | 0.001590 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°                                                                        |                   | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90°                                                                       |                   | 0.000000 m2     |                | Glare area at 76°           |               | 0.000385 m2     |                 |
| Coordinate system                                                                                |                   | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date                                                                                             |                   | 16-12-2016      |                | Maximum Gamma Angle         |               | 180             |                 |
| Measurement Distance                                                                             |                   | 0.00            |                | Measurement Flux            |               | 1110.79 lm      |                 |
| LED Flux=1489lm LED Power=11,6W Eff=75% EfcLed=128lm/W EfcLum=79lm/W Ra=90 SDCM=3 L70(6K)=60000h |                   |                 |                |                             |               |                 |                 |
| C.I.E.                                                                                           | 98 99 100 100 100 |                 |                | D DIN 5040                  | A60           |                 |                 |
| F UTE                                                                                            | --                |                 |                | B NBN                       | BZ 1          |                 |                 |

Diam=80mm




Semipiani C

180.0 — 0.0

ULOR 0.40 %

DLOR 99.60 %

RN 0.40 %

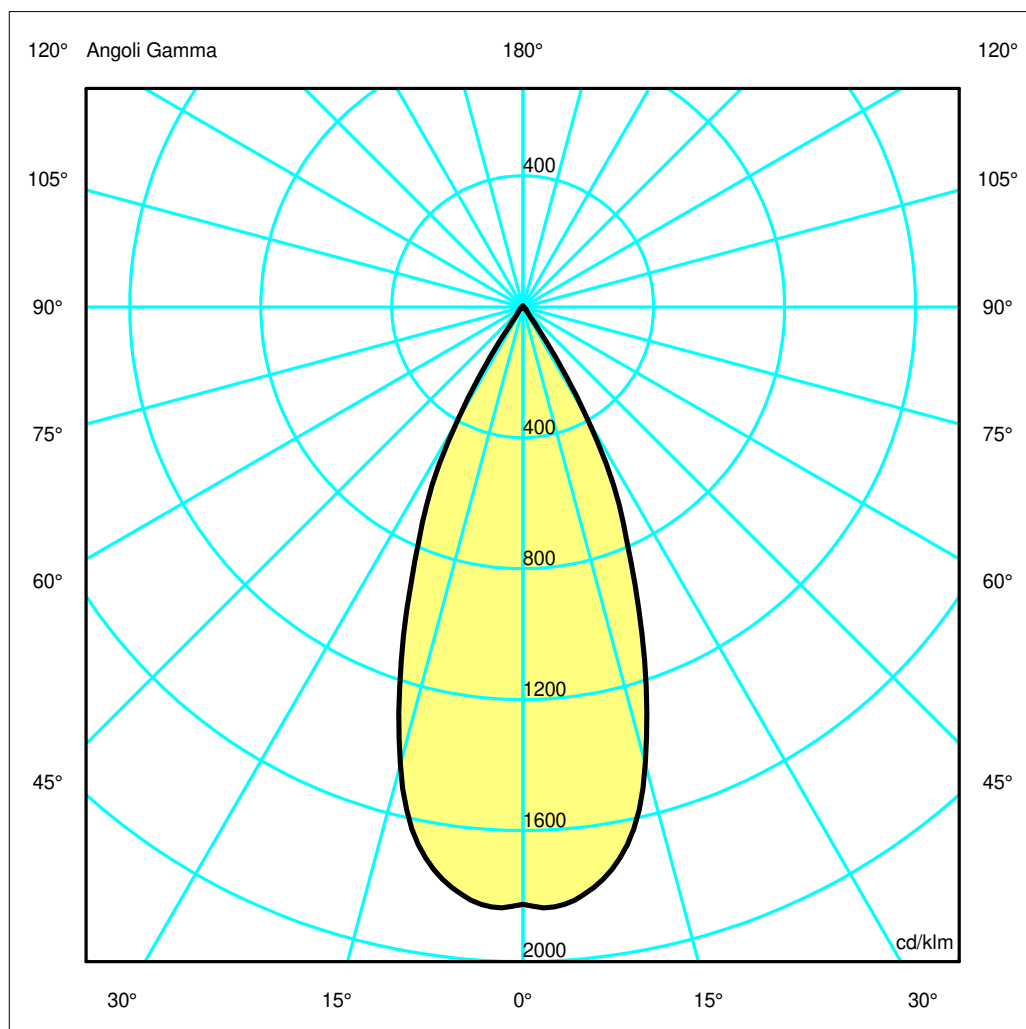

## Luminaire

Code AB08252  
Name Tagora 80 plafone New led Dim Beige/Bianco 3000K Wide flood

## Measurement


Code FTS1603824  
Name Tagora 80 plafone New led Dim Beige/Bianco 3000K Wide flood

|                                                                                                  |                   |                 |                |                             |               |                 |                 |
|--------------------------------------------------------------------------------------------------|-------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux                                                                                   | 1110.79 lm        | Luminaire Power | 14.00 W        | Efficacy                    | 79.34 lm/W    | Efficiency      | 100.00%         |
| Lamps Flux                                                                                       | 1110.79 lm        | Maximum value   | 1836.58 cd/klm | Position                    | C=0.00 G=2.00 | CG              | Rotosymmetrical |
| Round Luminaire                                                                                  |                   | Diam.           | 80 mm          | Height                      | 335 mm        |                 |                 |
| Round Luminous Area                                                                              |                   | Diam.           | 45 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area                                                                         |                   | 0.001590 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°                                                                        |                   | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90°                                                                       |                   | 0.000000 m2     |                | Glare area at 76°           |               | 0.000385 m2     |                 |
| Coordinate system                                                                                |                   | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date                                                                                             |                   | 16-12-2016      |                | Maximum Gamma Angle         |               | 180             |                 |
| Measurement Distance                                                                             |                   | 0.00            |                | Measurement Flux            |               | 1110.79 lm      |                 |
| LED Flux=1489lm LED Power=11,6W Eff=75% EfcLed=128lm/W EfcLum=79lm/W Ra=90 SDCM=3 L70(6K)=60000h |                   |                 |                |                             |               |                 |                 |
| C.I.E.                                                                                           | 98 99 100 100 100 |                 |                | D DIN 5040                  | A60           |                 |                 |
| F UTE                                                                                            | --                |                 |                | B NBN                       | BZ 1          |                 |                 |

Width at 50.00 % of Max Intensity

|      |      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA   | 0.40 | 0.81 | 1.21 | 1.61 | 2.01 | OC   | 0.40 | 0.81 | 1.21 | 1.61 | 2.01 |
| OB   | 0.40 | 0.81 | 1.21 | 1.61 | 2.01 | OD   | 0.40 | 0.81 | 1.21 | 1.61 | 2.01 |

|    |                                |         |         |        |       |       |      |      |      |      |
|----|--------------------------------|---------|---------|--------|-------|-------|------|------|------|------|
|    | Luminous Intensities [ cd/klm] |         |         |        |       |       |      |      |      |      |
|    | 0                              | 5       | 15      | 25     | 35    | 45    | 55   | 65   | 75   | 85   |
| OA | 2027.37                        | 2020.49 | 1605.73 | 805.46 | 88.98 | 16.74 | 8.78 | 4.40 | 2.30 | 0.81 |
| OB | 2027.37                        | 2020.49 | 1605.73 | 805.46 | 88.98 | 16.74 | 8.78 | 4.40 | 2.30 | 0.81 |
| OC | 2027.37                        | 2020.49 | 1605.73 | 805.46 | 88.98 | 16.74 | 8.78 | 4.40 | 2.30 | 0.81 |
| OD | 2027.37                        | 2020.49 | 1605.73 | 805.46 | 88.98 | 16.74 | 8.78 | 4.40 | 2.30 | 0.81 |

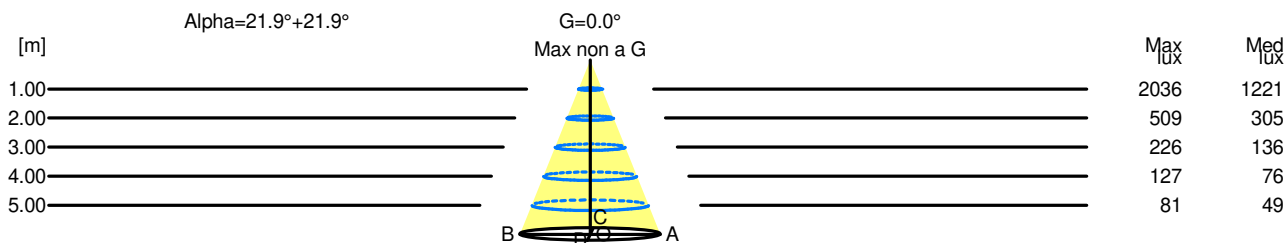

| H[m] | D[m] | Max lux | Med lux | Alpha=21.9°+21.9° | G=0.0<br>Max non a G |
|------|------|---------|---------|-------------------|----------------------|
| 1.00 | 0.81 | 2036    | 1221    |                   |                      |
| 2.00 | 1.61 | 509     | 305     |                   |                      |
| 3.00 | 2.42 | 226     | 136     |                   |                      |
| 4.00 | 3.22 | 127     | 76      |                   |                      |
| 5.00 | 4.03 | 81      | 49      |                   |                      |