

Luminaire

Code DD0014G10B2W
Name UNA PRO 12 LED SEMI/R 3000K/FL - BCO

Measurem.

Code FTS1600373-A
Name UNA PRO 12 LED SEMI/R 3000K/FL - BCO

Luminaire Flux	1095 lm	Luminaire Power	13.0 W	Efficacy	84.232 lm/W	Efficiency	100.00%
Source Flux	1095 lm	Maximum value	5584.35 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	150 mm	Width	150 mm	Height	20 mm
Rectangular Luminous Area		Length	106 mm	Width	80 mm	Height	0 mm
Horizontal Luminous Area		0.008480 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002051 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1095 lm	
LED Flux=1428lm LED Power=11W Eff=77% EfcLed=125lm/W EfcLum=84lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=272160h							
C.I.E.	94 97 99 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	

150mm x 150mm




Semipiani C

180.0 ——— 0.0

ULOR 0.07 %

DLOR 99.93 %

RN 0.07 %

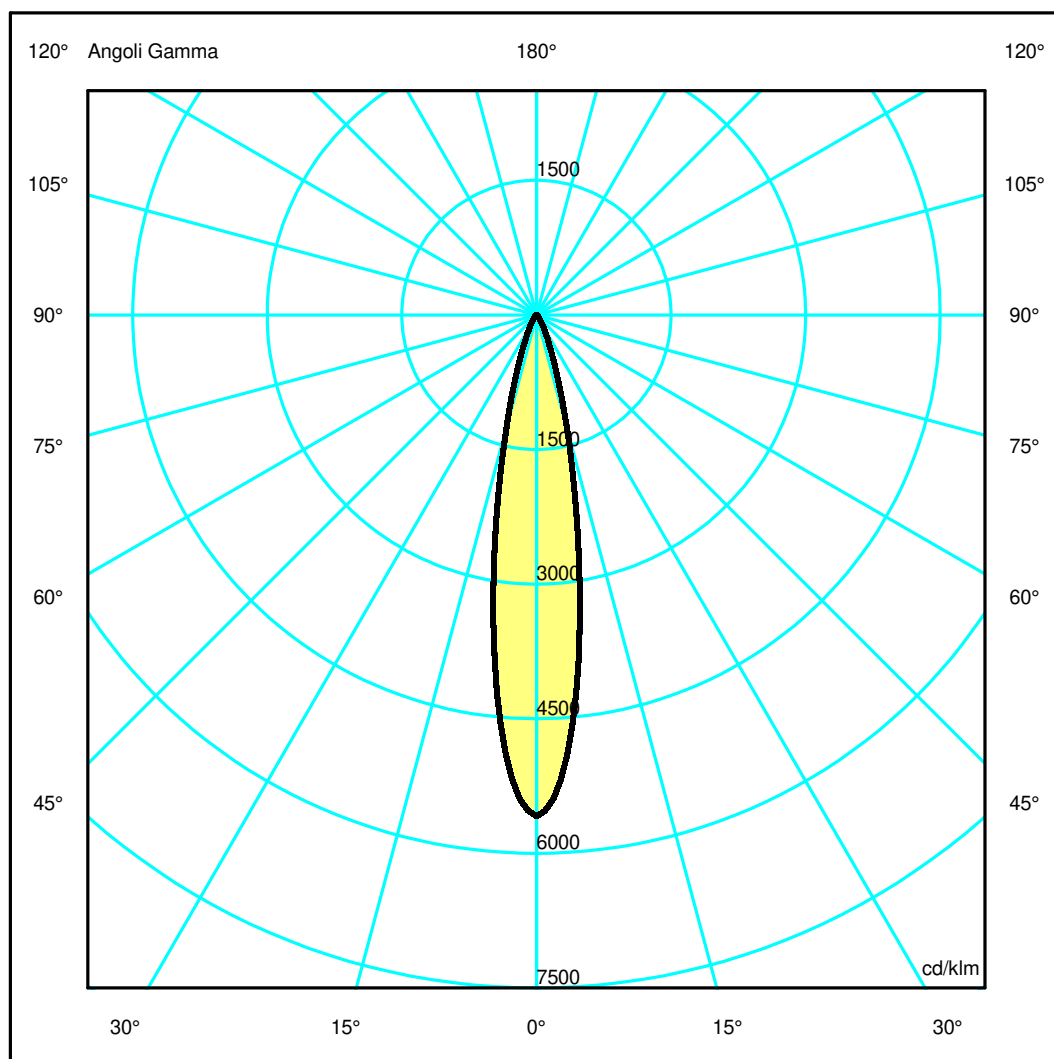

Luminaire

Code DD0014G10B2W
Name UNA PRO 12 LED SEMI/R 3000K/FL - BCO

Measurem.


Code FTS1600373-A
Name UNA PRO 12 LED SEMI/R 3000K/FL - BCO

Luminaire Flux	1095 lm	Luminaire Power	13.0 W	Efficacy	84.232 lm/W	Efficiency	100.00%
Source Flux	1095 lm	Maximum value	5584.35 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	150 mm	Width	150 mm	Height	20 mm
Rectangular Luminous Area		Length	106 mm	Width	80 mm	Height	0 mm
Horizontal Luminous Area		0.008480 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002051 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1095 lm	
LED Flux=1428lm LED Power=11W Eff=77% EfcLed=125lm/W EfcLum=84lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=272160h							
C.I.E.	94 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.17	0.35	0.52	0.69	0.86	OC	0.17	0.35	0.52	0.69	0.86
OB	0.17	0.35	0.52	0.69	0.86	OD	0.17	0.35	0.52	0.69	0.86

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6114.92	5020.27	1427.14	309.89	81.20	32.43	19.98	11.64	6.19	9.53
OB	6114.92	5020.27	1427.14	309.89	81.20	32.43	19.98	11.64	6.19	9.53
OC	6114.92	5020.27	1427.14	309.89	81.20	32.43	19.98	11.64	6.19	9.53
OD	6114.92	5020.27	1427.14	309.89	81.20	32.43	19.98	11.64	6.19	9.53

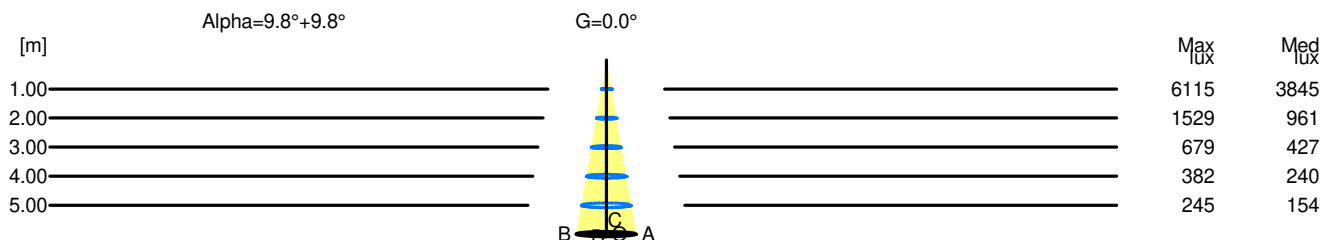

H[m]	D[m]	Max lux	Med lux	Alpha=9.8°+9.8°	G=0.0
1.00	0.35	6115	3845		
2.00	0.69	1529	961		
3.00	1.04	679	427		
4.00	1.38	382	240		
5.00	1.73	245	154		