

## Luminaire


Code DD0014L09D3SW  
Name UNA PRO 75 SMDx2 C 3000K/WFL - NRO/NRO

## Measur.

Code FTS1600735-A  
Name UNA PRO 75 SMDx2 C 3000K/WFL - NRO/NRO

|                                                                                                                 |                   |                 |                |                             |               |                    |         |
|-----------------------------------------------------------------------------------------------------------------|-------------------|-----------------|----------------|-----------------------------|---------------|--------------------|---------|
| Luminaire Flux                                                                                                  | 958 lm            | Luminaire Power | 14.0 W         | Efficacy                    | 68.431 lm/W   | Efficiency         | 100.00% |
| Source Flux                                                                                                     | 958 lm            | Maximum value   | 2156.88 cd/klm | Position                    | C=0.00 G=0.00 | CG Rotosymmetrical |         |
| Rectangular Luminaire                                                                                           |                   | Length          | 150 mm         | Width                       | 75 mm         | Height             | 120 mm  |
| Rectangular Luminous Area                                                                                       |                   | Length          | 106 mm         | Width                       | 53 mm         | Height             | 0 mm    |
| Horizontal Luminous Area                                                                                        |                   | 0.005618 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2        |         |
| Emitting area on Plane 0°                                                                                       |                   | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2        |         |
| Emitting area on Plane 90°                                                                                      |                   | 0.000000 m2     |                | Glare area at 76°           |               | 0.001359 m2        |         |
| Coordinate system                                                                                               |                   | CG              |                | Symmetry Type               |               | Rotosymmetrical    |         |
| Date                                                                                                            |                   | 19-09-2022      |                | Maximum Gamma Angle         |               | 180                |         |
| Measurement Distance                                                                                            |                   | 0.00            |                | Measurement Flux            |               | 958 lm             |         |
| LED Flux=1304lm LED Power=11W Eff=73% EfcLed=117lm/W EfcLum=68lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=272160h |                   |                 |                |                             |               |                    |         |
| C.I.E.                                                                                                          | 93 98 100 100 100 |                 |                | D DIN 5040                  | A60           |                    |         |
| F UTE                                                                                                           | 1.00 A            |                 |                | B NBN                       | BZ 1          |                    |         |


150mm x 75mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

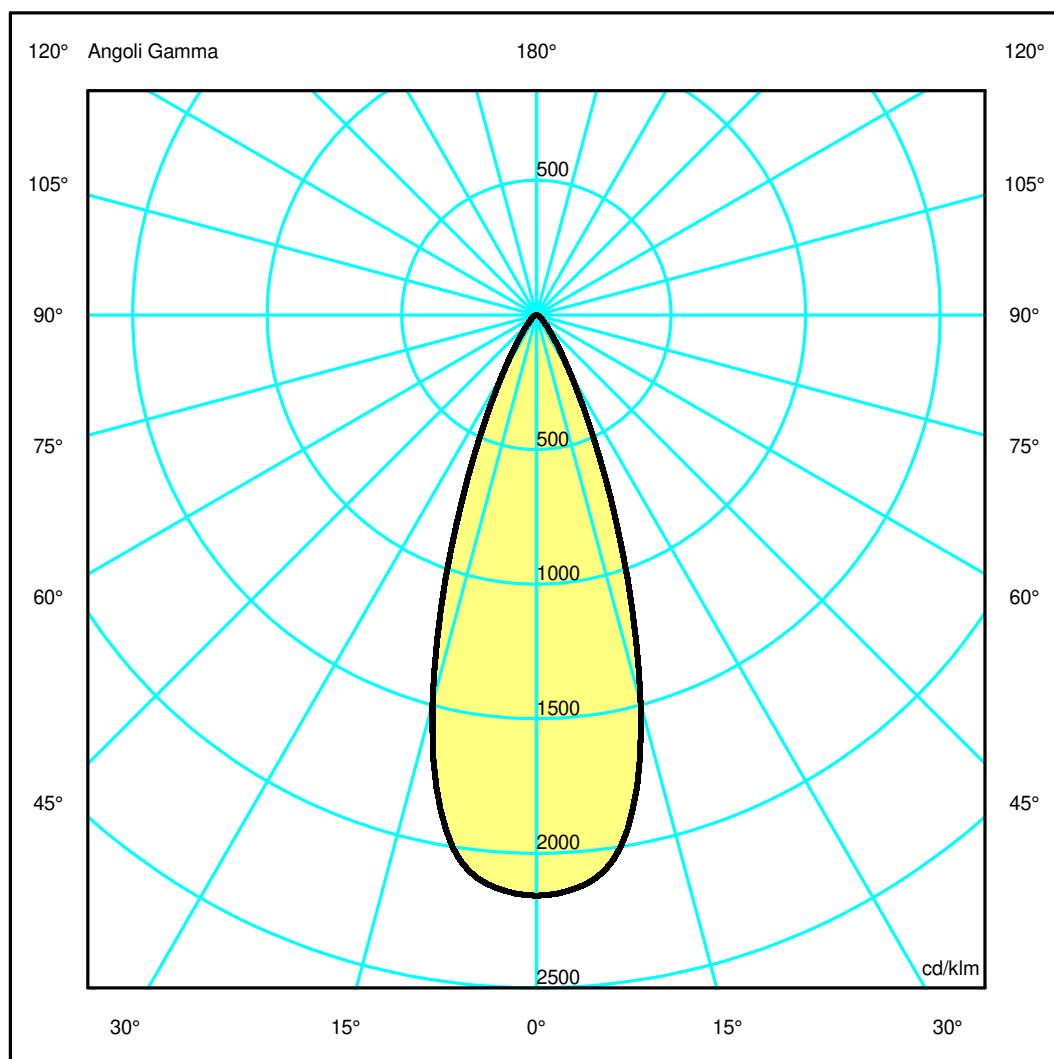

## Luminaire

Code DD0014L09D3SW  
Name UNA PRO 75 SMDx2 C 3000K/WFL - NRO/NRO

## Measurement


Code FTS1600735-A  
Name UNA PRO 75 SMDx2 C 3000K/WFL - NRO/NRO

|                                                                                                                 |                   |                 |                |                             |               |                    |         |
|-----------------------------------------------------------------------------------------------------------------|-------------------|-----------------|----------------|-----------------------------|---------------|--------------------|---------|
| Luminaire Flux                                                                                                  | 958 lm            | Luminaire Power | 14.0 W         | Efficacy                    | 68.431 lm/W   | Efficiency         | 100.00% |
| Source Flux                                                                                                     | 958 lm            | Maximum value   | 2156.88 cd/klm | Position                    | C=0.00 G=0.00 | CG Rotosymmetrical |         |
| Rectangular Luminaire                                                                                           |                   | Length          | 150 mm         | Width                       | 75 mm         | Height             | 120 mm  |
| Rectangular Luminous Area                                                                                       |                   | Length          | 106 mm         | Width                       | 53 mm         | Height             | 0 mm    |
| Horizontal Luminous Area                                                                                        |                   | 0.005618 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2        |         |
| Emitting area on Plane 0°                                                                                       |                   | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2        |         |
| Emitting area on Plane 90°                                                                                      |                   | 0.000000 m2     |                | Glare area at 76°           |               | 0.001359 m2        |         |
| Coordinate system                                                                                               |                   | CG              |                | Symmetry Type               |               | Rotosymmetrical    |         |
| Date                                                                                                            |                   | 19-09-2022      |                | Maximum Gamma Angle         |               | 180                |         |
| Measurement Distance                                                                                            |                   | 0.00            |                | Measurement Flux            |               | 958 lm             |         |
| LED Flux=1304lm LED Power=11W Eff=73% EfcLed=117lm/W EfcLum=68lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=272160h |                   |                 |                |                             |               |                    |         |
| C.I.E.                                                                                                          | 93 98 100 100 100 |                 |                | D DIN 5040                  | A60           |                    |         |
| F UTE                                                                                                           | 1.00 A            |                 |                | B NBN                       | BZ 1          |                    |         |

Width at 50.00 % of Max Intensity

|      |      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA   | 0.34 | 0.68 | 1.01 | 1.35 | 1.69 | OC   | 0.34 | 0.68 | 1.01 | 1.35 | 1.69 |
| OB   | 0.34 | 0.68 | 1.01 | 1.35 | 1.69 | OD   | 0.34 | 0.68 | 1.01 | 1.35 | 1.69 |

|    |                                |         |         |        |        |       |       |       |      |      |  |
|----|--------------------------------|---------|---------|--------|--------|-------|-------|-------|------|------|--|
|    | Luminous Intensities [ cd/klm] |         |         |        |        |       |       |       |      |      |  |
|    | 0                              | 5       | 15      | 25     | 35     | 45    | 55    | 65    | 75   | 85   |  |
| OA | 2066.36                        | 2031.56 | 1429.71 | 477.00 | 126.02 | 40.96 | 21.42 | 13.21 | 6.68 | 1.41 |  |
| OB | 2066.36                        | 2031.56 | 1429.71 | 477.00 | 126.02 | 40.96 | 21.42 | 13.21 | 6.68 | 1.41 |  |
| OC | 2066.36                        | 2031.56 | 1429.71 | 477.00 | 126.02 | 40.96 | 21.42 | 13.21 | 6.68 | 1.41 |  |
| OD | 2066.36                        | 2031.56 | 1429.71 | 477.00 | 126.02 | 40.96 | 21.42 | 13.21 | 6.68 | 1.41 |  |

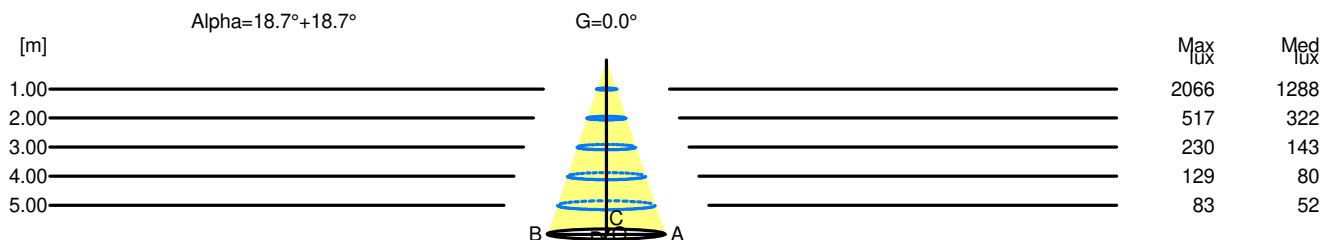

| H[m] | D[m] | Max lux | Med lux | Alpha=18.7°+18.7° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.68 | 2066    | 1288    |                   |       |
| 2.00 | 1.35 | 517     | 322     |                   |       |
| 3.00 | 2.03 | 230     | 143     |                   |       |
| 4.00 | 2.70 | 129     | 80      |                   |       |
| 5.00 | 3.38 | 83      | 52      |                   |       |