

Luminaire


Code DD0016A00A1LW
Name UNA PRO 150 H30 C 3000K/NSP - ALU

Measurem.

Code FTS1600166
Name UNA PRO 150 H30 C 3000K/NSP - ALU

Luminaire Flux	872 lm	Luminaire Power	11.0 W	Efficacy	79.258 lm/W	Efficiency	100.00%
Source Flux	872 lm	Maximum value	18553.53 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	150 mm	Width	150 mm	Height	300 mm
Rectangular Luminous Area		Length	80 mm	Width	80 mm	Height	0 mm
Horizontal Luminous Area		0.006400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001548 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-08-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		872 lm	
LED Flux=1071lm LED Power=8.6W Eff=81% EfcLed=125lm/W EfcLum=79lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=272160h							
C.I.E.	95 97 99 99 100			D DIN 5040		A61	
F UTE	0.99 A + 0.01 T			B NBN		BZ 1	

150mm x 150mm




Semipiani C

180.0 — 0.0

ULOR 0.65 %

DLOR 99.35 %

RN 0.65 %

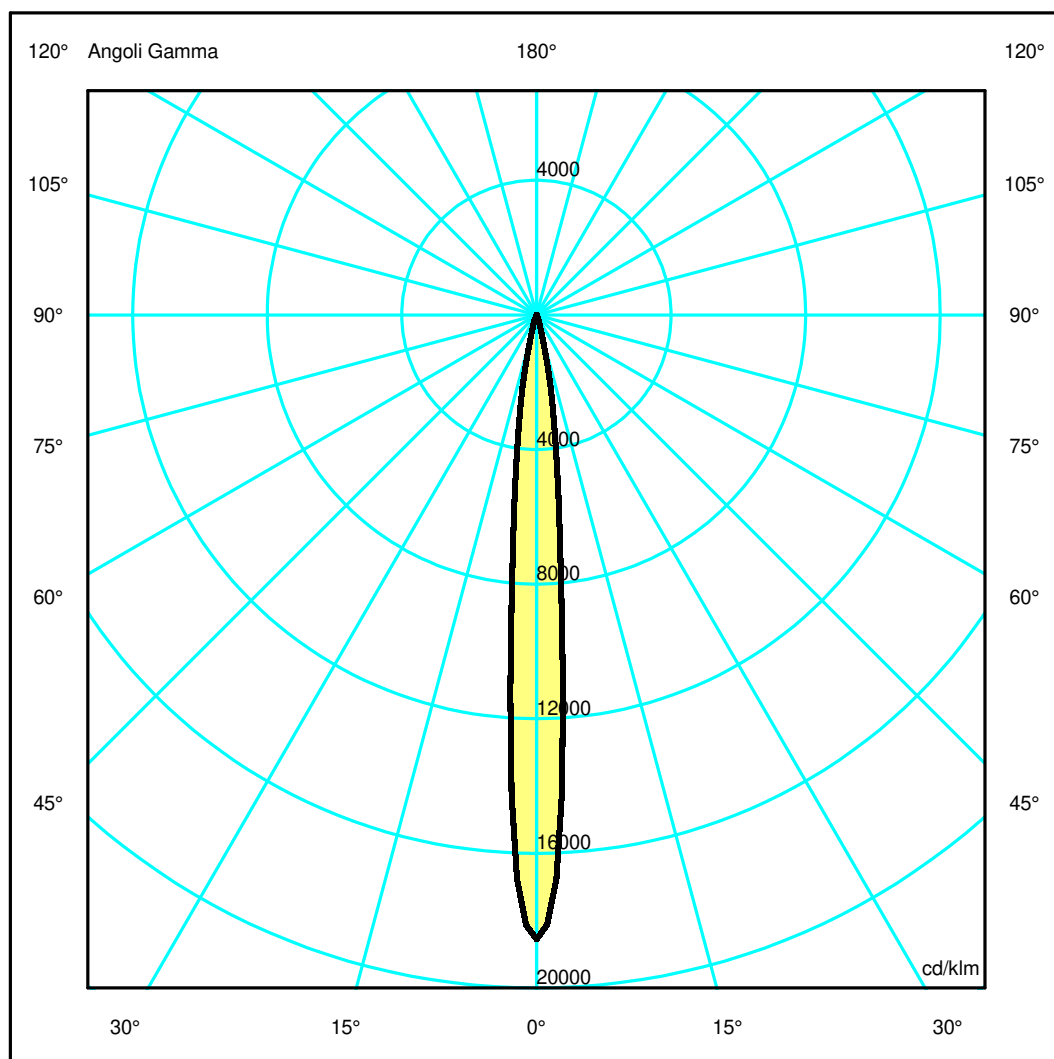

Luminaire

Code DD0016A00A1LW
Name UNA PRO 150 H30 C 3000K/NSP - ALU

Measurem.


Code FTS1600166
Name UNA PRO 150 H30 C 3000K/NSP - ALU

Luminaire Flux	872 lm	Luminaire Power	11.0 W	Efficacy	79.258 lm/W	Efficiency	100.00%
Source Flux	872 lm	Maximum value	18553.53 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	150 mm	Width	150 mm	Height	300 mm
Rectangular Luminous Area		Length	80 mm	Width	80 mm	Height	0 mm
Horizontal Luminous Area		0.006400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001548 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-08-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		872 lm	
LED Flux=1071lm LED Power=8.6W Eff=81% EfcLed=125lm/W EfcLum=79lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=272160h							
C.I.E.	95 97 99 99 100			D DIN 5040	A61		
F UTE	0.99 A + 0.01 T			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.08	0.17	0.25	0.33	0.41	OC	0.08	0.17	0.25	0.33	0.41
OB	0.08	0.17	0.25	0.33	0.41	OD	0.08	0.17	0.25	0.33	0.41

				Luminous Intensities [cd/klm]							
	0	5	15	25	35	45	55	65	75	85	
OA	16175.71	7457.86	547.34	63.14	24.80	13.31	11.80	12.05	5.73	7.30	
OB	16175.71	7457.86	547.34	63.14	24.80	13.31	11.80	12.05	5.73	7.30	
OC	16175.71	7457.86	547.34	63.14	24.80	13.31	11.80	12.05	5.73	7.30	
OD	16175.71	7457.86	547.34	63.14	24.80	13.31	11.80	12.05	5.73	7.30	

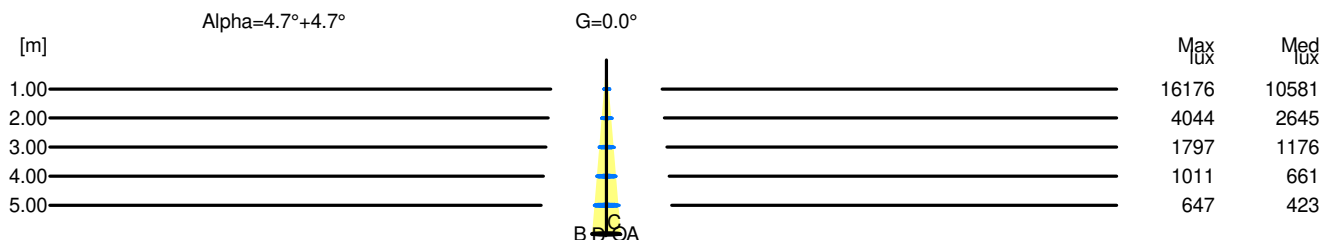

H[m]	D[m]	Max lux	Med lux	Alpha=4.7°+4.7°	G=0.0
1.00	0.17	16176	10581		
2.00	0.33	4044	2645		
3.00	0.50	1797	1176		
4.00	0.66	1011	661		
5.00	0.83	647	423		