

Luminaire

Code M257805
Name EVERYTHING 105 TONDO TRIMLESS ORIENTABILE LED 3000K FLOOD DEFL. METALLIZZATO

Measurem.

Code FTS1602326
Name EVERYTHING 105 TONDO TRIMLESS ORIENTABILE LED 3000K FLOOD DEFL. METALLIZZATO

Luminaire Flux	832.61 lm	Luminaire Power	13.00 W	Efficacy	64.05 lm/W	Efficiency	100.00%
Sources Flux	832.61 lm	Maximum value	2064.61 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	105 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-07-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		832.61 lm	
LED Flux=1390lm LED Power=13W Eff=59,9% EfcLed=107lm/W EfcLum=64lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	96 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=105mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

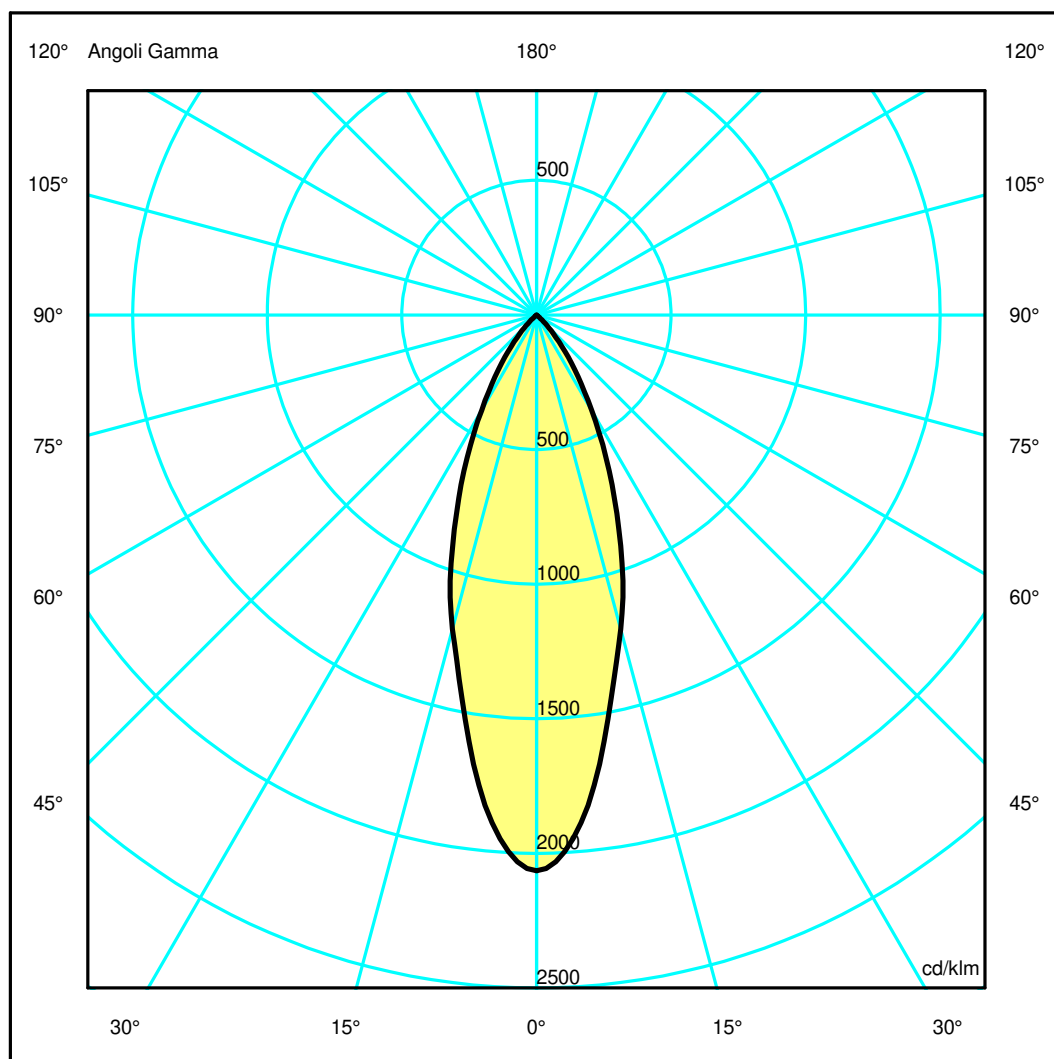

Luminaire

Code M257805
Name EVERYTHING 105 TONDO TRIMLESS ORIENTABILE LED 3000K FLOOD DEFL. METALLIZZATO

Measurem.


Code FTS1602326
Name EVERYTHING 105 TONDO TRIMLESS ORIENTABILE LED 3000K FLOOD DEFL. METALLIZZATO

Luminaire Flux	832.61 lm	Luminaire Power	13.00 W	Efficacy	64.05 lm/W	Efficiency	100.00%
Sources Flux	832.61 lm	Maximum value	2064.61 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	105 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-07-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		832.61 lm	
LED Flux=1390lm LED Power=13W Eff=59,9% EfcLed=107lm/W EfcLum=64lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	96 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.65	0.98	1.31	1.63	OC	0.33	0.65	0.98	1.31	1.63
OB	0.33	0.65	0.98	1.31	1.63	OD	0.33	0.65	0.98	1.31	1.63

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1719.02	1576.43	1005.10	532.10	205.92	46.40	0.98	0.46	0.31	0.25
OB	1719.02	1576.43	1005.10	532.10	205.92	46.40	0.98	0.46	0.31	0.25
OC	1719.02	1576.43	1005.10	532.10	205.92	46.40	0.98	0.46	0.31	0.25
OD	1719.02	1576.43	1005.10	532.10	205.92	46.40	0.98	0.46	0.31	0.25

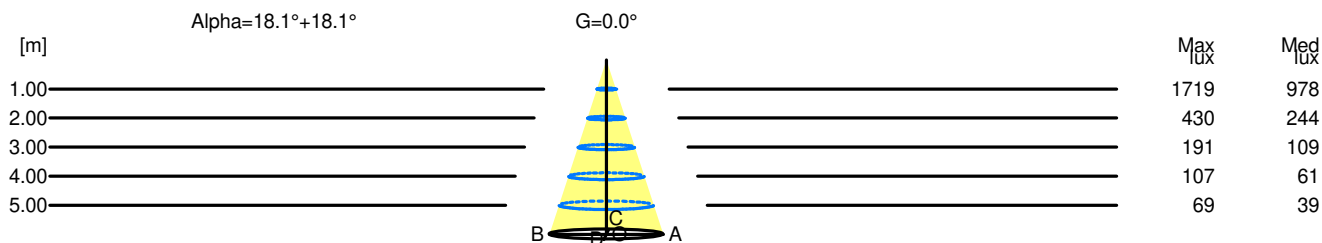

H[m]	D[m]	Max lux	Med lux	Alpha=18.1°+18.1°	G=0.0
1.00	0.65	1719	978		
2.00	1.31	430	244		
3.00	1.96	191	109		
4.00	2.61	107	61		
5.00	3.27	69	39		