

Luminaire


Code M325825
Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Measurement

Code FTS1602689
Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1006.81 lm	Luminaire Power	13.00 W	Efficacy	77.45 lm/W	Efficiency	100.00%
Sources Flux	1006.81 lm	Maximum value	3028.76 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1006.81 lm	
LED Flux=1330lm LED Power=13W Eff=75,7% EfcLed=102lm/W EfcLum=77lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	93 98 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

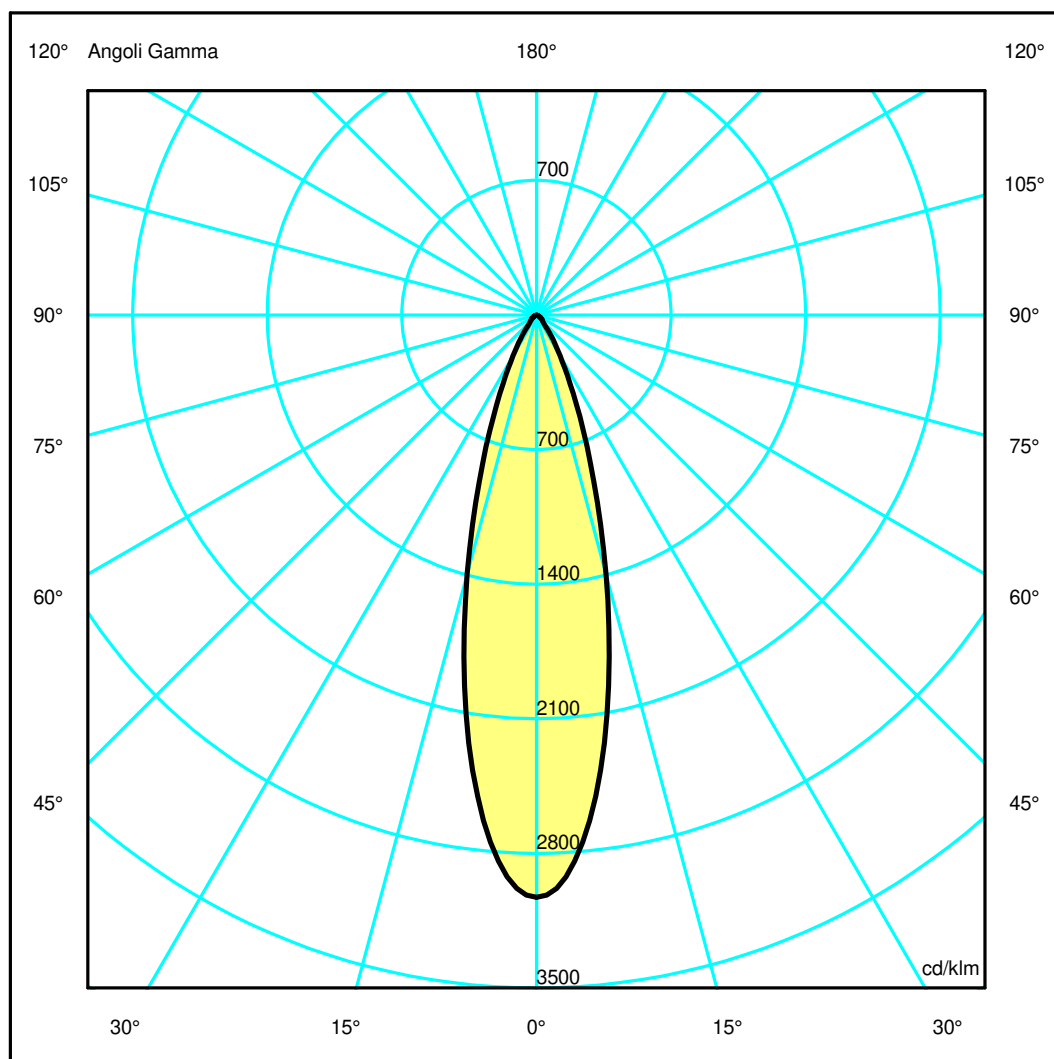

Luminaire

Code M325825
Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Measurement


Code FTS1602689
Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1006.81 lm	Luminaire Power	13.00 W	Efficacy	77.45 lm/W	Efficiency	100.00%
Sources Flux	1006.81 lm	Maximum value	3028.76 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1006.81 lm	
LED Flux=1330lm LED Power=13W Eff=75,7% EfcLed=102lm/W EfcLum=77lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	93 98 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	1.01	1.26	OC	0.25	0.50	0.75	1.01	1.26
OB	0.25	0.50	0.75	1.01	1.26	OD	0.25	0.50	0.75	1.01	1.26

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3049.39	2770.56	1403.70	454.66	131.56	45.87	28.44	13.36	2.50	0.00
OB	3049.39	2770.56	1403.70	454.66	131.56	45.87	28.44	13.36	2.50	0.00
OC	3049.39	2770.56	1403.70	454.66	131.56	45.87	28.44	13.36	2.50	0.00
OD	3049.39	2770.56	1403.70	454.66	131.56	45.87	28.44	13.36	2.50	0.00

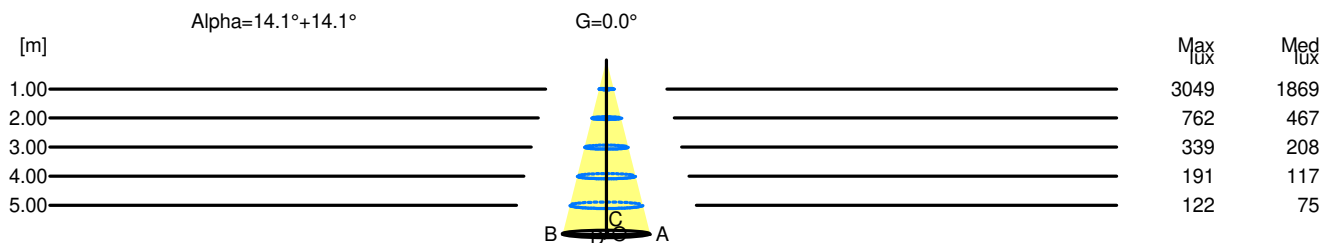

H[m]	D[m]	Max lux	Med lux	Alpha=14.1°+14.1°	G=0.0
1.00	0.50	3049	1869		
2.00	1.01	762	467		
3.00	1.51	339	208		
4.00	2.01	191	117		
5.00	2.52	122	75		