

Luminaire


Code M331325
Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Measurem.

Code FTS1602695
Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	853.86 lm	Luminaire Power	13.00 W	Efficacy	65.68 lm/W	Efficiency	100.00%
Sources Flux	853.86 lm	Maximum value	1395.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		853.86 lm	
LED Flux=1330lm LED Power=13W Eff=64,2% EfcLed=102lm/W EfcLum=66lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	91 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Diam=80mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

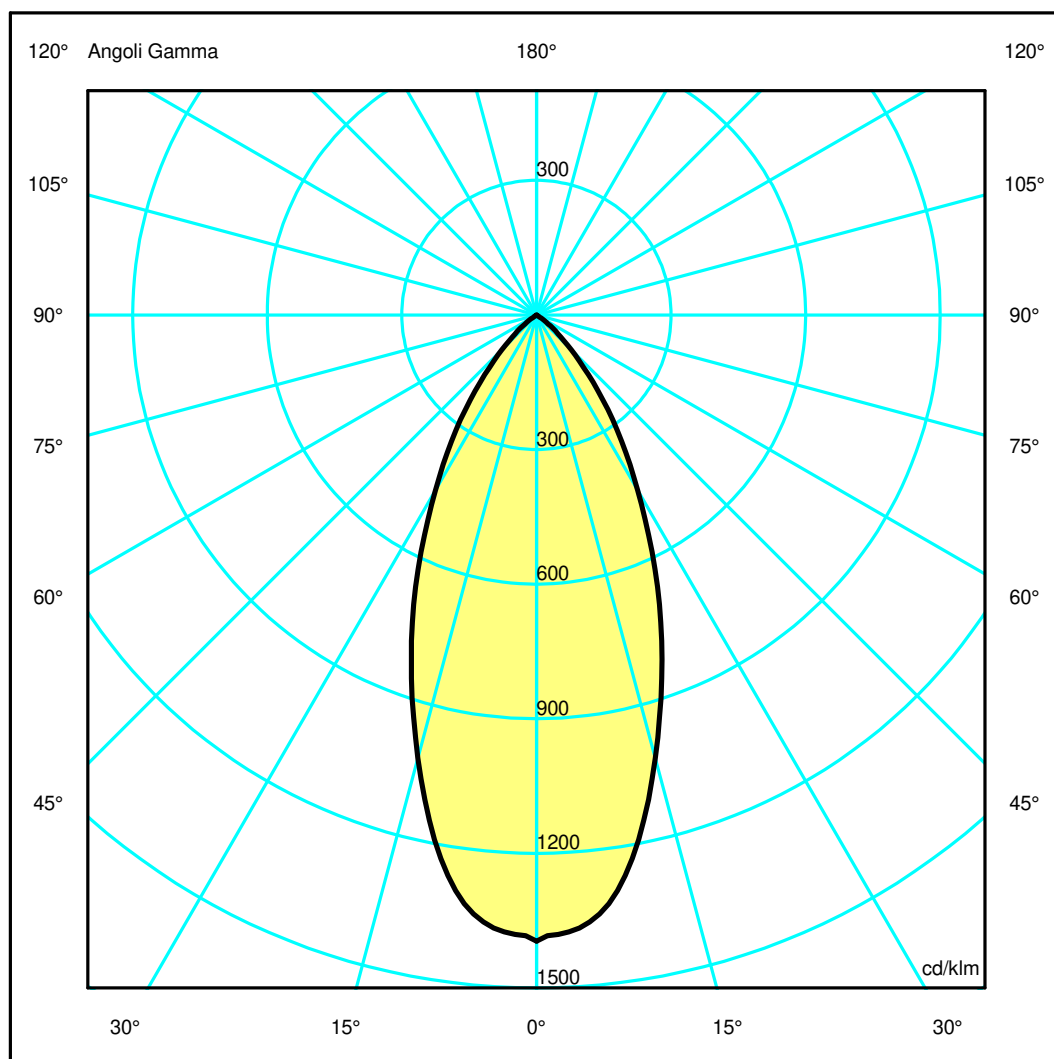

Luminaire

Code M331325

Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Measurement

Code FTS1602695


Name EVERYTHING 80 TONDO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	853.86 lm	Luminaire Power	13.00 W	Efficacy	65.68 lm/W	Efficiency	100.00%
Sources Flux	853.86 lm	Maximum value	1395.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		853.86 lm	
LED Flux=1330lm LED Power=13W Eff=64,2% EfcLed=102lm/W EfcLum=66lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	91 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.43	0.85	1.28	1.70	2.13	OC	0.43	0.85	1.28	1.70	2.13
OB	0.43	0.85	1.28	1.70	2.13	OD	0.43	0.85	1.28	1.70	2.13

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1191.82	1159.53	872.86	533.66	268.00	93.57	17.26	0.61	0.35	0.30
OB	1191.82	1159.53	872.86	533.66	268.00	93.57	17.26	0.61	0.35	0.30
OC	1191.82	1159.53	872.86	533.66	268.00	93.57	17.26	0.61	0.35	0.30
OD	1191.82	1159.53	872.86	533.66	268.00	93.57	17.26	0.61	0.35	0.30

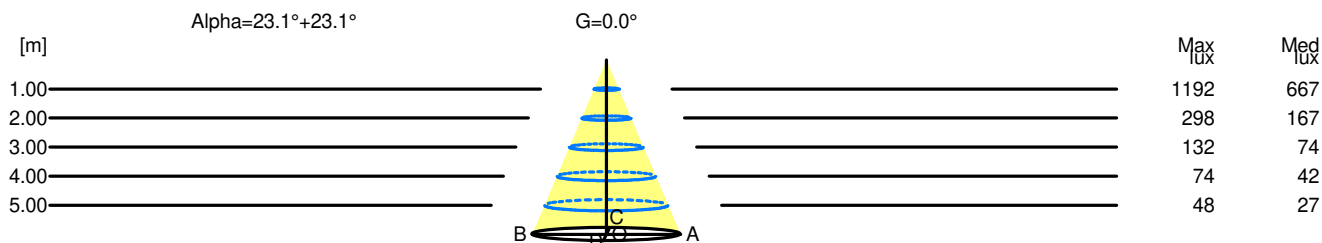

H[m]	D[m]	Max lux	Med lux	Alpha=23.1°+23.1°	G=0.0
1.00	0.85	1192	667		
2.00	1.70	298	167		
3.00	2.56	132	74		
4.00	3.41	74	42		
5.00	4.26	48	27		