

Luminaire


Code M326600
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 2700K SPOT DEFL. NERO

Measurem.

Code FTS1602668
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 2700K SPOT DEFL. NERO

Luminaire Flux	833.91 lm	Luminaire Power	13.00 W	Efficacy	64.15 lm/W	Efficiency	100.00%
Sources Flux	833.91 lm	Maximum value	4048.68 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		26-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		833.91 lm	
LED Flux=1330lm LED Power=13W Eff=62,7% EfcLed=102lm/W EfcLum=64lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Diam=80mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

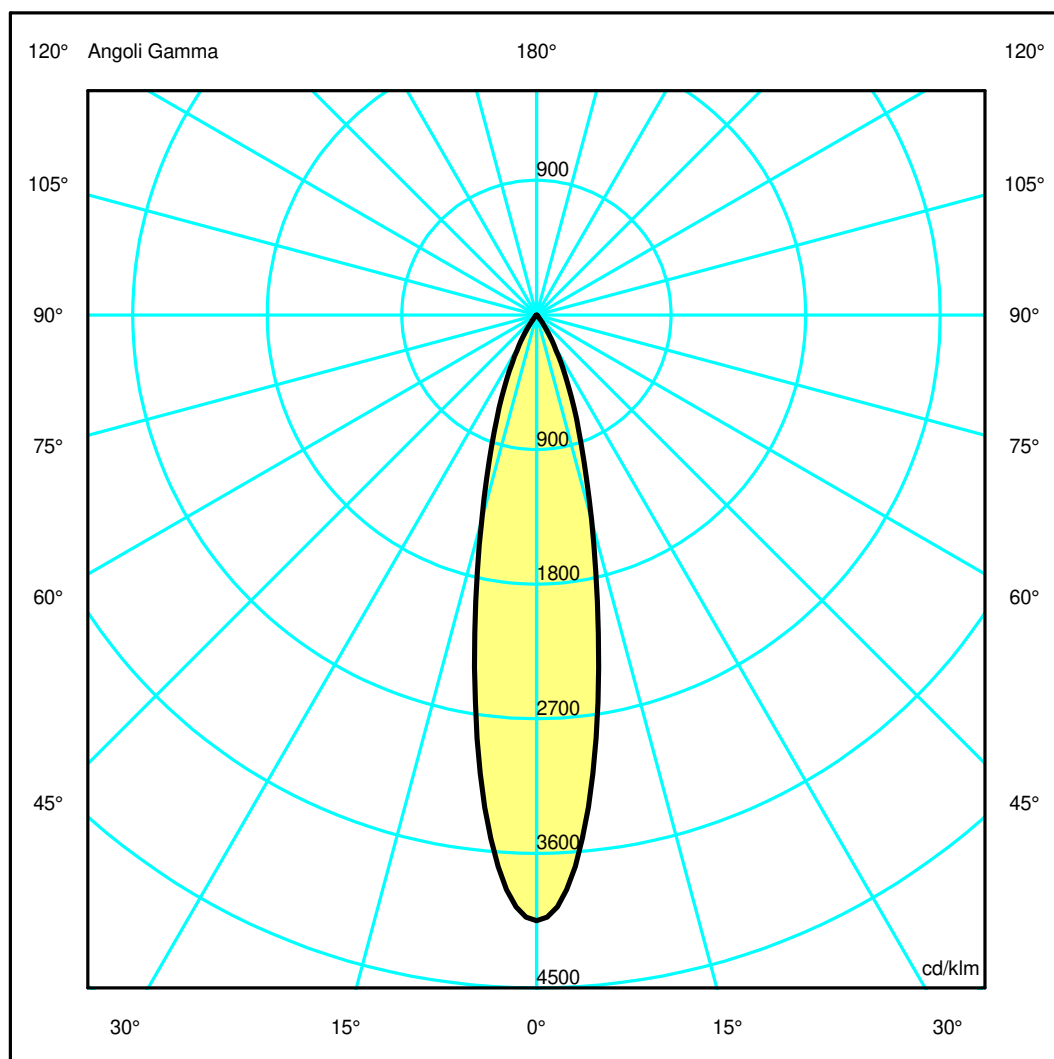

Luminaire

Code M326600
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 2700K SPOT DEFL. NERO

Measurem.


Code FTS1602668
Name EVERYTHING 80 TONDO TRIMLESS FISSO LED 2700K SPOT DEFL. NERO

Luminaire Flux	833.91 lm	Luminaire Power	13.00 W	Efficacy	64.15 lm/W	Efficiency	100.00%
Sources Flux	833.91 lm	Maximum value	4048.68 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		26-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		833.91 lm	
LED Flux=1330lm LED Power=13W Eff=62,7% EfcLed=102lm/W EfcLum=64lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.41	0.62	0.83	1.03	OC	0.21	0.41	0.62	0.83	1.03
OB	0.21	0.41	0.62	0.83	1.03	OD	0.21	0.41	0.62	0.83	1.03

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3376.23	2929.89	1183.13	394.32	80.29	14.06	2.48	0.82	0.45	0.27
OB	3376.23	2929.89	1183.13	394.32	80.29	14.06	2.48	0.82	0.45	0.27
OC	3376.23	2929.89	1183.13	394.32	80.29	14.06	2.48	0.82	0.45	0.27
OD	3376.23	2929.89	1183.13	394.32	80.29	14.06	2.48	0.82	0.45	0.27

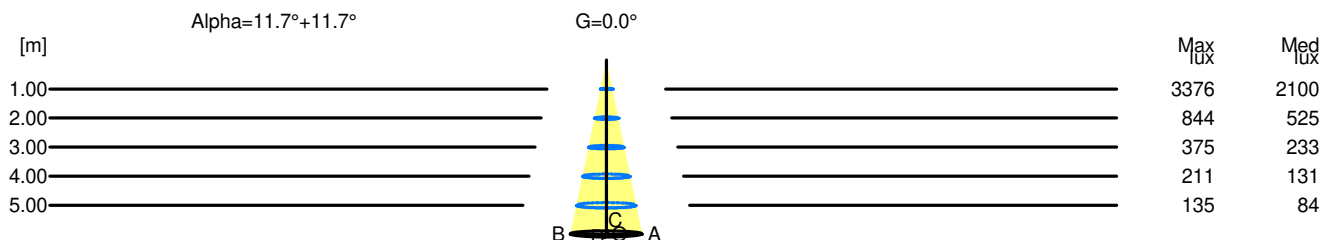

H[m]	D[m]	Max lux	Med lux	Alpha=11.7°+11.7°	G=0.0
1.00	0.41	3376	2100		
2.00	0.83	844	525		
3.00	1.24	375	233		
4.00	1.65	211	131		
5.00	2.07	135	84		