

Luminaire

Code M326805
Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. NERO

Measurement

Code FTS1602705
Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. NERO

Luminaire Flux	630.42 lm	Luminaire Power	13.00 W	Efficacy	48.49 lm/W	Efficiency	100.00%
Sources Flux	630.42 lm	Maximum value	1616.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		630.42 lm	
LED Flux=1330lm LED Power=13W Eff=47,4% EfcLed=102lm/W EfcLum=48lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	96 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

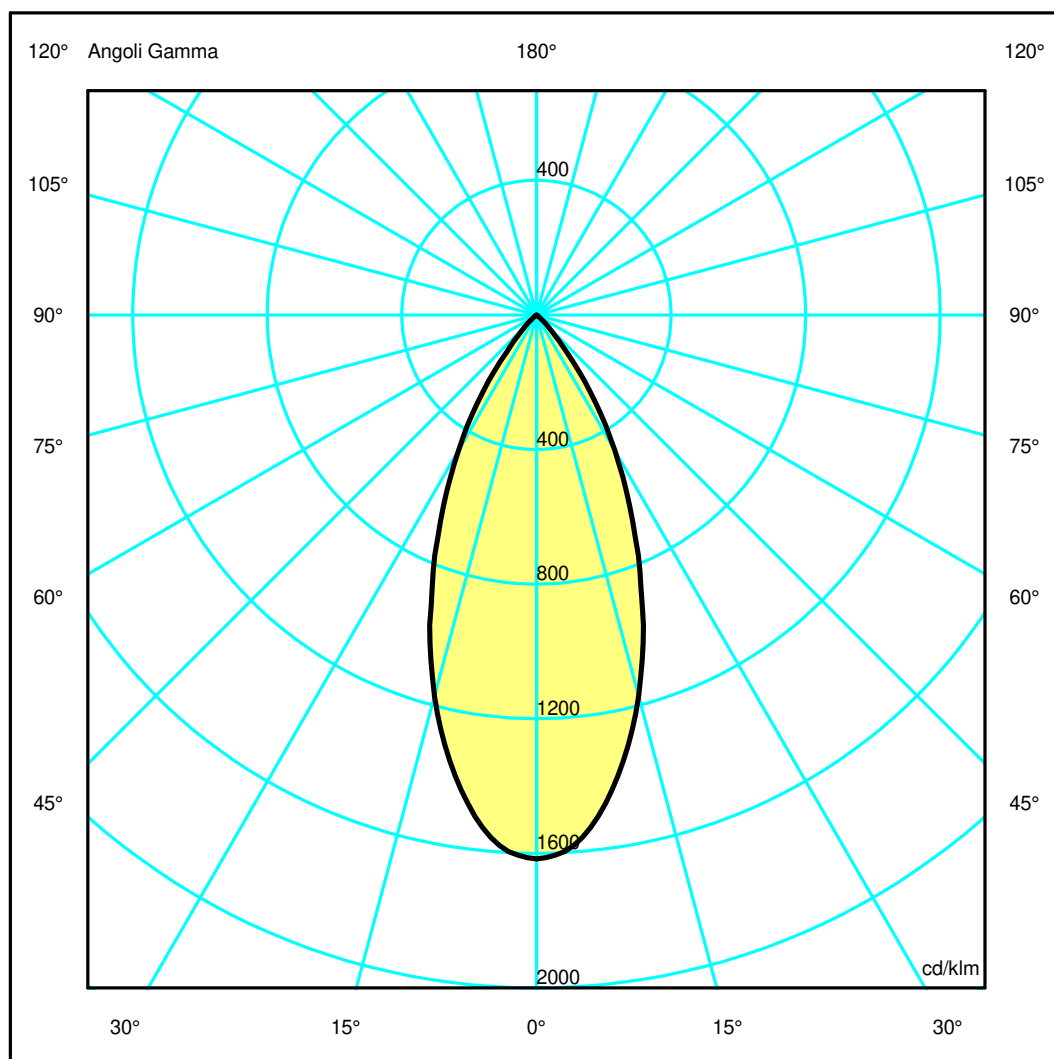

Luminaire

Code M326805
Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. NERO

Measurem.


Code FTS1602705
Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. NERO

Luminaire Flux	630.42 lm	Luminaire Power	13.00 W	Efficacy	48.49 lm/W	Efficiency	100.00%
Sources Flux	630.42 lm	Maximum value	1616.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		630.42 lm	
LED Flux=1330lm LED Power=13W Eff=47,4% EfcLed=102lm/W EfcLum=48lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	96 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.41	0.82	1.23	1.64	2.05	OC	0.41	0.82	1.23	1.64	2.05
OB	0.41	0.82	1.23	1.64	2.05	OD	0.41	0.82	1.23	1.64	2.05

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1019.13	982.68	738.59	425.27	173.15	31.47	3.91	0.95	0.36	0.10
OB	1019.13	982.68	738.59	425.27	173.15	31.47	3.91	0.95	0.36	0.10
OC	1019.13	982.68	738.59	425.27	173.15	31.47	3.91	0.95	0.36	0.10
OD	1019.13	982.68	738.59	425.27	173.15	31.47	3.91	0.95	0.36	0.10

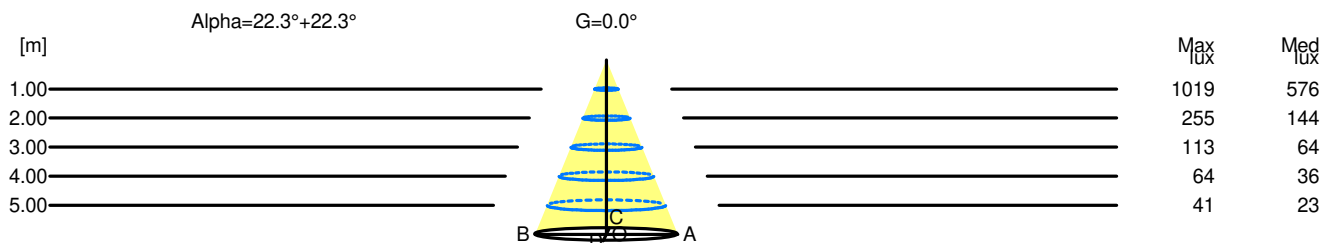

H[m]	D[m]	Max lux	Med lux	Alpha=22.3°+22.3°	G=0.0
1.00	0.82	1019	576		
2.00	1.64	255	144		
3.00	2.46	113	64		
4.00	3.28	64	36		
5.00	4.10	41	23		