

Luminaire

Code M331605
Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. METALLIZZATO

Measurem.

Code FTS1602697
Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. METALLIZZATO

Luminaire Flux	853.86 lm	Luminaire Power	13.00 W	Efficacy	65.68 lm/W	Efficiency	100.00%
Sources Flux	853.86 lm	Maximum value	1395.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		853.86 lm	
LED Flux=1330lm LED Power=13W Eff=64,2% EfcLed=102lm/W EfcLum=66lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	91 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Diam=80mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

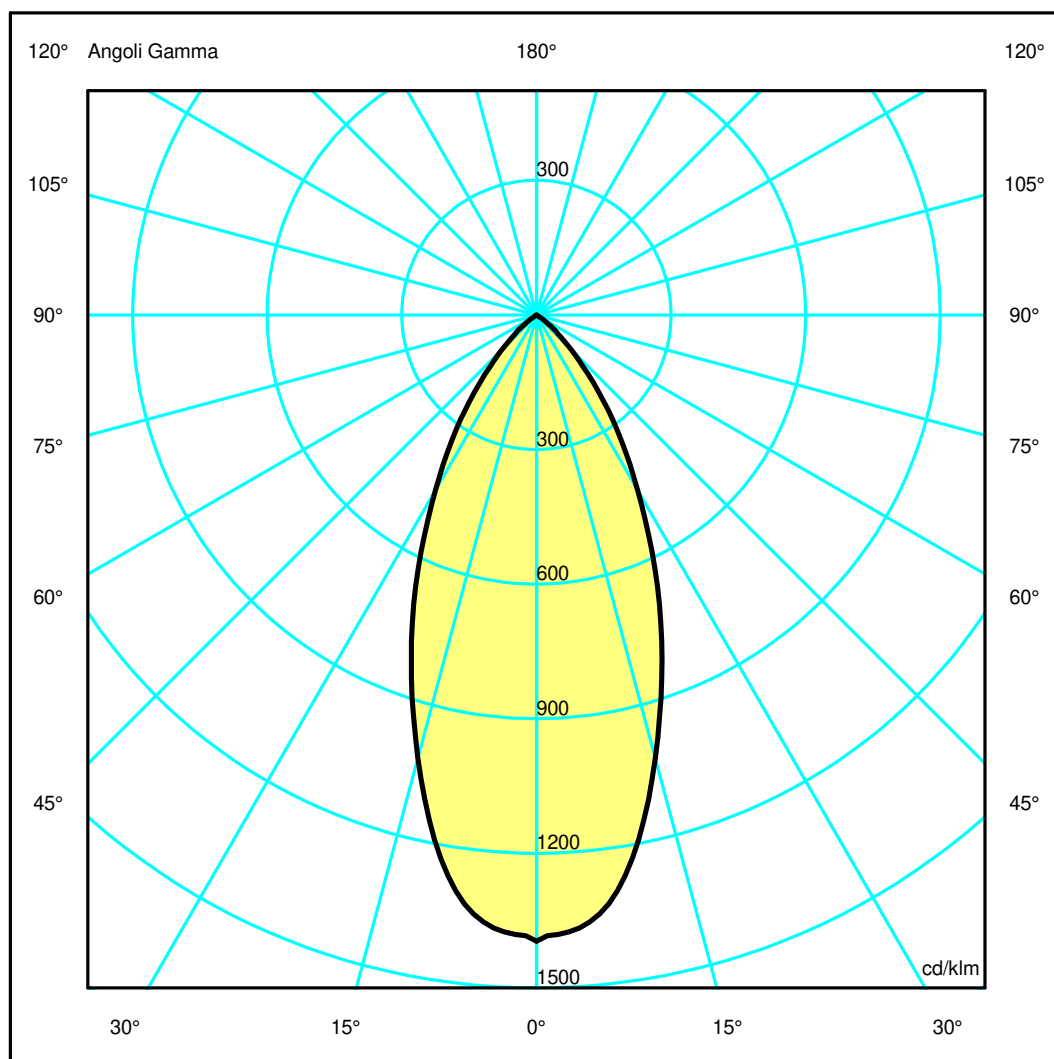

Luminaire


Code M331605
 Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. METALLIZZATO
Measurem.
 Code FTS1602697
 Name EVERYTHING 80 TONDO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. METALLIZZATO

Luminaire Flux	853.86 lm	Luminaire Power	13.00 W	Efficacy	65.68 lm/W	Efficiency	100.00%
Sources Flux	853.86 lm	Maximum value	1395.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		853.86 lm	
LED Flux=1330lm LED Power=13W Eff=64,2% EfcLed=102lm/W EfcLum=66lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	91 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.43	0.85	1.28	1.70	2.13	OC	0.43	0.85	1.28	1.70	2.13
OB	0.43	0.85	1.28	1.70	2.13	OD	0.43	0.85	1.28	1.70	2.13

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1191.82	1159.53	872.86	533.66	268.00	93.57	17.26	0.61	0.35	0.30
OB	1191.82	1159.53	872.86	533.66	268.00	93.57	17.26	0.61	0.35	0.30
OC	1191.82	1159.53	872.86	533.66	268.00	93.57	17.26	0.61	0.35	0.30
OD	1191.82	1159.53	872.86	533.66	268.00	93.57	17.26	0.61	0.35	0.30

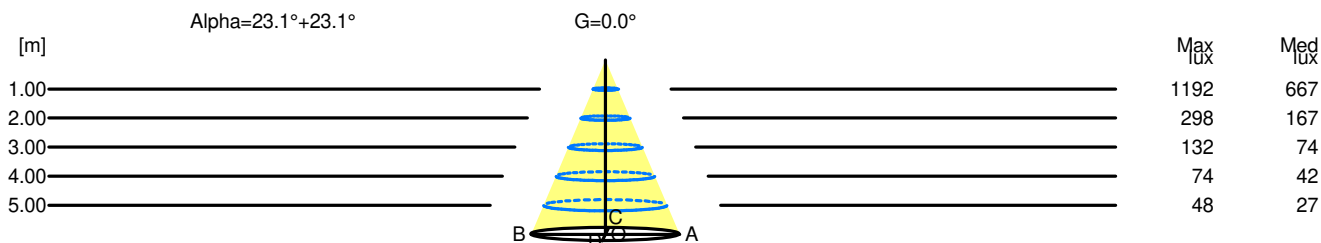

H[m]	D[m]	Max lux	Med lux	Alpha=23.1°+23.1°	G=0.0
1.00	0.85	1192	667		
2.00	1.70	298	167		
3.00	2.56	132	74		
4.00	3.41	74	42		
5.00	4.26	48	27		