

Luminaire

Code M327225

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K SPOT CORNICE BIANCO / DEFL. NERO


Measurem.

Code FTS1602717

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K SPOT CORNICE BIANCO / DEFL. NERO

Luminaire Flux	813.96 lm	Luminaire Power	13.00 W	Efficacy	62.61 lm/W	Efficiency	100.00%
Sources Flux	813.96 lm	Maximum value	3972.52 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	80 mm	Width	80 mm	Height	115 mm
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-06-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		813.96 lm	
LED Flux=1330lm LED Power=13W Eff=61,2% EfcLed=102lm/W EfcLum=63lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

80mm x 80mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

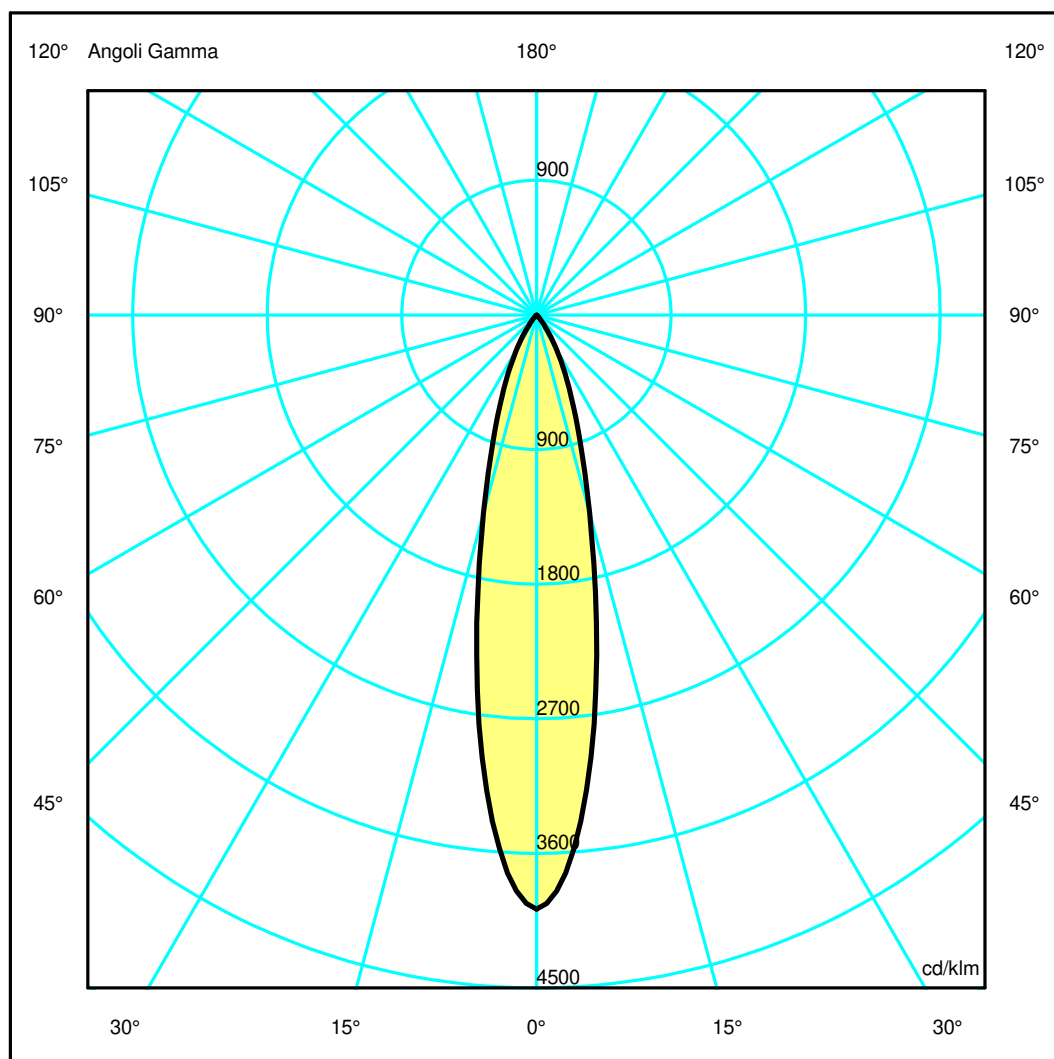

Luminaire

Code M327225

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K SPOT CORNICE BIANCO / DEFL. NERO

Measurem.

Code FTS1602717


Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K SPOT CORNICE BIANCO / DEFL. NERO

Luminaire Flux	813.96 lm	Luminaire Power	13.00 W	Efficacy	62.61 lm/W	Efficiency	100.00%
Sources Flux	813.96 lm	Maximum value	3972.52 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-06-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		813.96 lm	
LED Flux=1330lm LED Power=13W Eff=61,2% EfcLed=102lm/W EfcLum=63lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.20	0.41	0.61	0.82	1.02	OC	0.20	0.41	0.61	0.82	1.02
OB	0.20	0.41	0.61	0.82	1.02	OD	0.20	0.41	0.61	0.82	1.02

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3233.47	2766.85	1115.61	392.60	100.56	15.21	2.49	0.58	0.33	0.11
OB	3233.47	2766.85	1115.61	392.60	100.56	15.21	2.49	0.58	0.33	0.11
OC	3233.47	2766.85	1115.61	392.60	100.56	15.21	2.49	0.58	0.33	0.11
OD	3233.47	2766.85	1115.61	392.60	100.56	15.21	2.49	0.58	0.33	0.11

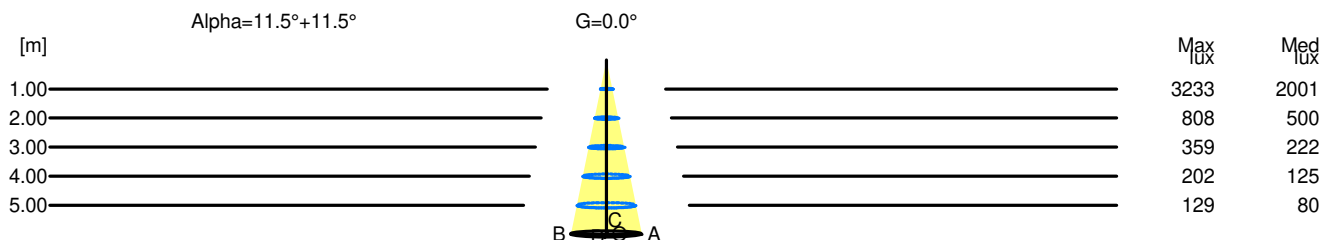

H[m]	D[m]	Max lux	Med lux	Alpha=11.5°+11.5°	G=0.0
1.00	0.41	3233	2001		
2.00	0.82	808	500		
3.00	1.22	359	222		
4.00	1.63	202	125		
5.00	2.04	129	80		