Luminaire
Code M327025
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO
Measurem.
Code FTS1602743
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1002.82 lm	Luminaire Power	13.00 W	Efficacy	77.14 lm/W	Efficiency	100.00%
Sources Flux	1002.82 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Rectangular Luminaire	Length	80 mm	Width	80 mm	Height 115 mm
Round Luminous Area	Diam.	50 mm	Height	0 mm	
Horizontal Luminous Area	0.001963 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.000475 m2	
Coordinate system	CG		Symmetry Type	Rotosymmetrical	
Date	08-04-2015		Maximum Gamma Angle	90	
Measurement Distance	0.00		Measurement Flux	1002.82 lm	

LED Flux=1330lm LED Power=13W Eff=75,4% EfcLed=102lm/W EfcLum=77lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	94 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

80mm x 80mm



Semipiani C

180.0 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

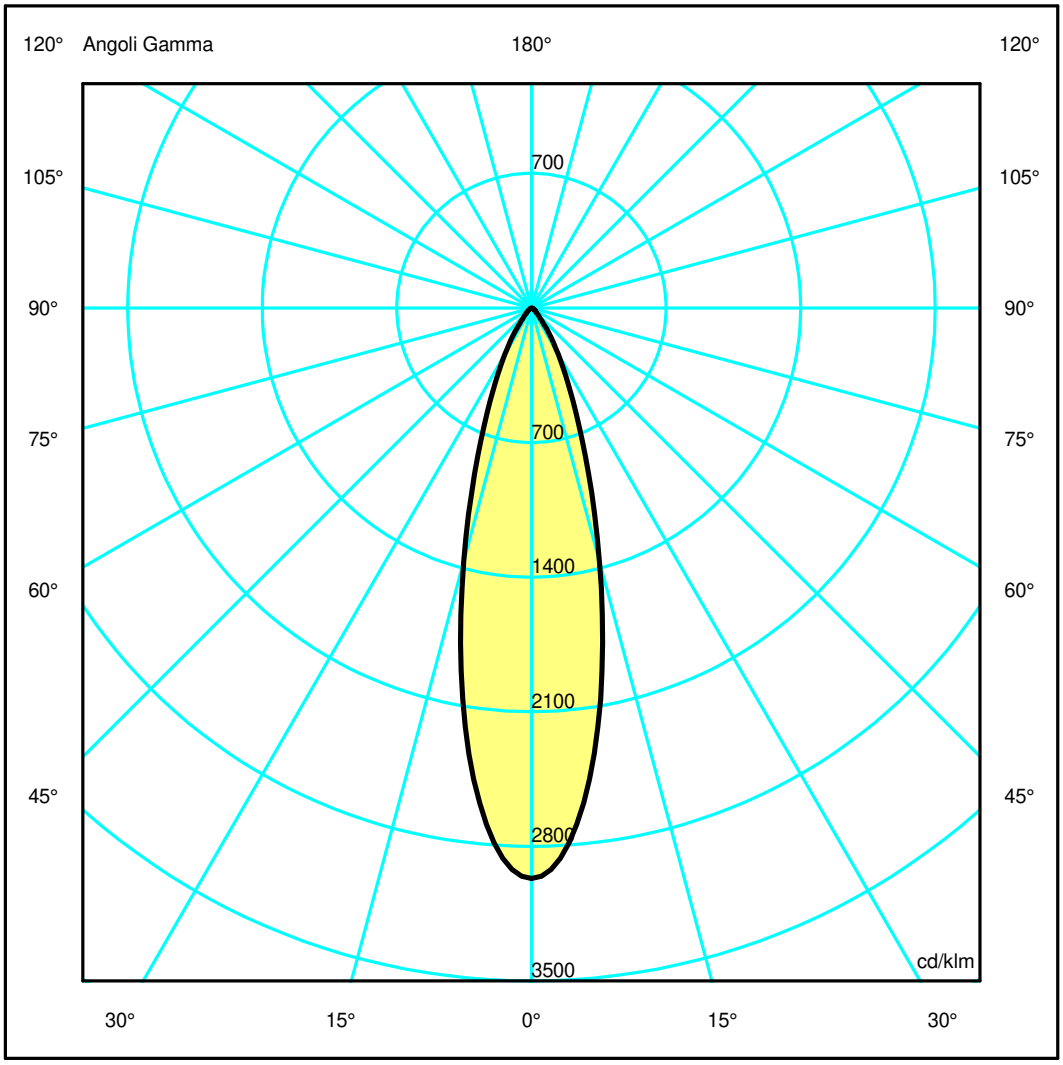

Artemide

Luminaire
Code M327025
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO
Measurem.
Code FTS1602743
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1002.82 lm	Luminaire Power	13.00 W	Efficacy	77.14 lm/W	Efficiency	100.00%
Sources Flux	1002.82 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Rectangular Luminaire	Length	80 mm	Width	80 mm	Height 115 mm
Round Luminous Area	Diam.	50 mm	Height	0 mm	
Horizontal Luminous Area	0.001963 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.000475 m2	
Coordinate system	CG		Symmetry Type	Rotosymmetrical	
Date	08-04-2015		Maximum Gamma Angle	90	
Measurement Distance	0.00		Measurement Flux	1002.82 lm	

LED Flux=1330lm LED Power=13W Eff=75,4% EfcLed=102lm/W EfcLum=77lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	94 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	1.00	1.26	OC	0.25	0.50	0.75	1.00	1.26
OB	0.25	0.50	0.75	1.00	1.26	OD	0.25	0.50	0.75	1.00	1.26

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	2975.16	2702.99	1367.93	478.51	151.57	41.56	21.41	11.09	2.92	0.00
OB	2975.16	2702.99	1367.93	478.51	151.57	41.56	21.41	11.09	2.92	0.00
OC	2975.16	2702.99	1367.93	478.51	151.57	41.56	21.41	11.09	2.92	0.00
OD	2975.16	2702.99	1367.93	478.51	151.57	41.56	21.41	11.09	2.92	0.00

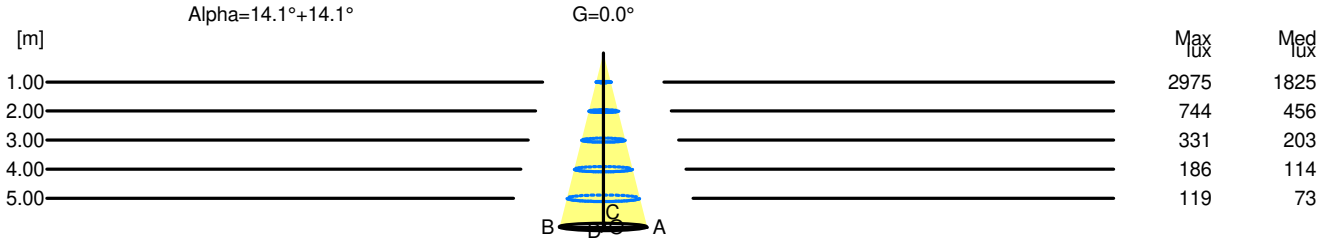

H[m]	D[m]	Max lux	Med lux	Alpha=14.1°+14.1° G=0.0
1.00	0.50	2975	1825	
2.00	1.00	744	456	
3.00	1.51	331	203	
4.00	2.01	186	114	
5.00	2.51	119	73	