


Luminaire

Code M330725
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. METALLIZZATO


Measurem.

Code FTS1602749
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	880.46 lm	Luminaire Power	13.00 W	Efficacy	67.73 lm/W	Efficiency	100.00%
Sources Flux	880.46 lm	Maximum value	1123.29 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		09-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		880.46 lm	
LED Flux=1330lm LED Power=13W Eff=66,2% EfcLed=102lm/W EfcLum=68lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	89 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

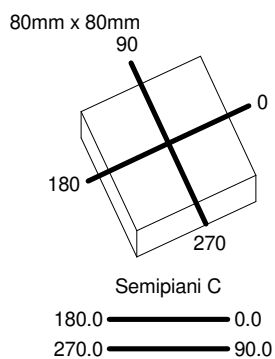

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

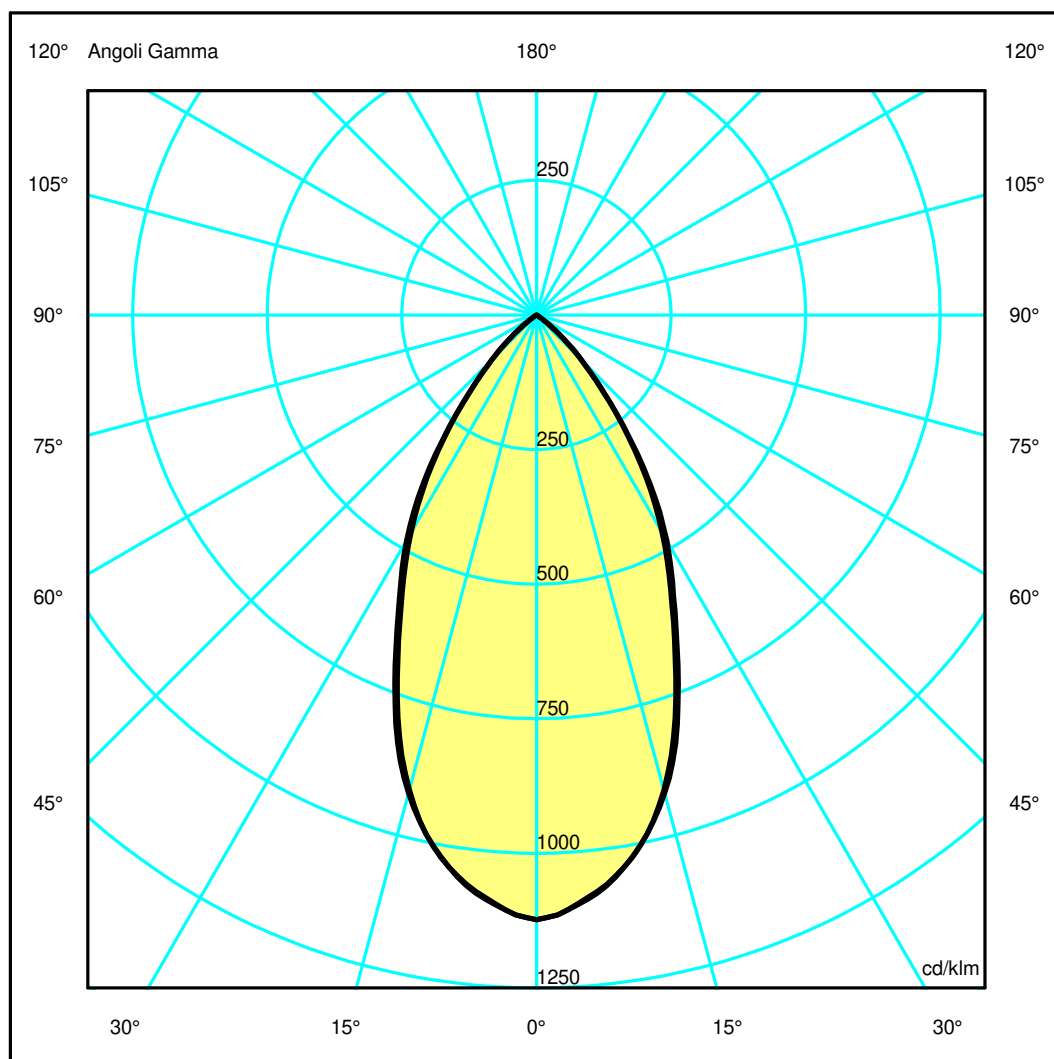

Luminaire

Code M330725

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Measurem.

Code FTS1602749


Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. METALLIZZATO

Luminaire Flux	880.46 lm	Luminaire Power	13.00 W	Efficacy	67.73 lm/W	Efficiency	100.00%
Sources Flux	880.46 lm	Maximum value	1123.29 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		09-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		880.46 lm	
LED Flux=1330lm LED Power=13W Eff=66,2% EfcLed=102lm/W EfcLum=68lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	89 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.50	1.01	1.51	2.02	2.52	OC	0.49	0.99	1.48	1.97	2.47
OB	0.50	1.01	1.51	2.02	2.52	OD	0.49	0.99	1.48	1.97	2.47

				Luminous Intensities [cd/klm]							
	0	5	15	25	35	45	55	65	75	85	
OA	989.01	956.34	809.58	535.66	305.51	104.20	12.72	0.00	0.00	0.00	
OB	989.01	956.34	809.58	535.66	305.51	104.20	12.72	0.00	0.00	0.00	
OC	989.01	959.05	804.13	524.32	296.78	102.75	13.27	0.00	0.00	0.00	
OD	989.01	959.05	804.13	524.32	296.78	102.75	13.27	0.00	0.00	0.00	

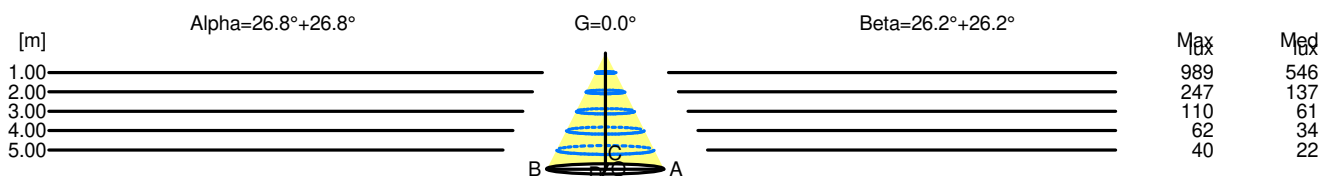

H[m]	D[m]	Max lux	Med lux	Alpha=26.8°+26.8°	G=0.0
1.00	1.01	989	546		
2.00	2.02	247	137		
3.00	3.03	110	61		
4.00	4.04	62	34		
5.00	5.04	40	22		

H[m]	D[m]	Max lux	Med lux	Beta=26.2°+26.2°	G=0.0
1.00	0.99	989	546		
2.00	1.97	247	137		
3.00	2.96	110	61		
4.00	3.94	62	34		
5.00	4.93	40	22		