

Luminaire

Code M327425
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. NERO

Measurem.

Code FTS1602753
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. NERO

Luminaire Flux	657.02 lm	Luminaire Power	13.00 W	Efficacy	50.54 lm/W	Efficiency	100.00%
Sources Flux	657.02 lm	Maximum value	1528.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		657.02 lm	
LED Flux=1330lm LED Power=13W Eff=49,4% EfcLed=102lm/W EfcLum=51lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	95 100 100 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	


80mm x 80mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

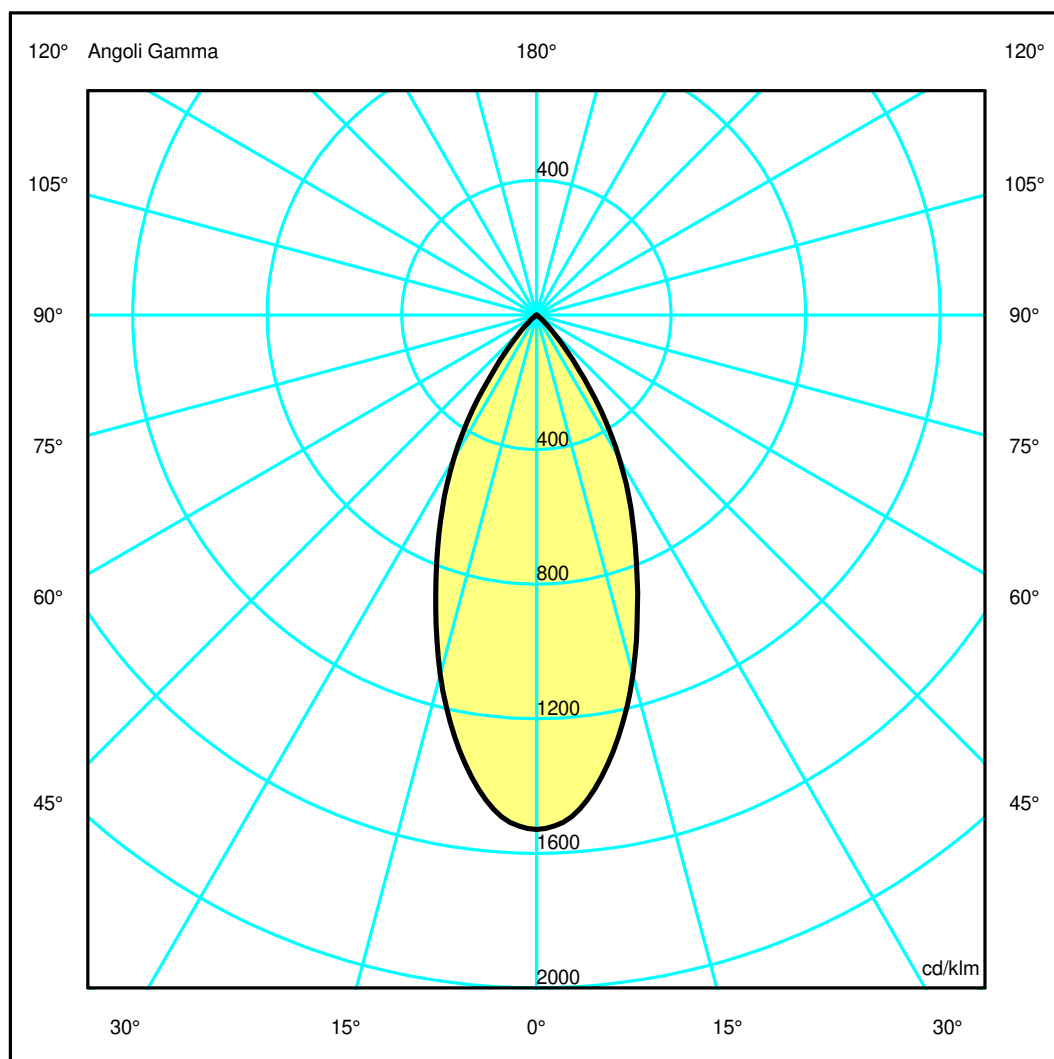

Luminaire

Code M327425

Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. NERO

Measurem.

Code FTS1602753


Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 2700K WIDE FLOOD CORNICE BIANCO / DEFL. NERO

Luminaire Flux	657.02 lm	Luminaire Power	13.00 W	Efficacy	50.54 lm/W	Efficiency	100.00%
Sources Flux	657.02 lm	Maximum value	1528.55 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-06-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		657.02 lm	
LED Flux=1330lm LED Power=13W Eff=49,4% EfcLed=102lm/W EfcLum=51lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	95 100 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.42	0.84	1.25	1.67	2.09	OC	0.42	0.84	1.25	1.67	2.09
OB	0.42	0.84	1.25	1.67	2.09	OD	0.42	0.84	1.25	1.67	2.09

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1004.29	968.14	726.74	443.60	200.50	39.45	4.60	0.94	0.50	0.15
OB	1004.29	968.14	726.74	443.60	200.50	39.45	4.60	0.94	0.50	0.15
OC	1004.29	968.14	726.74	443.60	200.50	39.45	4.60	0.94	0.50	0.15
OD	1004.29	968.14	726.74	443.60	200.50	39.45	4.60	0.94	0.50	0.15

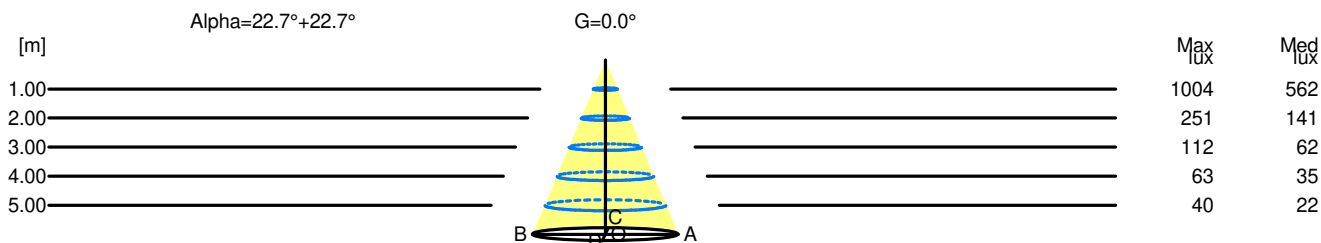

H[m]	D[m]	Max lux	Med lux	Alpha=22.7°+22.7°	G=0.0
1.00	0.84	1004	562		
2.00	1.67	251	141		
3.00	2.51	112	62		
4.00	3.35	63	35		
5.00	4.18	40	22		