


Luminaire

Code M327705
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. BIANCO


Measurement

Code FTS1602763
Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. BIANCO

Luminaire Flux	985.53 lm	Luminaire Power	13.00 W	Efficacy	75.81 lm/W	Efficiency	100.00%
Sources Flux	985.53 lm	Maximum value	1194.46 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		985.53 lm	
LED Flux=1330lm LED Power=13W Eff=74,1% EfcLed=102lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	83 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

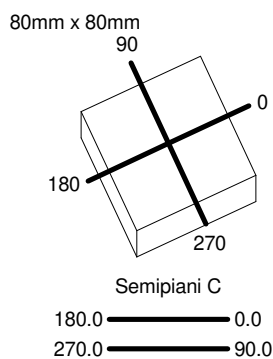

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

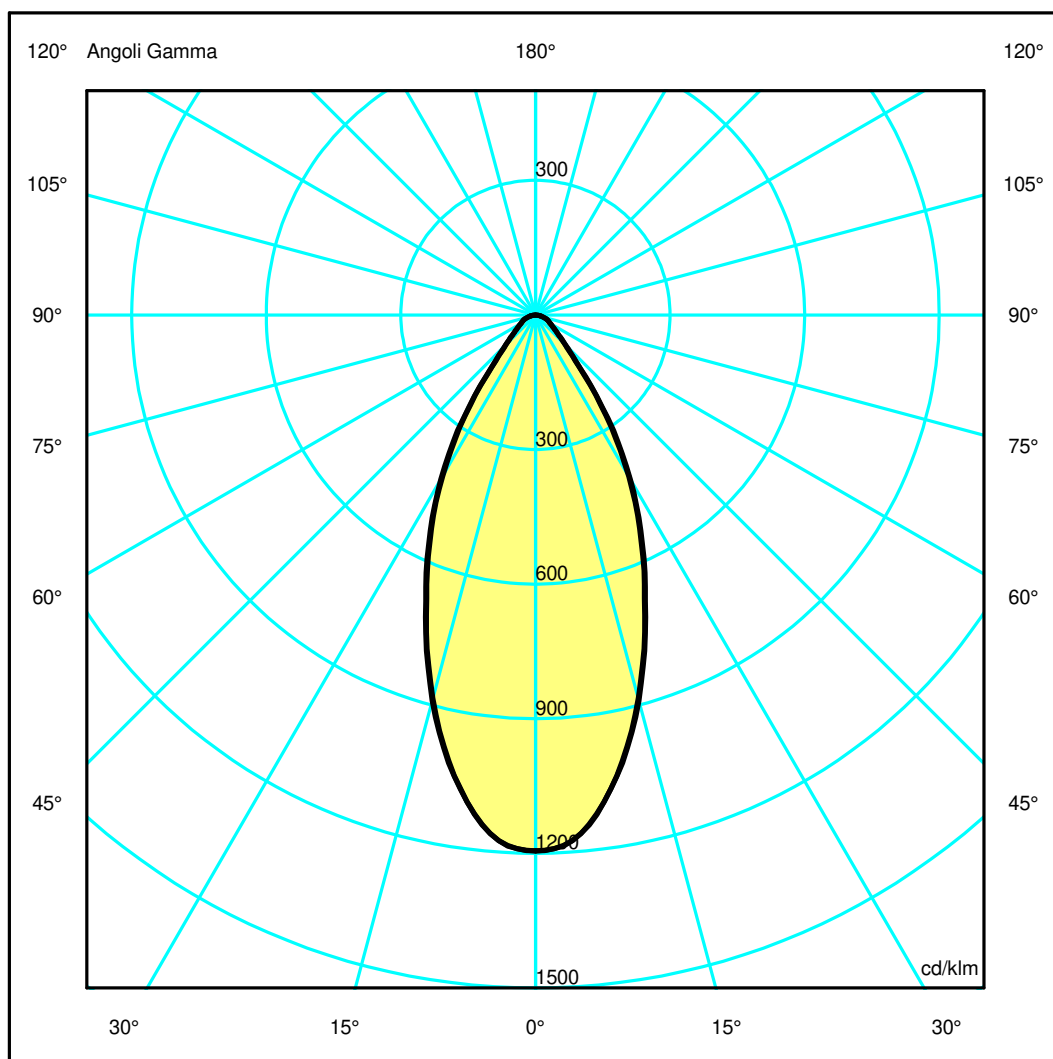

Luminaire

Code M327705

Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. BIANCO

Measurem.

Code FTS1602763


Name EVERYTHING 80 QUADRATO TRIMLESS ORIENTABILE LED 2700K WIDE FLOOD DEFL. BIANCO

Luminaire Flux	985.53 lm	Luminaire Power	13.00 W	Efficacy	75.81 lm/W	Efficiency	100.00%
Sources Flux	985.53 lm	Maximum value	1194.46 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		08-04-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		985.53 lm	
LED Flux=1330lm LED Power=13W Eff=74,1% EfcLed=102lm/W EfcLum=76lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	83 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.44	0.89	1.33	1.77	2.22	OC	0.44	0.88	1.32	1.76	2.19
OB	0.44	0.89	1.33	1.77	2.22	OD	0.44	0.88	1.32	1.76	2.19

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1177.18	1143.13	876.80	555.91	276.52	93.08	48.31	31.71	18.10	4.76
OB	1177.18	1143.13	876.80	555.91	276.52	93.08	48.31	31.71	18.10	4.76
OC	1177.18	1142.72	871.34	549.64	269.21	92.29	47.72	31.17	17.77	4.79
OD	1177.18	1142.72	871.34	549.64	269.21	92.29	47.72	31.17	17.77	4.79

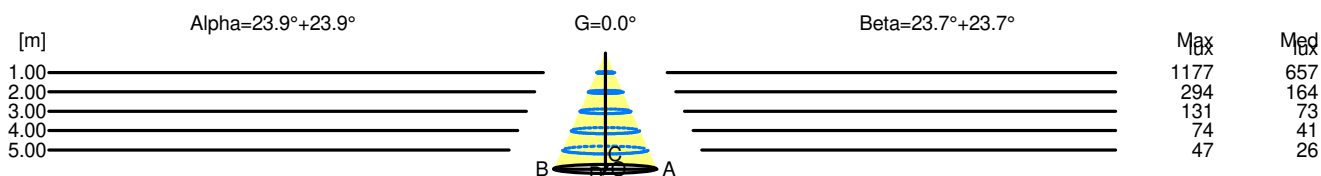

H[m]	D[m]	Max lux	Med lux	Alpha=23.9°+23.9°	G=0.0
1.00	0.89	1177	657		
2.00	1.77	294	164		
3.00	2.66	131	73		
4.00	3.55	74	41		
5.00	4.43	47	26		

H[m]	D[m]	Max lux	Med lux	Beta=23.7°+23.7°	G=0.0
1.00	0.88	1177	657		
2.00	1.76	294	164		
3.00	2.63	131	73		
4.00	3.51	74	41		
5.00	4.39	47	26		