

## Luminaire

Code CA00204  
Name GOPLE 60 SPOT TRK16 48V WF 2700K NRO

## Measurerm.

Code FTS2200085  
Name GOPLE 60 SPOT TRK16 48V WF 2700K NRO

Luminaire Flux	503 lm	Luminaire Power	9.0 W	Efficacy	55.876 lm/W	Efficiency	100.00%
Source Flux	503 lm	Maximum value	3590.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area			0.000962 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000233 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		503 lm	

LED Flux=805lm LED Power=7.9W Eff=62% EfcLed=102lm/W EfcLum=56lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E. 98 100 100 100 100  
F UTE --

D DIN 5040  
B NBN

A60  
BZ 1


Diam=55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

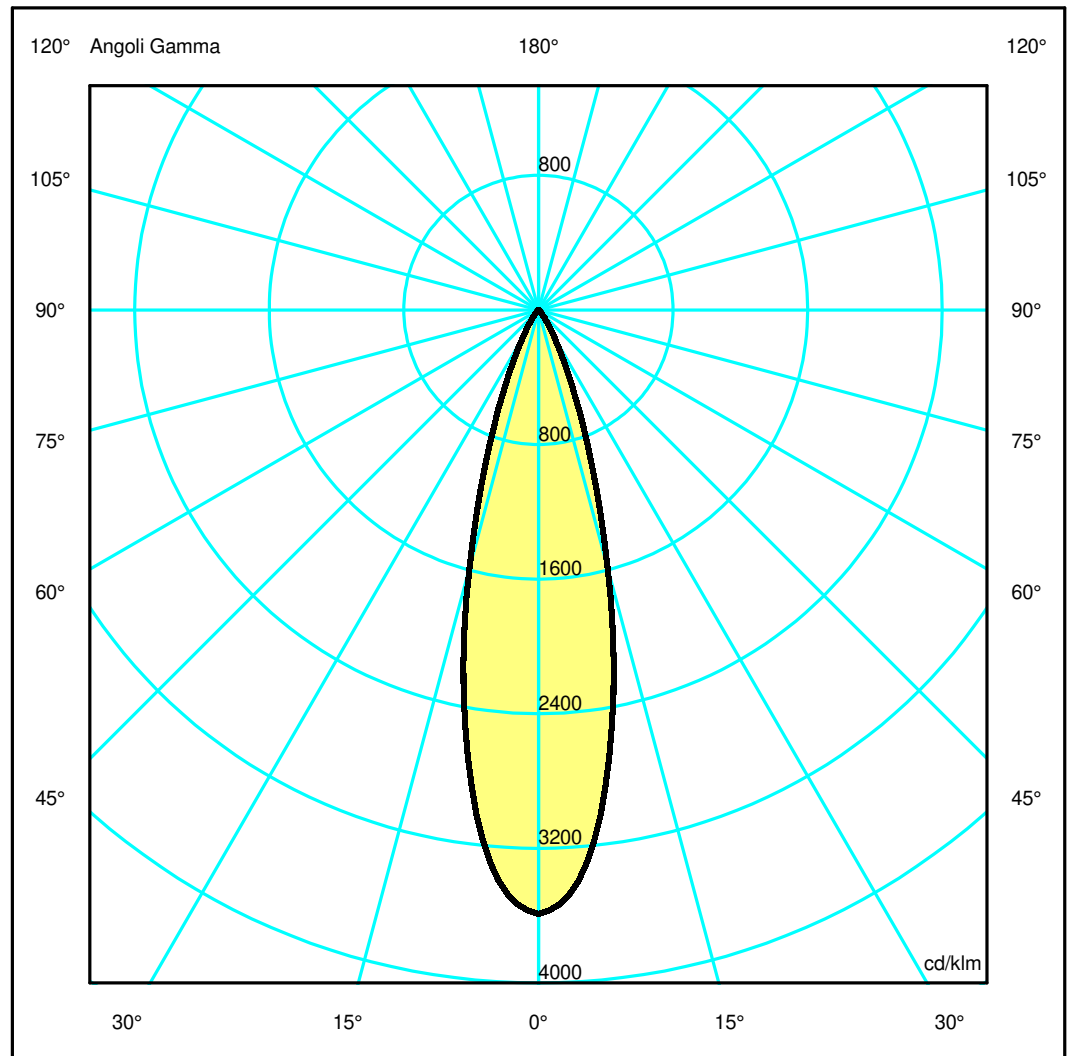

## Luminaire

Code CA00204  
Name GOPLE 60 SPOT TRK16 48V WF 2700K NRO

## Measurum.


Code FTS2200085  
Name GOPLE 60 SPOT TRK16 48V WF 2700K NRO

Luminaire Flux	503 lm	Luminaire Power	9.0 W	Efficacy	55.876 lm/W	Efficiency	100.00%
Source Flux	503 lm	Maximum value	3590.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		503 lm	
LED Flux=805lm LED Power=7.9W Eff=62% EfcLed=102lm/W EfcLum=56lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.49	0.74	0.99	1.24	OC	0.25	0.49	0.74	0.99	1.24
OB	0.25	0.49	0.74	0.99	1.24	OD	0.25	0.49	0.74	0.99	1.24

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1805.47	1657.48	799.98	207.91	42.53	9.42	2.41	0.41	0.00	0.00
OB	1805.47	1657.48	799.98	207.91	42.53	9.42	2.41	0.41	0.00	0.00
OC	1805.47	1657.48	799.98	207.91	42.53	9.42	2.41	0.41	0.00	0.00
OD	1805.47	1657.48	799.98	207.91	42.53	9.42	2.41	0.41	0.00	0.00

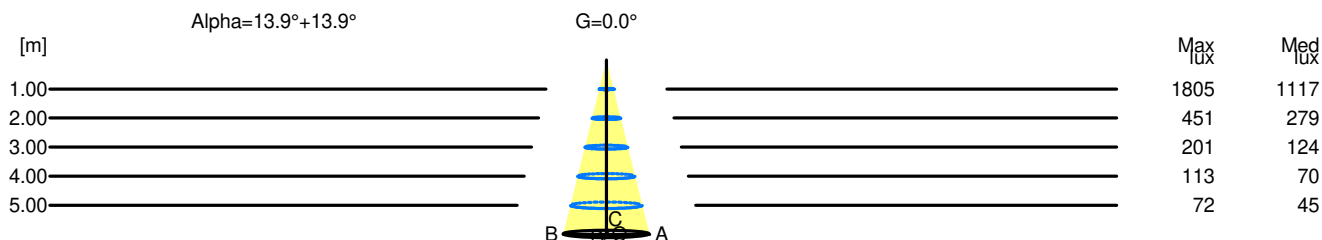

H[m]	D[m]	Max lux	Med lux	Alpha=13.9°+13.9°	G=0.0
1.00	0.49	1805	1117		
2.00	0.99	451	279		
3.00	1.48	201	124		
4.00	1.98	113	70		
5.00	2.47	72	45		