


Luminaire

Code BW40204+AP91200
Name VECTOR SPOT 55 CHANNEL 14W 2700K WF BLK + LENS FOR ELLIPTICAL EMISSION


Measurem.

Code FTS2300099
Name VECTOR SPOT 55 CHANNEL 14W 2700K WF BLK + LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	854 lm	Luminaire Power	14.0 W	Efficacy	61.016 lm/W	Efficiency	100.00%
Source Flux	854 lm	Maximum value	2589.45 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	109 mm		
Round Luminous Area		Diam.	51 mm	Height	0 mm		
Horizontal Luminous Area		0.002043 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000494 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		24-02-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		854 lm	
LED Flux=1594lm LED Power=14W Eff=54% EfcLed=114lm/W EfcLum=61lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	93 98 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

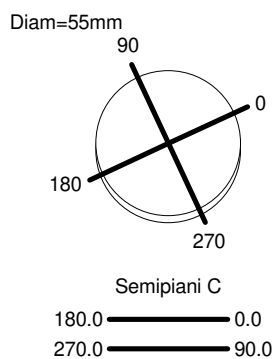

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

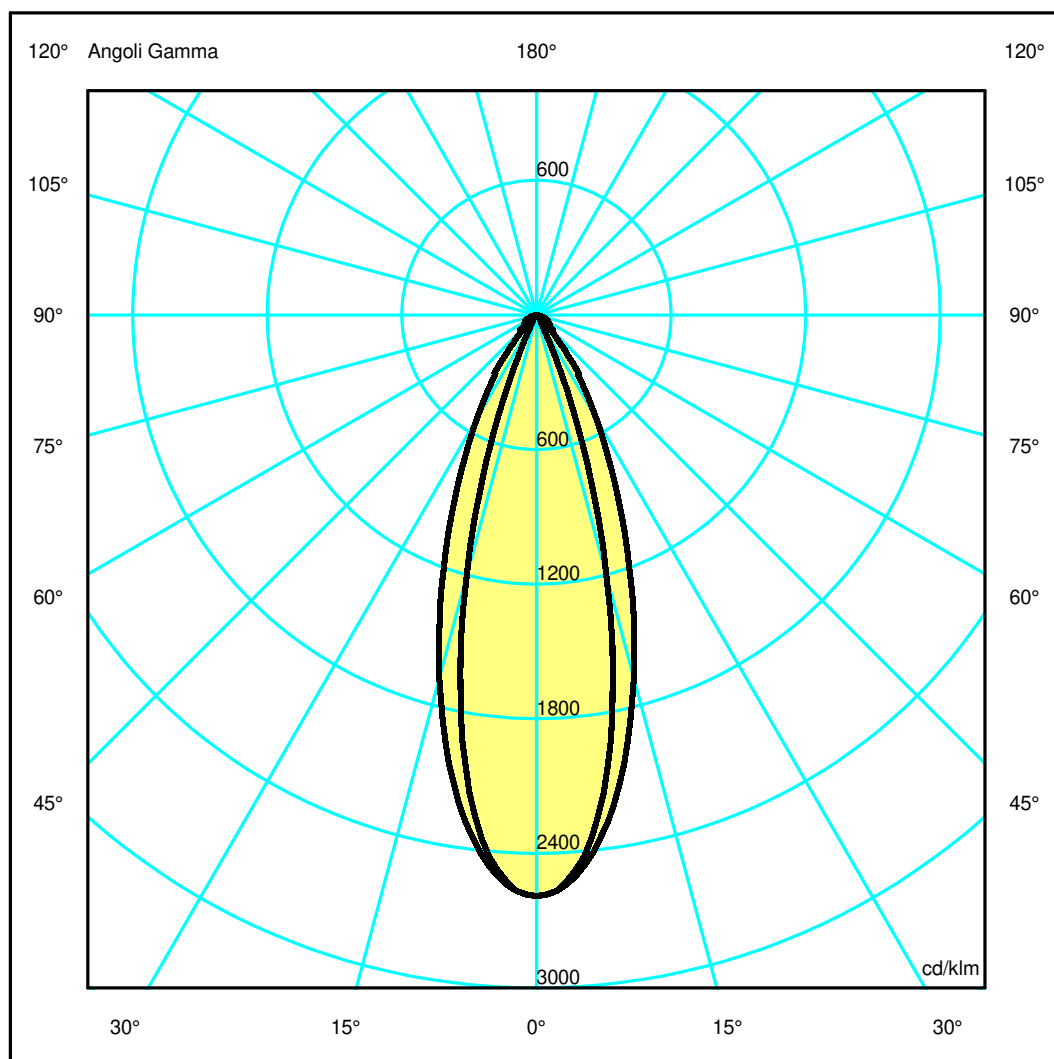

Luminaire

Code BW40204+AP91200

Name VECTOR SPOT 55 CHANNEL 14W 2700K WF BLK + LENS FOR ELLIPTICAL EMISSION

Measurem.

Code FTS2300099


Name VECTOR SPOT 55 CHANNEL 14W 2700K WF BLK + LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	854 lm	Luminaire Power	14.0 W	Efficacy	61.016 lm/W	Efficiency	100.00%
Source Flux	854 lm	Maximum value	2589.45 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	109 mm		
Round Luminous Area		Diam.	51 mm	Height	0 mm		
Horizontal Luminous Area		0.002043 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000494 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		24-02-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		854 lm	
LED Flux=1594lm LED Power=14W Eff=54% EfcLed=114lm/W EfcLum=61lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	93 98 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.51	0.77	1.03	1.28	OC	0.35	0.70	1.04	1.39	1.74
OB	0.26	0.51	0.77	1.03	1.28	OD	0.35	0.70	1.04	1.39	1.74

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2211.96	2070.78	1027.48	125.93	24.21	12.62	6.97	4.47	2.95	0.81
OB	2211.96	2070.78	1027.48	125.93	24.21	12.62	6.97	4.47	2.95	0.81
OC	2211.96	2103.58	1431.83	707.08	272.63	78.26	60.27	39.78	24.25	5.08
OD	2211.96	2103.58	1431.83	707.08	272.63	78.26	60.27	39.78	24.25	5.08

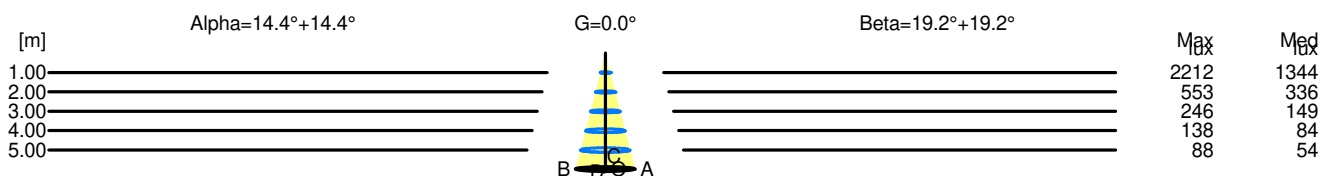

H[m]	D[m]	Max lux	Med lux	Alpha=14.4°+14.4°	G=0.0
1.00	0.51	2212	1344		
2.00	1.03	553	336		
3.00	1.54	246	149		
4.00	2.05	138	84		
5.00	2.57	88	54		

H[m]	D[m]	Max lux	Med lux	Beta=19.2°+19.2°	G=0.0
1.00	0.70	2212	1344		
2.00	1.39	553	336		
3.00	2.09	246	149		
4.00	2.78	138	84		
5.00	3.48	88	54		