


Luminaire

Code M028904
Name 37 CUBE SEMINCASSO LED WIDE 3000K


Measurem.

Code FTS1400873
Name 37 CUBE SEMINCASSO LED WIDE 3000K

Luminaire Flux	468.00 lm	Luminaire Power	8.00 W	Efficacy	58.50 lm/W	Efficiency	100.00%
Lamps Flux	468.00 lm	Maximum value	2627.67 cd/klm	Position	C=0.00 G=0.00	CG Double Symmetrical	
Rectangular Luminaire		Length	37 mm	Width	37 mm	Height	79 mm
Rectangular Luminous Area		Length	37 mm	Width	35 mm	Height	9 mm
Horizontal Luminous Area		0.001295 m2		Emitting area on Plane 180°		0.000370 m2	
Emitting area on Plane 0°		0.000370 m2		Emitting area on Plane 270°		0.000350 m2	
Emitting area on Plane 90°		0.000350 m2		Glare area at 76°		0.000672 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		17-12-2014		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		468.00 lm	
3000K - I _{max} =2600 cd/klm - LED Flux=528 lm - LED Power=7 W - Eff=89 % - EfcLED=75 lm/W - EfcLum=59 lm/W Ra=80 min - SDCM=4 - Life=L70(6K)>50,000 ore							
C.I.E.	90 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		



ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

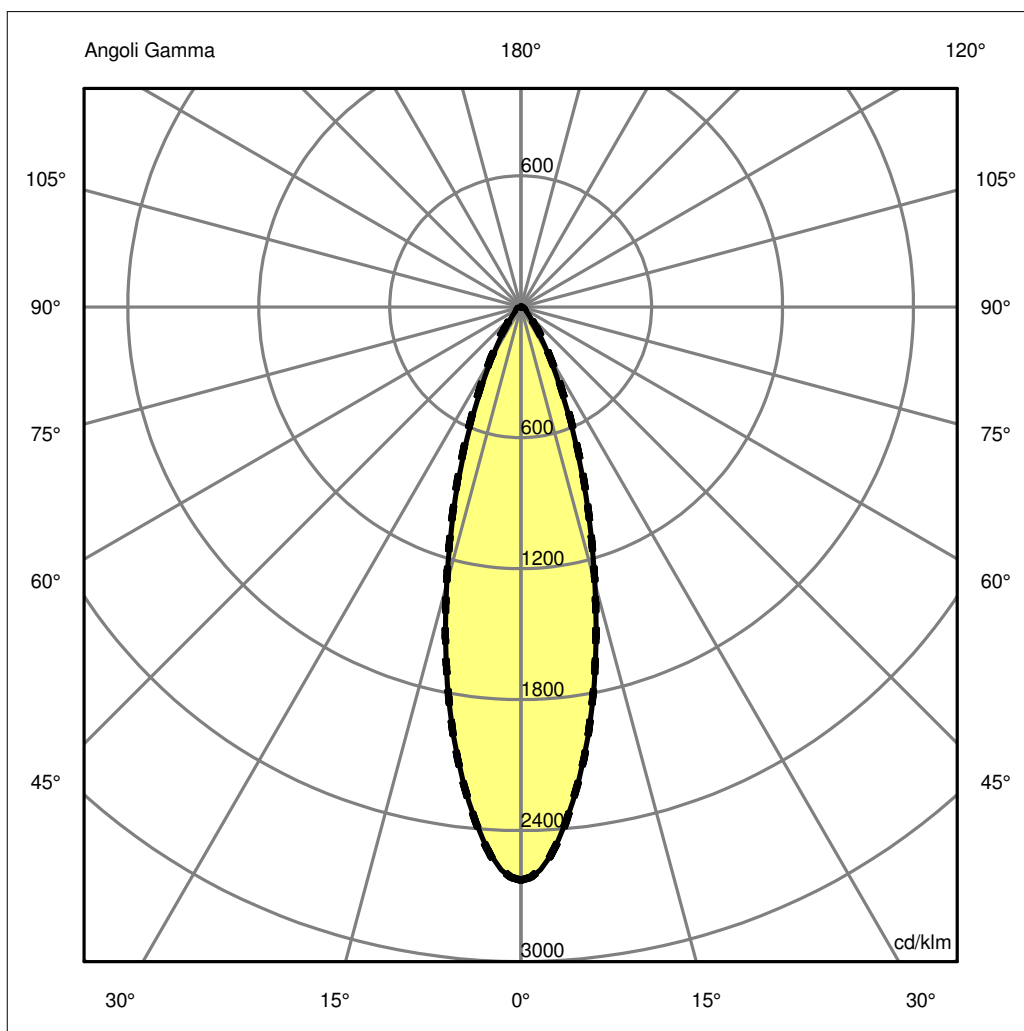

Luminaire

Code M028904
Name 37 CUBE SEMINCASSO LED WIDE 3000K

Measur.


Code FTS1400873
Name 37 CUBE SEMINCASSO LED WIDE 3000K

Luminaire Flux	468.00 lm	Luminaire Power	8.00 W	Efficacy	58.50 lm/W	Efficiency	100.00%
Lamps Flux	468.00 lm	Maximum value	2627.67 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	37 mm	Width	37 mm	Height	79 mm
Rectangular Luminous Area		Length	37 mm	Width	35 mm	Height	9 mm
Horizontal Luminous Area		0.001295 m2		Emitting area on Plane 180°		0.000370 m2	
Emitting area on Plane 0°		0.000370 m2		Emitting area on Plane 270°		0.000350 m2	
Emitting area on Plane 90°		0.000350 m2		Glare area at 76°		0.000672 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		17-12-2014		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		468.00 lm	
3000K - I _{max} =2600 cd/klm - LED Flux=528 lm - LED Power=7 W - Eff=89 % - EfcLED=75 lm/W - EfcLum=59 lm/W Ra=80 min - SDCM=4 - Life=L70(6K)>50,000 ore							
C.I.E.	90 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.54	0.80	1.07	1.34	OC	0.27	0.54	0.80	1.07	1.34
OB	0.27	0.54	0.80	1.07	1.34	OD	0.27	0.54	0.80	1.07	1.34

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1229.75	1108.97	613.71	220.58	63.98	23.65	13.96	11.46	8.75	6.62
OB	1229.75	1108.97	613.71	220.58	63.98	23.65	13.96	11.46	8.75	6.62
OC	1229.75	1109.64	615.39	233.08	70.91	23.39	11.38	7.83	4.59	1.04
OD	1229.75	1109.64	615.39	233.08	70.91	23.39	11.38	7.83	4.59	1.04

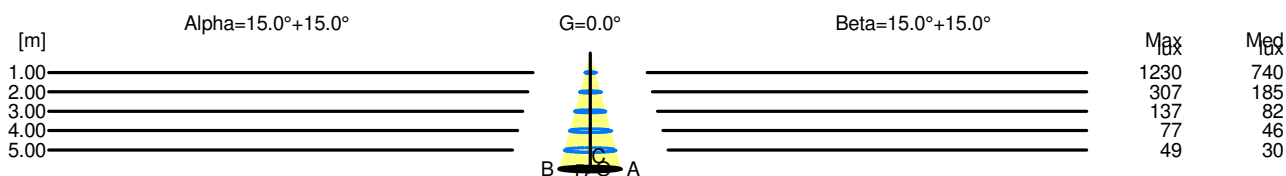

H[m]	D[m]	Max lux	Med lux	Alpha=15.0°+15.0°	G=0.0	
1.00	0.54	1230	740			
2.00	1.07	307	185			
3.00	1.61	137	82			
4.00	2.14	77	46			
5.00	2.68	49	30			

H[m]	D[m]	Max lux	Med lux	Beta=15.0°+15.0°	G=0.0	
1.00	0.54	1230	740			
2.00	1.07	307	185			
3.00	1.61	137	82			
4.00	2.15	77	46			
5.00	2.68	49	30			

Luminaire

Code M028904
Name 37 CUBE SEMINCASSO LED WIDE 3000K

Measurem.

Code FTS1400873
Name 37 CUBE SEMINCASSO LED WIDE 3000K

Luminaire Flux	468.00 lm	Luminaire Power	8.00 W	Efficacy	58.50 lm/W	Efficiency	100.00%
Lamps Flux	468.00 lm	Maximum value	2627.67 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	17.1	17.9	17.4	18.1	17.6	16.4	17.2	16.7	17.4	17.6
x=2H y=3H	18.4	19.1	18.7	19.3	18.3	17.1	17.8	17.4	18.0	18.3
x=2H y=4H	19.1	19.8	19.4	20.0	18.6	17.4	18.1	17.7	18.3	18.6
x=2H y=6H	19.9	20.5	20.3	20.8	18.8	17.7	18.3	18.0	18.6	18.8
x=2H y=8H	20.4	20.9	20.7	21.2	18.9	17.7	18.3	18.1	18.6	18.9
x=2H y=12H	20.8	21.4	21.2	21.7	18.9	17.7	18.3	18.1	18.6	18.9
x=4H y=2H	17.4	18.0	17.7	18.3	18.0	16.8	17.5	17.1	17.7	18.0
x=4H y=3H	18.9	19.5	19.3	19.8	18.9	17.7	18.3	18.1	18.6	18.9
x=4H y=4H	19.8	20.3	20.2	20.6	19.3	18.2	18.6	18.5	19.0	19.3
x=4H y=6H	20.8	21.2	21.2	21.6	19.7	18.5	18.9	18.9	19.3	19.7
x=4H y=8H	21.4	21.7	21.8	22.1	19.8	18.6	19.0	19.0	19.4	19.8
x=4H y=12H	22.0	22.3	22.4	22.7	19.8	18.7	19.0	19.1	19.4	19.8
x=8H y=4H	20.0	20.4	20.4	20.8	19.7	18.5	18.9	19.0	19.3	19.7
x=8H y=6H	21.2	21.5	21.7	21.9	20.2	19.1	19.3	19.5	19.8	20.2
x=8H y=8H	21.9	22.1	22.4	22.6	20.4	19.2	19.5	19.7	19.9	20.4
x=8H y=12H	22.7	22.9	23.1	23.3	20.5	19.3	19.5	19.8	20.0	20.5
x=12H y=4H	20.0	20.3	20.5	20.8	19.8	18.6	19.0	19.1	19.4	19.8
x=12H y=6H	21.3	21.5	21.7	22.0	20.4	19.2	19.5	19.7	19.9	20.4
x=12H y=8H	22.0	22.2	22.5	22.7	20.6	19.5	19.7	20.0	20.1	20.6