




# Ego 55 Flat walk-over stainless EL 3000K Round

Studio Artemide



IP65/67  

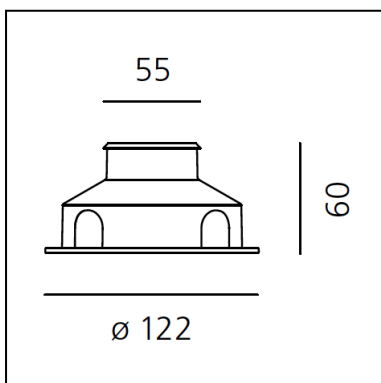

## LUMINAIRE

- Power Supply: **Electronic unintegrated**
- Watt: **1,2W**
- Delivered lumen output: **78lm**
- CCT: **3000K**
- Efficiency: **75%**
- Efficacy: **78.00lm/W**
- CRI: **80**

## Notes

Spot optic Concentrated luminous flow to highlight details avoiding unwanted light dispersion.

## DESCRIPTION

Light fixture with high-performance LED light sources. Recessed floor installation. Walk-over version. Housing depths: Ego WO: 110mm - 120mm, Ego Flat WO: 60mm. Round and square version in five sizes. Consists of body, frame, black silkscreened tempered glass, recessing box. Body in EN AB44100 aluminium, silicone gaskets. Three colour options: with aluminium (only in the 50mm and 90mm size), stainless steel or black silkscreened tempered glass frame, 8mm thick, flush floor-mounting Recessing box for laying in reinforced polymer, can be ordered separately. Ego Flat WO- Feeding cable H05RN-F, with 300cm length for EGO 55 & EGO 90, 20cm for EGO 150, 30cm for EGO 220. Power connection to the mains by means of remote ballast and IP68 electrical terminal board, supplied with the fixture. Fixing to the recessing box is ensured by means of anti-vandal screws TORX, AISI 316. Glass surface temperature lower than 40°C. Fixed or adjustable optics. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K Screws in stainless steel AISI 316. Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Technical features of light fixtures in compliance with EN60598-1 and part 2-13. IP Rating IP65 IP67. Insulation class: Ego WO: class I. Ego Flat WO: class III. Installation must be carried out by specialized personnel. Carefully follow the instructions.

## FEATURES

- Product Code: **T40002ELPTW00**
- Material: **Steel tempered glass, polymer**
- Series: **Architectural Outdoor**
- Area contract: **null, Outdoor**
- design by: **Studio Artemide**

## DIMENSIONS

- Diameter: **55 mm**
- Recessed depth: **60 mm**
- Cutout shape: **Rounded**
- Impact Resistance: **IK10**

## SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **1W**
- Delivered lumen output: **83lm**
- Color temperature (K): **3000K**
- CRI: **80**
- Color Tolerance: **MacAdam 4SDCM**
- Efficacy: **69lm/W**
- Service Life: **L70(10K) > 60500h**

**Accessories**

NO  
IMAGE  
AVAILABLE

CONTROCASSA EGO 55 NL40021H0

NO  
IMAGE  
AVAILABLE

Driver - 14W - 350mA - IP67 - 79x38x25 (LxWxH) -  
Undimmable DV3001

NO  
IMAGE  
AVAILABLE

Driver 38W - 220-240 - 185x35x33 (LxWxH) -  
IP67 - Dimmable DALI DV1042