


A.24 - Suspension Diffused Emission - Linear Module - Direct + Indirect Emission - 2352mm - 4000K - Brushed Bronze

Carlotta de Bevilacqua



IP20   Dimmbar: 

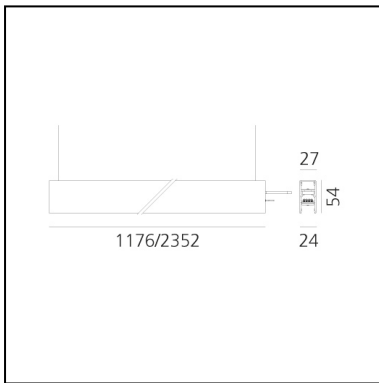

LUMINAIRE

- Watt: **87W**
- Lichtstrom (lm): **8624lm**
- CCT: **4000K**
- Efficiency: **58%**
- Efficacy: **99.13lm/W**
- CRI: **90**

BESCHREIBUNG

A.24 ist ein neues vollständiges und flexibles System, um das Licht im Raum zu zeichnen. Ein einziges Profil von nur 24 mm kann als Einbau-, Decken- oder als Pendelleuchte als nicht-kontinuierliche Lösung installiert werden, auch um den Ecken einer flachen oder dreidimensionalen Fläche zu folgen. In dieses Profil fügen sich verschiedene Performances ein: diffuses Licht, Sharp- Lichtleiter mit drei Öffnungen oder eine intelligente Magnetschiene. A.24 wird dadurch nicht nur zum flexiblen System, sondern zur offenen Plattform, um andere Architectural-Kollektionen unterzubringen. In der Pendelversion können diese Performances durch indirekte Lichtemissionen integriert werden. Die drei Lösungen können sich in Intervallen wiederholen, um mit größter Flexibilität der Architektur und den Funktionen des Ambientes zu folgen. Die Kompetenz von Artemide offenbart sich nicht nur in der Lichtqualität, sondern auch in der Fähigkeit von A.24, sich mit elektrischen Direktverbindungspunkten bis zu 14 Metern frei im Raum zu bewegen.

FUNKTIONEN

- Produktcode: **AQ46320**
- Farbe: **Brushed Bronze**
- Installation: **Pendelleuchte**
- Serie: **Architectural Indoor**
- Anwendungsbereich: **Innenbeleuchtung**
- Lichtverteilung: **Direct**
- design: **Carlotta de Bevilacqua**

DIMENSION

- Länge: **2352 mm**
- Breite: **27 mm**
- Einbautiefe: **54 mm**
- Gewicht: **kg 2,7**

INKLUSIVE LICHTQUELLEN

- Kategorie: **Led**
- Anzahl: **1**
- Color Tolerance: **MacAdam 3SDCM**
- Service Life: **Life L70(17K) 102000h**

Anmerkungen

For curved systems use only flexible opal diffusing screen. Do not mix flexible diffusing screen and opal diffusing screen.

*Uses 3 DALI addresses.

Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories.

1 suspension cable is also included.

End caps have to be ordered separately.

Opal diffusing screen has to be ordered separately.

Depending on the driver, the product can be undimmable or dimmable DALI.

ZUBEHÖR



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Black Cable - APP Compatible AQ16104APP



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - White Cable - APP Compatible AQ17501APP



4pcs feed connectors (for powering multiple sections with a single power kit) AQ90500



0-10, 1-10, Potenziometro, Push, DALI to DALI-Selv Interface DV1061



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Black Cable - APP Compatible AQ17504APP



Power cable, 2x0.75 + 2x0.35, mm2 (to create customized power cable) - 10m - White AQ90600



Power cable, 2x0.75 + 2x0.35, mm2 (to create customized power cable) - 50m - White AQ90700



Power cable, 2x0.75 + 2x0.35, mm2 (to create customized power cable) - 10m - Black AQ90800



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - Black - Black Cable - DALI AQ15404



Power cable, 2x0.75 + 2x0.35, mm2 (to create customized power cable) - 50m - Black AQ90900



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - White Cable - DALI AQ16101



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Black Cable - DALI AQ16104



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - DALI AQ16000



240W Remote box power supply kit (2 connectors) - 230VAC-48VDC - IP20 - 313x243x57,5H - APP Compatible AQ16000APP



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - White - White Cable - APP Compatible AQ15401APP



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - Black - Black Cable - APP Compatible AQ15404APP



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - White Cable - APP Compatible AQ16101APP



A.24 - Opal Diffusing Screen - 10m AQ16200



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - White - White Cable - DALI AQ15401



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100



A.24 - Opal Diffusing Screen - 25m AQ16300



A.24 - Opal Diffusing Screen - 50m AQ16400



A.24 - Opal Diffusing Screen - 2352mm AQ16600



A.24 - Opal Diffusing Screen - 3528mm AQ16700



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 351X61x111H - Black - Black Cable - Undimmable AQ17104



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 351X61x111H - White - White Cable - Undimmable AQ17601



A.24 - Suspension - End caps. (2pcs) including 1 suspension cable 200H - Brushed Bronze AQ45120



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 351X61x111H - Black - Black Cable - Undimmable AQ17604



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - White - White Cable - DALI AQ17501



150W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 321x91x111H - Black - Black Cable - DALI AQ17504



Auxiliary suspension cable (to be used for S-configuration) (1 pcs) AQ49500



A.24 - Suspension - Transition joint - Use between different typology modules (track-diffusing-sharping) - Brushed Bronze AQ49420



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - White - White Cable - Undimmable AQ17401



240W Recessed power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 396x195x112H - Black - Black Cable - Undimmable AQ17404



240W Ceiling power supply kit (cable length 2,2 m) - 230VAC-48VDC - IP20 - 351X61x111H - White - White Cable - Undimmable AQ17101



A.24 - Suspension - Insulating Spacer - Use between modules powered by different power supplies (1pcs) - Brushed Bronze AQ45220