



Alphabet of light system - Wall/Ceiling - Curved - 60° - 3500K - Terminal Left - Powered

BIG - Bjarke Ingels Group

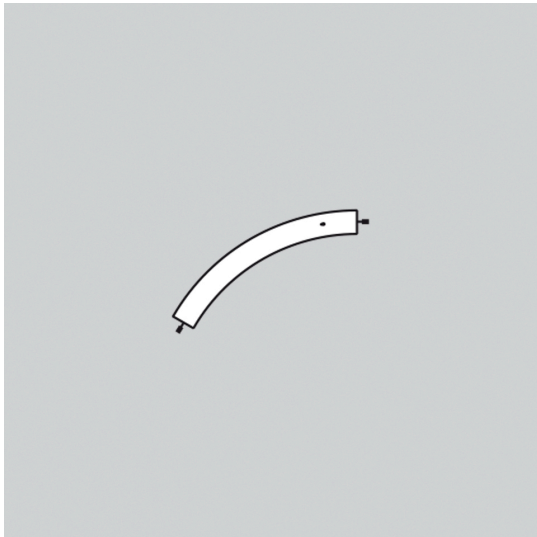

IP20    Dimmerable: 

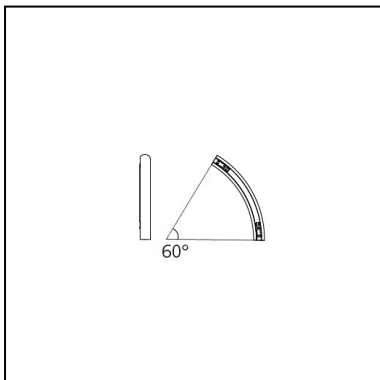

LUMINAIRE

- Watt: **8W**
- Delivered lumen output: **815lm**
- CCT: **3500K**
- Efficiency: **76%**
- Efficacy: **101.87lm/W**
- CRI: **90**
- Dimmable Typology: **APP,Push/DALI**

Notes

Max 10 m for each power unit (10 m in one direction or 5 m in both directions). Ceiling rose with power supply for each group. (depending on the power supply chosen, the product could be APP Compatible). DALI dimming possible for the entire system or for groups of modules powered by the same driver.

DESCRIPTION

The Alphabet of Light system is a language of light that continues to grow with new curved elements, developing with increasing freedom in spaces. It is a fundamental principle that generates an open system through a few basic modules. Thanks to precise geometric proportions, these modules can be combined to construct infinite structures of light, whether essential or more complex, linear or curvilinear, all environmentally certifiable with EPD (Environmental Product Declaration).

The concept by BIG combines with Artemide's optoelectronic expertise to define an innovative construction principle and provide a continuous and comfortable light. It is a minimal presence that encompasses not only highly innovative optoelectronic and patented mechanical components but also management innovations. The system is controllable through the Artemide App to create freedom not only in designing geometries but also in defining dynamic performances, programmable or modifiable in real time.

FEATURES

- Product Code: **2148C10AHE**
- Colour: **White**
- Installation: **Ceiling, Wall**
- Material: **Aluminum support, frosted technopolymer diffuser element.**
- Series: **Design Collection, Architectural Indoor**
- Environment: **Indoor**
- design by: **BIG - Bjarke Ingels Group**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- CRI: **90**
- Color Tolerance: **MacAdam 3SDCM**
- Service Life: **L70 (10K) 60000h**

Accessories

Legend

→ left to right path

← right to left path



Joint N°7 (→ L to R) 60° curve right - 60° curve right (← R to L) 60° curve left - 60° curve left (→ L to R) 60° curve left - 60° curve left (← R to L) 60° curve right - 60° curve right 2256010A



Joint N°8 (→ L to R) 60° curve right - 45° curve left (← R to L) 45° curve right - 60° curve left 2257010A



Joint N°16 (→ L to R) 60° curve left - 45° curve right (← R to L) 45° curve left - 60° curve right 2258010A



Joint N°10 (→ L to R) 60° curve right - 60° curve left (← R to L) 60° curve right - 60° curve left 2259010A



Joint N°11 (→ L to R) 60° curve right - 45° curve right (← R to L) 45° curve left - 60° curve left 2261010A



Joint N°12 (→ L to R) 60° curve left - 45° curve left (← R to L) 45° curve right - 60° curve right 2262010A



Joint N°28 (→ L to R) 22° curve left - 60° curve left (← R to L) 60° curve left - 22° curve left 2621010A



Joint N°6 (→ L to R) Linear - curve 60° left (← R to L) 60° curve right - linear 2254010A



Joint N°23 (→ L to R) 22° curve right - 60° curve right (← R to L) 60° curve left - 22° curve left 2616010A



Joint N°24 (→ L to R) 22° curve right - 60° curve left (← R to L) 60° curve left - 22° curve right 2617010A



Joint N°27 (→ L to R) 22° curve left - 60° curve right (← R to L) 60° curve right - 22° curve left 2620010A



Dali / Push ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44) - No output cable 2268010A



APP ceiling power unit (175W, 220-240VAC, L=306, W=140, H=44) - No output cable 2268010APP