


Luminaire


Code T082010
 Name CHILONE PALO 16W 3000K ruggine
Measur.
 Code FDS0000906
 Name CHILONE PALO 16W 3000K ruggine

Efficiency	100.00%	Coordinate system	CG	Total Flux	310.00 lm
Maximum value	610.94 cd/klm	Position	C=80.00 G=50.00	Asymmetrical	
Rectangular Luminaire Rectangular Luminous Area	Length 50 mm Length 50 mm	Width 170 mm Width 170 mm	Height 360 mm Height 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.008500 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.002056 m2		
Date Measurement Distance	16-12-2013 0.00	Maximum Gamma Angle Measurement Flux	180 310.00 lm		
Imax=607 cd/Klm - LED Flux=660 lm - LED Power=14.0 W - Eff=47 % - EfcLED=47 lm/W - EfcLum=19 lm/W Ra=80 Typ - SDCM=7 - Life=L70(10K)>35500 ore					
C.I.E. F UTE	24 61 87 93 100 0.93 I + 0.07 T	D DIN 5040 B NBN	A11 BZ 8 / 0.8 / BZ 7 / 2 / BZ 6		

50mm x 170mm



ULOR 6.64 %
 DLOR 93.36 %
 RN 6.64 %

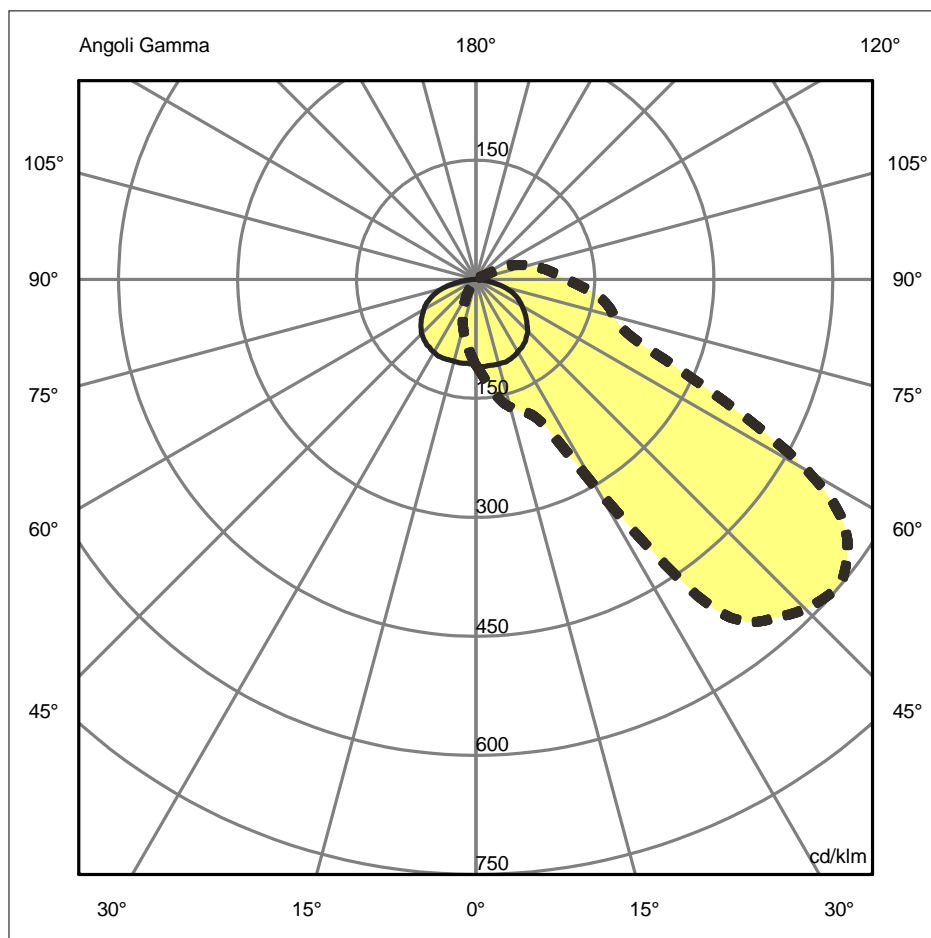

Luminaire

Code T082010
 Name CHILONE PALO 16W 3000K ruggine

Measur.

Code FDS0000906
 Name CHILONE PALO 16W 3000K ruggine

Efficiency	100.00%	Coordinate system	CG	Total Flux	310.00 lm	
Maximum value	610.94 cd/klm	Position	C=80.00 G=50.00	Asymmetrical		
Rectangular Luminaire	Length	50 mm	Width	170 mm	Height	360 mm
Rectangular Luminous Area	Length	50 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area	0.008500 m2	Emitting area on Plane 180°	0.000000 m2			
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2			
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.002056 m2			
Date	16-12-2013	Maximum Gamma Angle	180			
Measurement Distance	0.00	Measurement Flux	310.00 lm			
Imax=607 cd/Klm - LED Flux=660 lm - LED Power=14.0 W - Eff=47 % - EfcLED=47 lm/W - EfcLum=19 lm/W Ra=80 Typ - SDCM=7 - Life=L70(10K)>35500 ore						
C.I.E.	24 61 87 93 100	D DIN 5040	A11			
F UTE	0.93 I + 0.07 T	B NBN	BZ 8 / 0.8 / BZ 7 / 2 / BZ 6			

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0