

Luminaire

Code BH20505+BH16001
 Name A.39 RCS TRIM SHARP 1184 LB XF 940 SLV + 2X4 OPT. LB WHITE

Measurement

Code FTS1900693
 Name A.39 RCS TRIM SHARP 1184 LB XF 940 SLV + 2X4 OPT. LB WHITE

Luminaire Flux	1709.33 lm	Luminaire Power	22.00 W	Efficacy	77.70 lm/W	Efficiency	100.00%
Sources Flux	1709.33 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	1184 mm	Width	40 mm	Height	111 mm	
Rectangular Luminous Area	Length	296 mm	Width	37 mm	Height	0 mm	
Horizontal Luminous Area	0.010952 m ²	Emitting area on Plane 180°	0.000000 m ²	Emitting area on Plane 270°	0.000000 m ²	Emitting area on Plane 90°	0.002650 m ²
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Maximum Gamma Angle	180	Measurement Distance	1709.33 lm
Date	17-07-2017	Measurement Flux	1709.33 lm				
Measurement Distance	0.00						
LED Flux=2329,1lm LED Power=22W Eff=73% EfcLed=106lm/W EfcLum=78lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				


1184mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

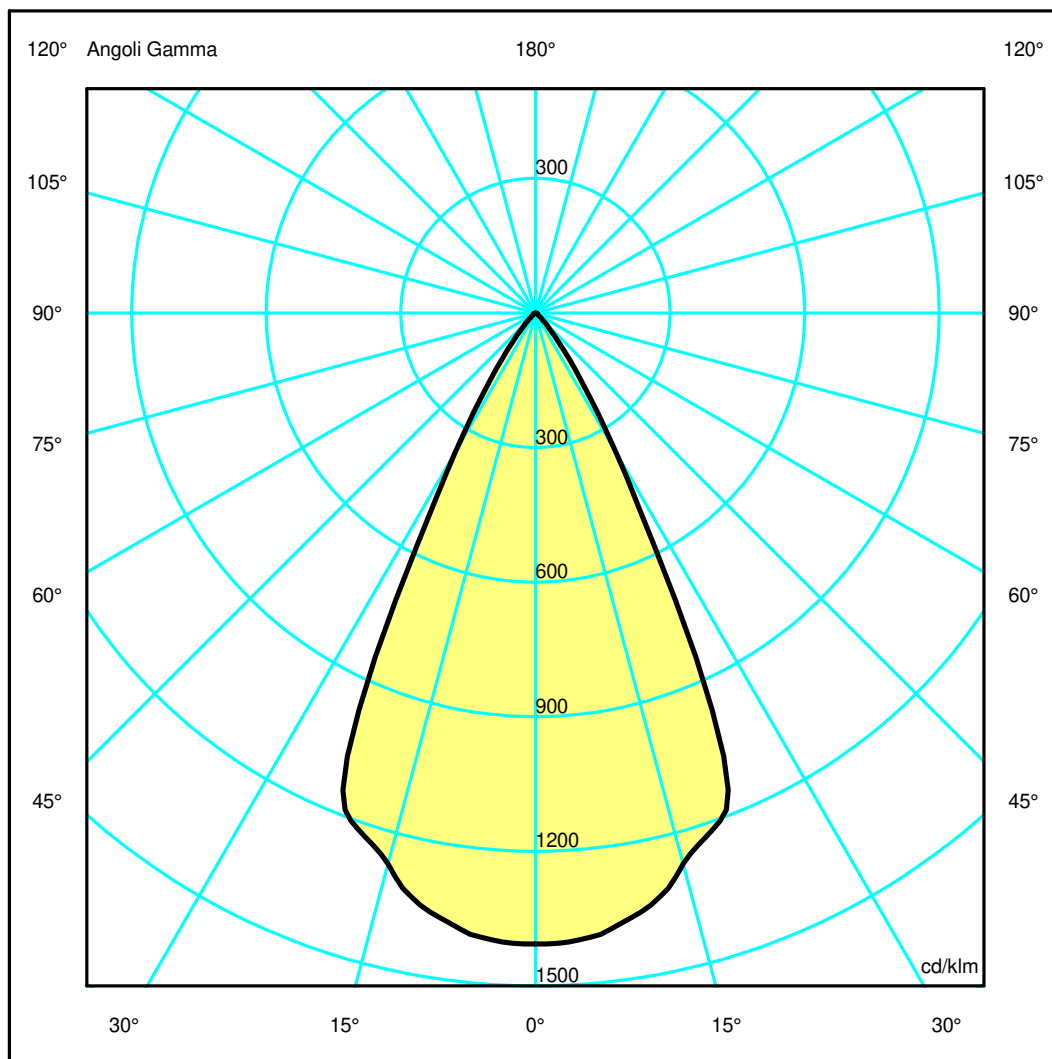

Luminaire

Code BH20505+BH16001
Name A.39 RCS TRIM SHARP 1184 LB XF 940 SLV + 2X4 OPT. LB WHITE

Measurerm.

Code FTS1900693
Name A.39 RCS TRIM SHARP 1184 LB XF 940 SLV + 2X4 OPT. LB WHITE

Luminaire Flux	1709.33 lm	Luminaire Power	22.00 W	Efficacy	77.70 lm/W	Efficiency	100.00%
Sources Flux	1709.33 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	1184 mm	Width	40 mm	Height	111 mm	
Rectangular Luminous Area	Length	296 mm	Width	37 mm	Height	0 mm	
Horizontal Luminous Area	0.010952 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.002650 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	17-07-2017	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	1709.33 lm				


LED Flux=2329,1lm LED Power=22W Eff=73% EfcLed=106lm/W EfcLum=78lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E.	97 99 100 100 100	D DIN 5040	A60
F UTE	--	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.45	OC	0.49	0.98	1.47	1.96	2.45
OB	0.49	0.98	1.47	1.96	2.45	OD	0.49	0.98	1.47	1.96	2.45

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2403.90	2386.75	2172.59	1446.30	265.03	46.07	10.79	6.90	4.53	1.69
OB	2403.90	2386.75	2172.59	1446.30	265.03	46.07	10.79	6.90	4.53	1.69
OC	2403.90	2386.75	2172.59	1446.30	265.03	46.07	10.79	6.90	4.53	1.69
OD	2403.90	2386.75	2172.59	1446.30	265.03	46.07	10.79	6.90	4.53	1.69

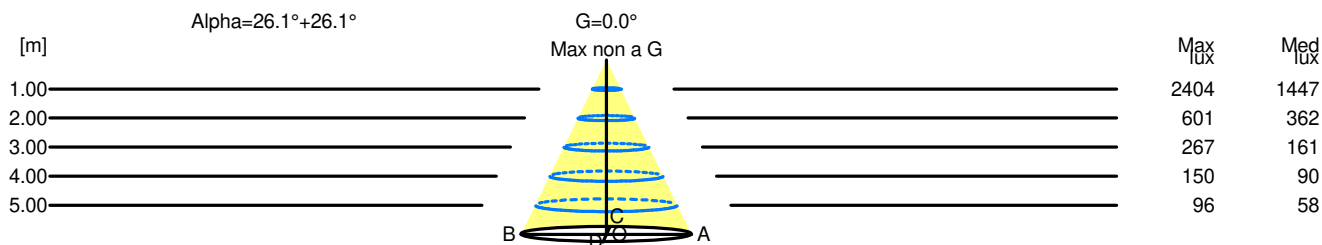

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0 Max non a G
1.00	0.98	2404	1447		
2.00	1.96	601	362		
3.00	2.94	267	161		
4.00	3.91	150	90		
5.00	4.89	96	58		