

## Luminaire

Code BH10401+BH16304  
 Name A.39 SHARP D+IND 2368 HB 34 300K ND BCO + COVER 6X4 OPT. HB BLACK

## Measurem.

Code FTS1900259  
 Name A.39 SHARP D+IND 2368 HB 34 300K ND BCO + COVER 6X4 OPT. HB BLACK


Luminaire Flux	10482.58 lm	Luminaire Power	125.00 W	Efficacy	83.86 lm/W	Efficiency	100.00%
Sources Flux	10482.58 lm	Maximum value	1147.06 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.007949 m2		
Coordinate system		CG			Symmetry Type	Double Symmetrical	
Date		16-02-2017			Maximum Gamma Angle	180	
Measurement Distance		0.00			Measurement Flux	10482.58 lm	

LED Flux=13475,65lm LED Power=103W Eff=78% EfcLed=131lm/W EfcLum=84lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 99 100 100 44 100  
 F UTE --

D DIN 5040  
 B NBN  
 C62  
 BZ 1

2368mm x 40mm




Semipiani C

180.0 — 0.0  
 270.0 — 90.0

ULOR 56.40 %

DLOR 43.60 %

RN 56.40 %

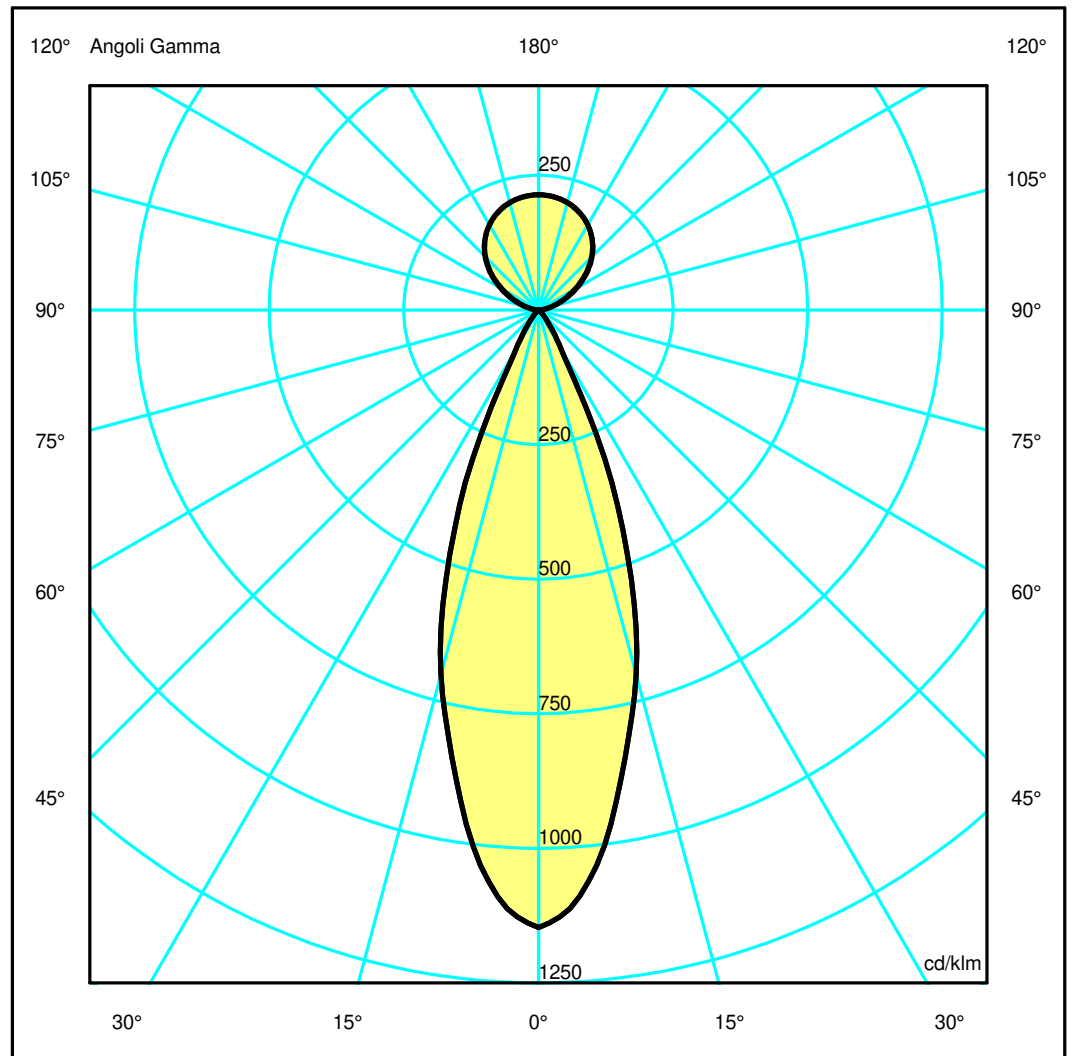

## Luminaire

Code BH10401+BH16304  
 Name A.39 SHARP D+IND 2368 HB 34 300K ND BCO + COVER 6X4 OPT. HB BLACK

## Measurement

Code FTS1900259  
 Name A.39 SHARP D+IND 2368 HB 34 300K ND BCO + COVER 6X4 OPT. HB BLACK

Luminaire Flux	10482.58 lm	Luminaire Power	125.00 W	Efficacy	83.86 lm/W	Efficiency	100.00%
Sources Flux	10482.58 lm	Maximum value	1147.06 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007949 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		10482.58 lm	


LED Flux=13475,65lm LED Power=103W Eff=78% EfcLed=131lm/W EfcLum=84lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E.	99 100 100 44 100	D DIN 5040	C62
F UTE	--	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.65	0.98	1.30	1.63	OC	0.33	0.65	0.98	1.30	1.63
OB	0.33	0.65	0.98	1.30	1.63	OD	0.33	0.65	0.98	1.30	1.63

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	12024.19	11169.89	7344.93	2618.45	445.17	89.68	10.54	1.46	0.00	0.00
OB	12024.19	11169.89	7344.93	2618.45	445.17	89.68	10.54	1.46	0.00	0.00
OC	12024.19	11169.89	7344.93	2618.45	445.17	89.68	10.54	1.46	0.00	0.00
OD	12024.19	11169.89	7344.93	2618.45	445.17	89.68	10.54	1.46	0.00	0.00

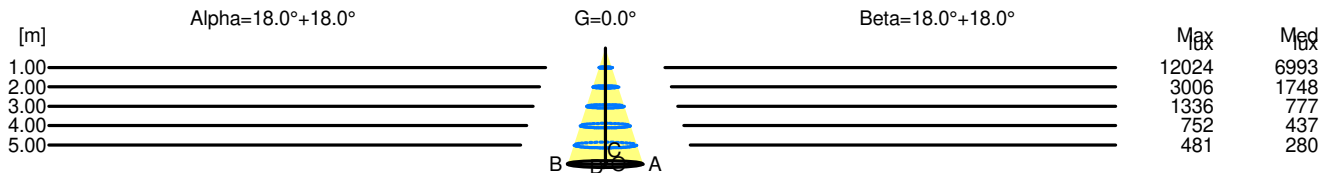

H[m]	D[m]	Max lux	Med lux	Alpha=18.0°+18.0°	G=0.0
1.00	0.65	12024	6993		
2.00	1.30	3006	1748		
3.00	1.95	1336	777		
4.00	2.60	752	437		
5.00	3.25	481	280		

H[m]	D[m]	Max lux	Med lux	Beta=18.0°+18.0°	G=0.0
1.00	0.65	12024	6993		
2.00	1.30	3006	1748		
3.00	1.95	1336	777		
4.00	2.60	752	437		
5.00	3.25	481	280		