

## Luminaire

Code 2107C10A  
Name AoL SYSTEM S LIN.120 SLAVE INTERM 3500K

## Measurement

Code FTS1902585  
Name AoL SYSTEM S LIN.120 SLAVE INTERM 3500K

Luminaire Flux	1984.67 lm	Luminaire Power	21.00 W	Efficacy	94.51 lm/W	Efficiency	100.00%
Sources Flux	1984.67 lm	Maximum value	156.12 cd/klm	Position	C=5.00 G=5.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1200 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1200 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.060000 m <sup>2</sup>		Emitting area on Plane 180°		0.060000 m <sup>2</sup>	
Emitting area on Plane 0°		0.060000 m <sup>2</sup>		Emitting area on Plane 270°		0.002500 m <sup>2</sup>	
Emitting area on Plane 90°		0.002500 m <sup>2</sup>		Glare area at 76°		0.072733 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		05-09-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1984.67 lm	


LED Flux=2488lm LED Power=21W Eff=80% EfcLed=118lm/W EfcLum=95lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 33 60 82 69 100  
F UTE 0.69 H + 0.31 T

D DIN 5040  
B NBN

B21  
BZ 6

1200mm x 50mm




Sempiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 31.35 %

DLOR 68.65 %

RN 31.35 %

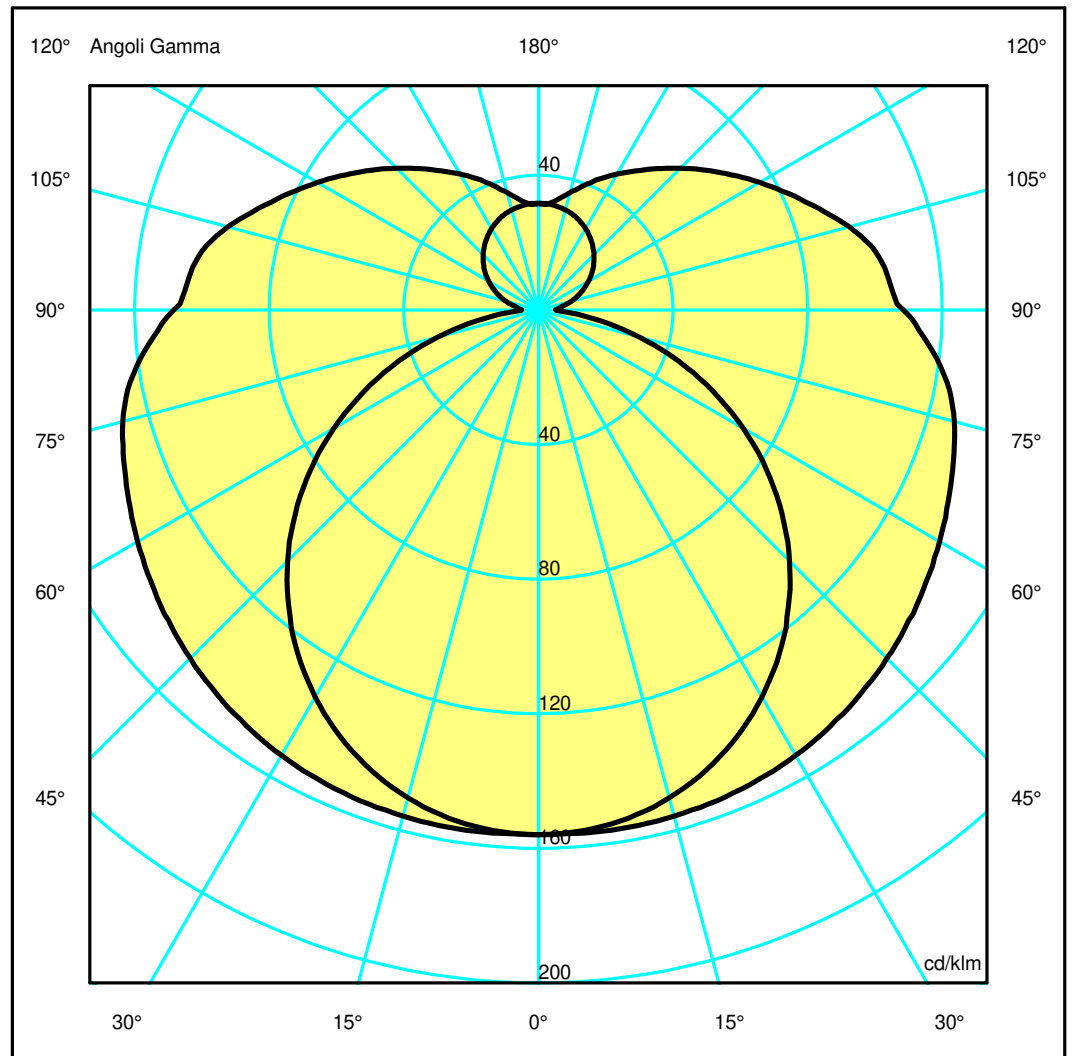

**Luminaire**

Code 2107C10A  
 Name AoL SYSTEM S LIN.120 SLAVE INTERM 3500K

**Measurem.**

Code FTS1902585  
 Name AoL SYSTEM S LIN.120 SLAVE INTERM 3500K

Luminaire Flux	1984.67 lm	Luminaire Power	21.00 W	Efficacy	94.51 lm/W	Efficiency	100.00%
Sources Flux	1984.67 lm	Maximum value	156.12 cd/klm	Position	C=5.00 G=5.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1200 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1200 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.060000 m2		Emitting area on Plane 180°		0.060000 m2	
Emitting area on Plane 0°		0.060000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.072733 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		05-09-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1984.67 lm	
LED Flux=2488lm LED Power=21W Eff=80% EfcLed=118lm/W EfcLum=95lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 82 69 100			D DIN 5040	B21		
F UTE	0.69 H + 0.31 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8