

Luminaire

Code 2161010A
Name AoL SYSTEM SR LIN.120 MAST.TERM 3000K

Measurement

Code FTS1902531
Name AoL SYSTEM SR LIN.120 MAST.TERM 3000K

Luminaire Flux	1954.36 lm	Luminaire Power	21.00 W	Efficacy	93.06 lm/W	Efficiency	100.00%
Sources Flux	1954.36 lm	Maximum value	156.12 cd/klm	Position	C=5.00 G=5.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1200 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1200 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.060000 m2		Emitting area on Plane 180°		0.060000 m2	
Emitting area on Plane 0°		0.060000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.072733 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		05-09-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1954.36 lm	


LED Flux=2450lm LED Power=21W Eff=80% EfcLed=117lm/W EfcLum=93lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 33 60 82 69 100
F UTE 0.69 H + 0.31 T

D DIN 5040
B NBN

B21
BZ 6


1200mm x 50mm



Sempiani C

180.0 — 0.0
270.0 — 90.0

ULOR 31.35 %
DLOR 68.65 %
RN 31.35 %

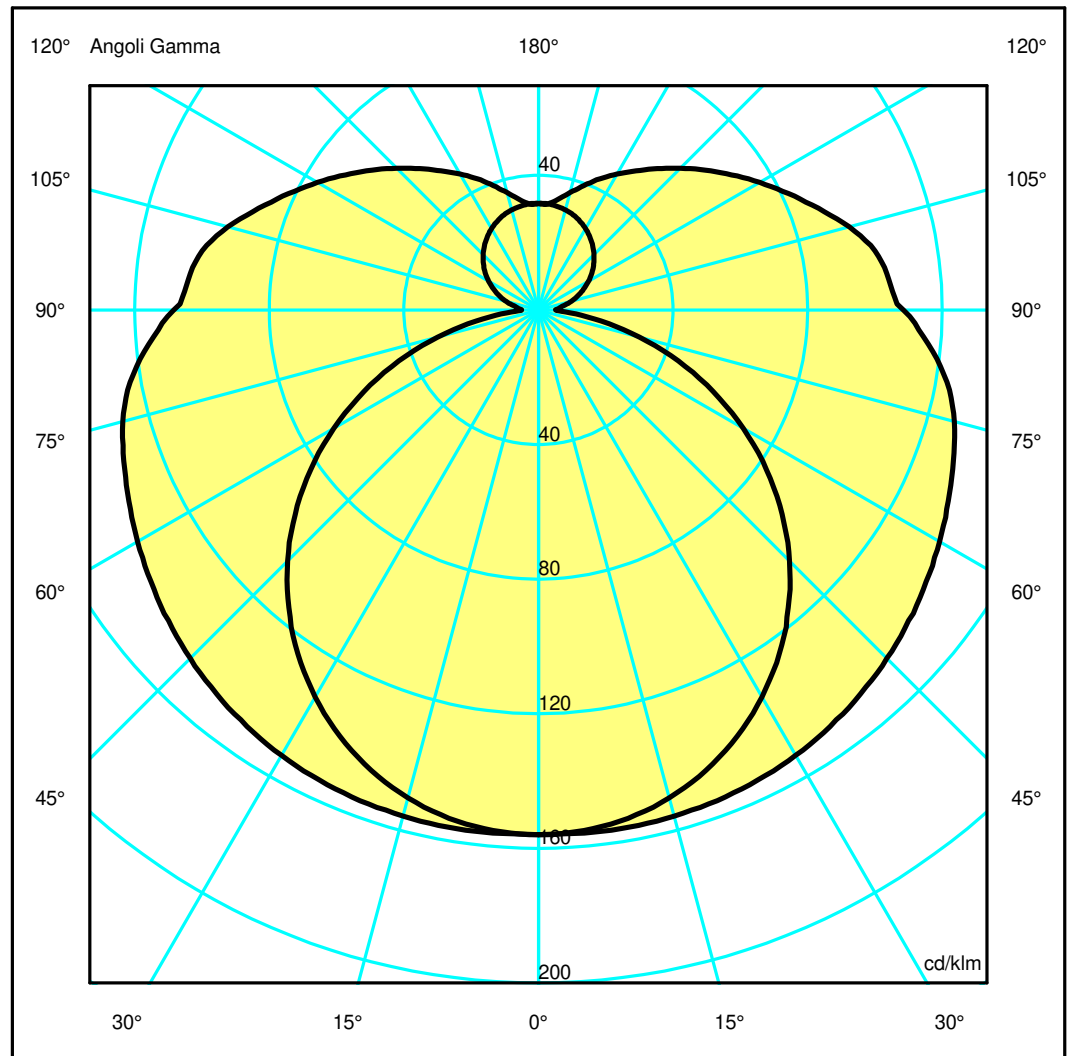

Luminaire

Code 2161010A
 Name AoL SYSTEM SR LIN.120 MAST.TERM 3000K

Measurem.

Code FTS1902531
 Name AoL SYSTEM SR LIN.120 MAST.TERM 3000K

Luminaire Flux	1954.36 lm	Luminaire Power	21.00 W	Efficacy	93.06 lm/W	Efficiency	100.00%
Sources Flux	1954.36 lm	Maximum value	156.12 cd/klm	Position	C=5.00 G=5.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1200 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	1200 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.060000 m2		Emitting area on Plane 180°		0.060000 m2	
Emitting area on Plane 0°		0.060000 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.072733 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		05-09-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1954.36 lm	
LED Flux=2450lm LED Power=21W Eff=80% EfcLed=117lm/W EfcLum=93lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 60 82 69 100			D DIN 5040	B21		
F UTE	0.69 H + 0.31 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8