

Luminaire

Code 2115C10A
Name AoL SYSTEM S 45° SLAVE TERM. SX 3500K

Measurement

Code FTS1902605
Name AoL SYSTEM S 45° SLAVE TERM. SX 3500K

Luminaire Flux	979.28 lm	Luminaire Power	11.00 W	Efficacy	89.03 lm/W	Efficiency	100.00%
Sources Flux	979.28 lm	Maximum value	160.44 cd/klm	Position	C=0.00 G=8.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	590 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	590 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area	0.029500 m ²			Emitting area on Plane 180°		0.029500 m ²	
Emitting area on Plane 0°	0.029500 m ²			Emitting area on Plane 270°		0.002500 m ²	
Emitting area on Plane 90°	0.002500 m ²			Glare area at 76°		0.035760 m ²	
Coordinate system	CG			Symmetry Type		Sym. on planes 0-180	
Date	16-05-2019			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		979.28 lm	


LED Flux=1244lm LED Power=11W Eff=79% EfcLed=113lm/W EfcLum=89lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 33 61 83 70 100
F UTE 0.70 H + 0.30 T

D DIN 5040
B NBN

B21
BZ 6

590mm x 50mm




Sempiani C

180.0 — 0.0
270.0 — 90.0

ULOR 30.46 %

DLOR 69.54 %

RN 30.46 %

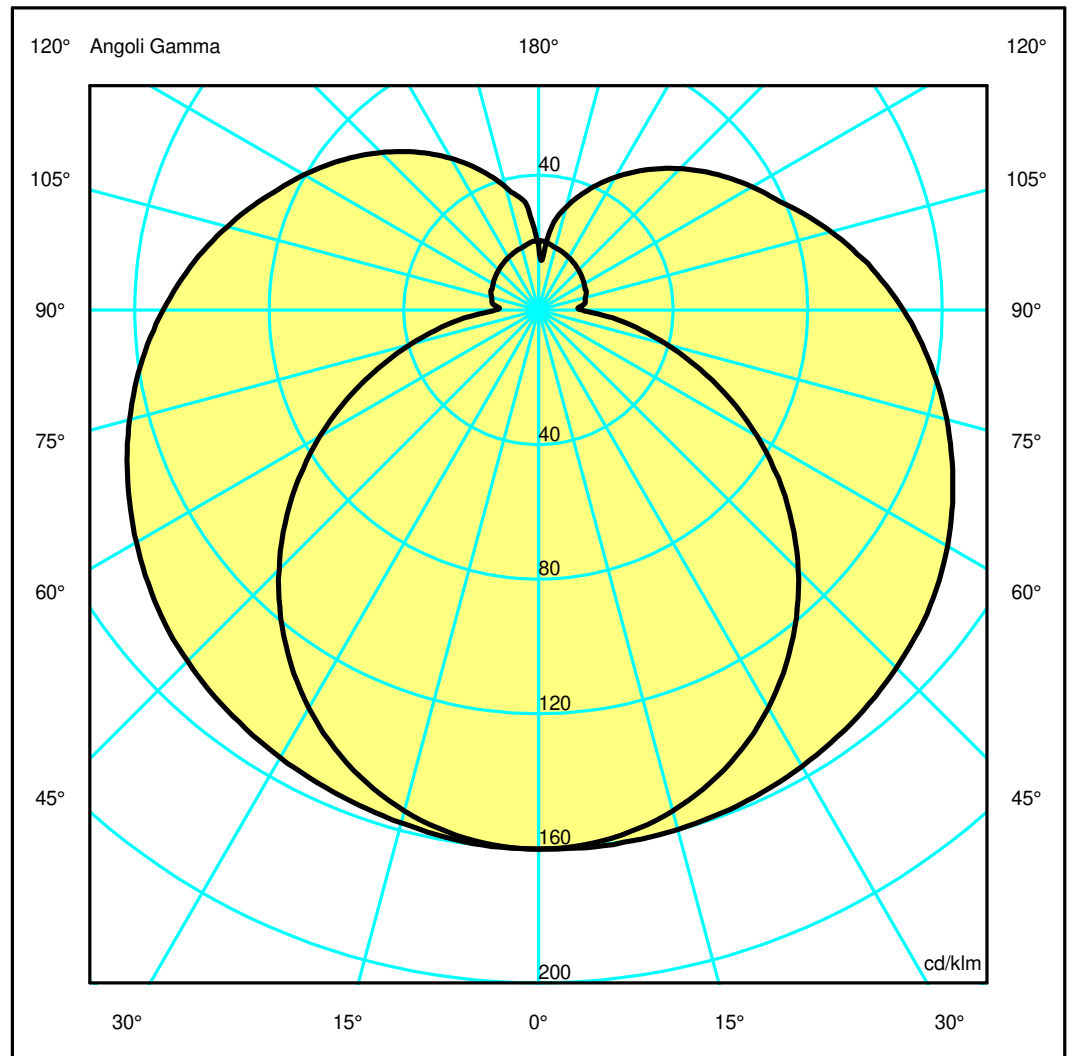

Luminaire

Code 2115C10A
 Name AoL SYSTEM S 45° SLAVE TERM. SX 3500K

Measurem.

Code FTS1902605
 Name AoL SYSTEM S 45° SLAVE TERM. SX 3500K

Luminaire Flux	979.28 lm	Luminaire Power	11.00 W	Efficacy	89.03 lm/W	Efficiency	100.00%
Sources Flux	979.28 lm	Maximum value	160.44 cd/klm	Position	C=0.00 G=8.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	590 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area		Length	590 mm	Width	50 mm	Height	50 mm
Horizontal Luminous Area		0.029500 m2		Emitting area on Plane 180°		0.029500 m2	
Emitting area on Plane 0°		0.029500 m2		Emitting area on Plane 270°		0.002500 m2	
Emitting area on Plane 90°		0.002500 m2		Glare area at 76°		0.035760 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		16-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		979.28 lm	
LED Flux=1244lm LED Power=11W Eff=79% EfcLed=113lm/W EfcLum=89lm/W CCT=3500K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	33 61 83 70 100			D DIN 5040	B21		
F UTE	0.70 H + 0.30 T			B NBN	BZ 6		

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8

Apertura a destra non trovata, gamma =8