

Luminaire

Code M0569W83+M109800+M282100


Name CATA TIR BINARIO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + GRIGLIA FRANGILUCE

Measurerm.

Code FTS1503426

Name CATA TIR BINARIO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + GRIGLIA FRANGILUCE

Luminaire Flux	1028.47 lm	Luminaire Power	22.00 W	Efficacy	46.75 lm/W	Efficiency	100.00%
Lamps Flux	1028.47 lm	Maximum value	1457.57 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 130 mm Diam. 75 mm	Height	176 mm	Height	50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.003750 m2 0.003750 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.003750 m2 0.003750 m2 0.004707 m2		
Coordinate system	CG	Symmetry Type					Rotosymmetrical
Date	07-10-2015	Maximum Gamma Angle					180
Measurement Distance	0.00	Measurement Flux					1028.47 lm
LED Flux=1811,5lm LED Power=17,5W Eff=57% EfcLed=104lm/W EfcLum=47lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	91 98 99 100 100	D DIN 5040		A60			
F UTE	1.00 A	B NBN		BZ 1			

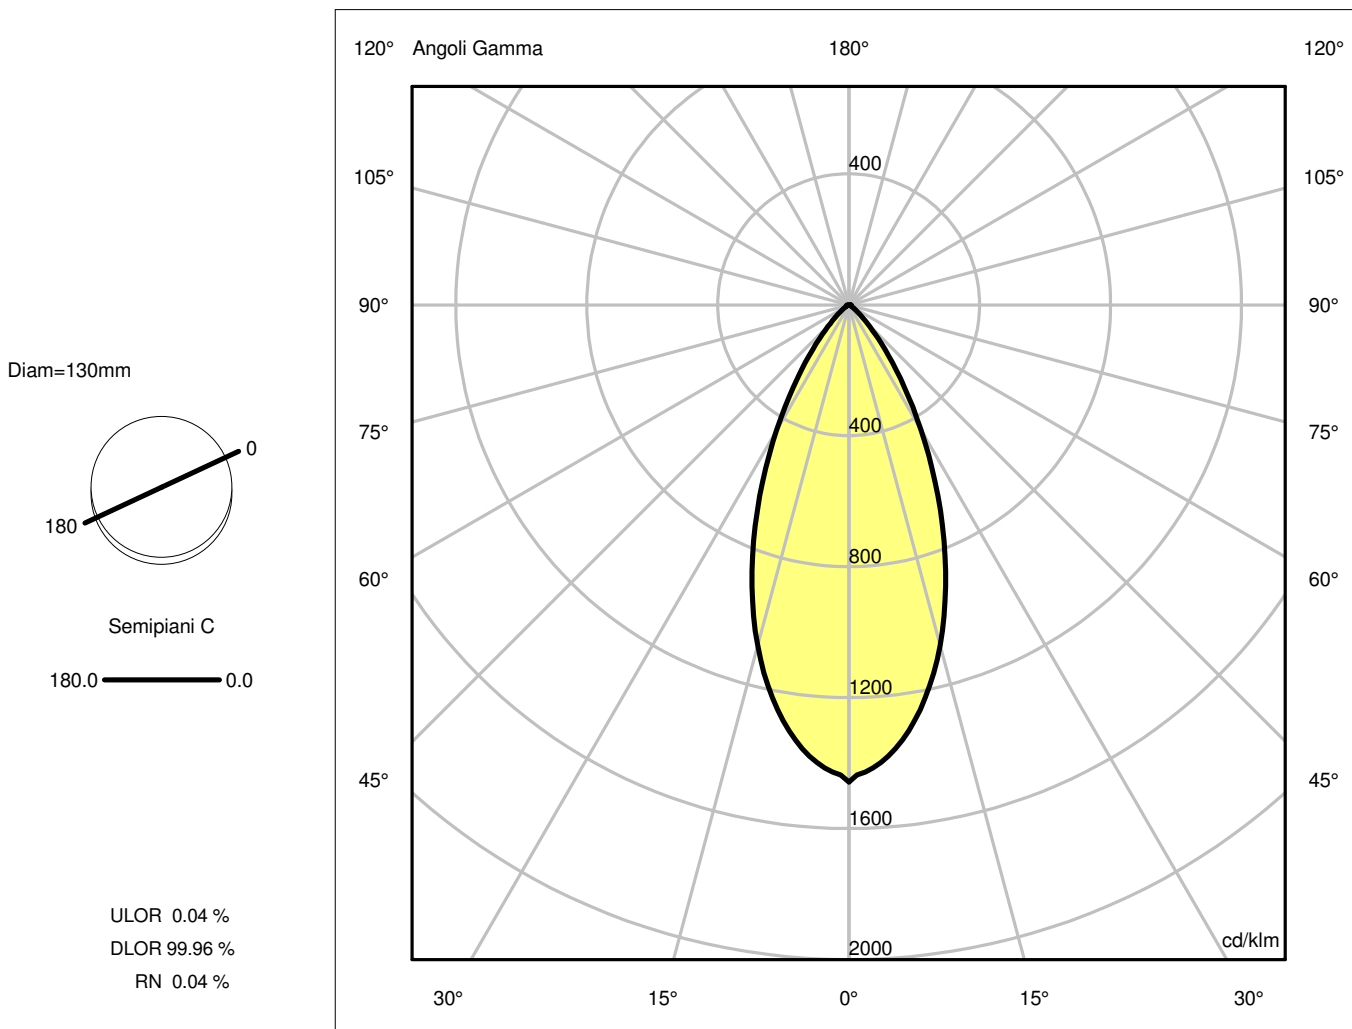

Luminaire

Code M0569W83+M109800+M282100

Name CATA TIR BINARIO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + GRIGLIA FRANGILUCE

Measurement

Code FTS1503426

Name CATA TIR BINARIO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA WIDE FLOOD + GRIGLIA FRANGILUCE


Luminaire Flux	1028.47 lm	Luminaire Power	22.00 W	Efficacy	46.75 lm/W	Efficiency	100.00%
Lamps Flux	1028.47 lm	Maximum value	1457.57 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.003750 m2		
Emitting area on Plane 0°	0.003750 m2			Emitting area on Plane 270°	0.003750 m2		
Emitting area on Plane 90°	0.003750 m2			Glare area at 76°	0.004707 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180		Rotosymmetrical
Date	07-10-2015	Measurement Flux			1028.47 lm		
Measurement Distance	0.00						
LED Flux=1811,5lm LED Power=17,5W Eff=57% EfcLed=104lm/W EfcLum=47lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	91 98 99 100 100	D DIN 5040		A60			
F UTE	1.00 A	B NBN		BZ 1			

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.43	0.85	1.28	1.70	2.13	OC	0.43	0.85	1.28	1.70	2.13
OB	0.43	0.85	1.28	1.70	2.13	OD	0.43	0.85	1.28	1.70	2.13

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	1499.07	1422.93	1107.13	662.13	282.28	82.56	21.68	7.88	6.03	6.82
OB	1499.07	1422.93	1107.13	662.13	282.28	82.56	21.68	7.88	6.03	6.82
OC	1499.07	1422.93	1107.13	662.13	282.28	82.56	21.68	7.88	6.03	6.82
OD	1499.07	1422.93	1107.13	662.13	282.28	82.56	21.68	7.88	6.03	6.82

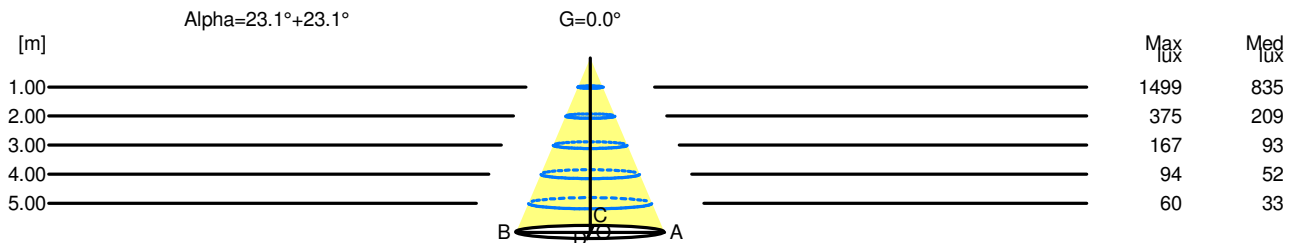

H[m]	D[m]	Max lux	Med lux	Alpha=23.1°+23.1°	G=0.0
1.00	0.85	1499	835		
2.00	1.70	375	209		
3.00	2.56	167	93		
4.00	3.41	94	52		
5.00	4.26	60	33		