

## Luminaire


Code M113611  
Name CHOCOLATE SOSPENSIONE LED 3000K DIMMERABILE moka

## Measurem.

Code FTS1400869  
Name CHOCOLATE SOSPENSIONE LED 3000K DIMMERABILE moka

Luminaire Flux	3868.00 lm	Luminaire Power	63.00 W	Efficacy	61.40 lm/W	Efficiency	100.00%
Lamps Flux	3868.00 lm	Maximum value	263.94 cd/klm	Position	C=0.00 G=9.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1145 mm	Width	160 mm	Height	40 mm
Rectangular Luminous Area		Length	1145 mm	Width	120 mm	Height	9 mm
Horizontal Luminous Area		0.137400 m2		Emitting area on Plane 180°		0.011450 m2	
Emitting area on Plane 0°		0.011450 m2		Emitting area on Plane 270°		0.001200 m2	
Emitting area on Plane 90°		0.001200 m2		Glare area at 76°		0.044350 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		18-12-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3868.00 lm	
4000K - I <sub>max</sub> =280 cd/klm - LED Flux=8230 lm - LED Power=55 W - Eff=47 % - EfcLED=150 lm/W - EfcLum=61 lm/W Ra=80 min - SDCM=4 - Life=L70(6K)>50,000 ore							
C.I.E.	52 84 96 69 100			D DIN 5040		B41	
F UTE	0.69 D + 0.31 T			B NBN		BZ 4	

1145mm x 160mm




Semipiani C

180.0 ——— 0.0  
270.0 - - - - 90.0

ULOR 31.25 %

DLOR 68.75 %

RN 31.25 %

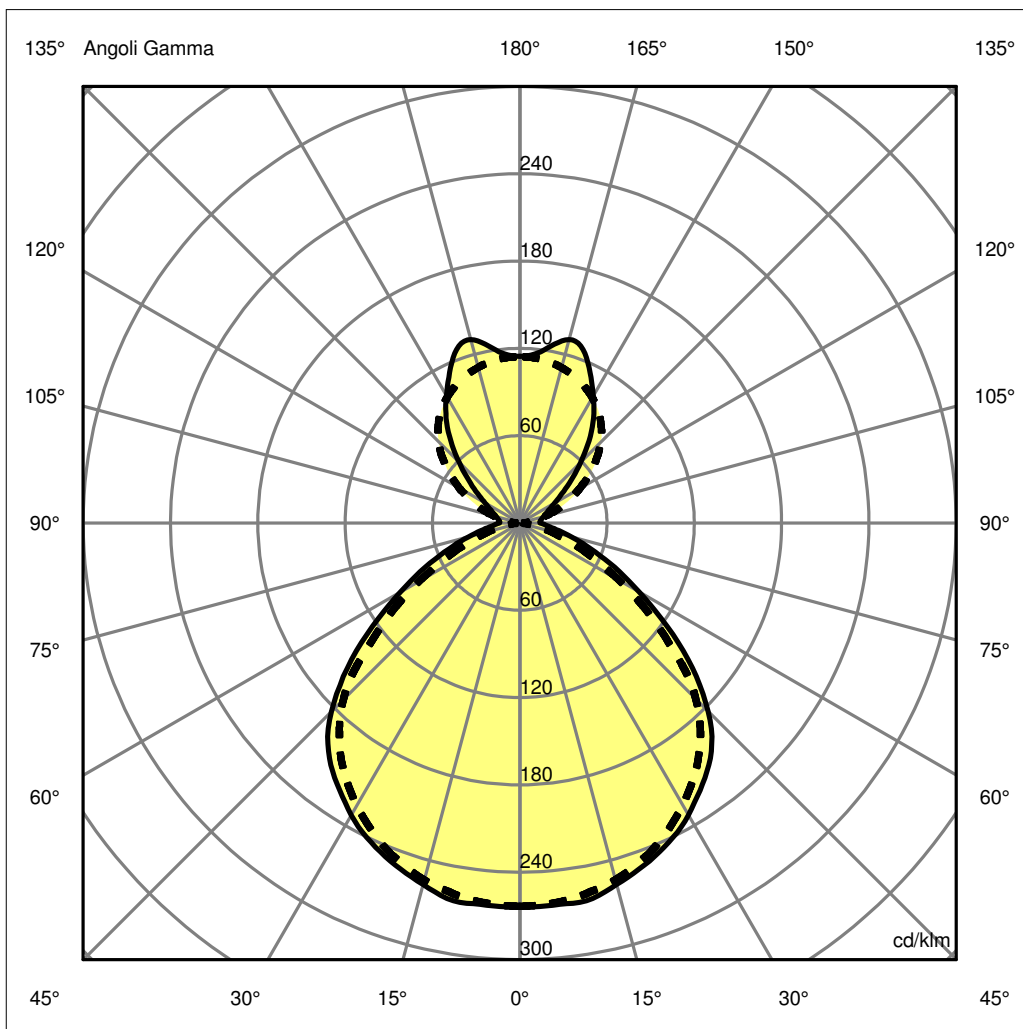

## Luminaire

Code M113611  
Name CHOCOLATE SOSPENSIONE LED 3000K DIMMERABILE moka

## Measurerm.


Code FTS1400869  
Name CHOCOLATE SOSPENSIONE LED 3000K DIMMERABILE moka

Luminaire Flux	3868.00 lm	Luminaire Power	63.00 W	Efficacy	61.40 lm/W	Efficiency	100.00%
Lamps Flux	3868.00 lm	Maximum value	263.94 cd/klm	Position	C=0.00 G=9.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1145 mm	Width	160 mm	Height	40 mm
Rectangular Luminous Area		Length	1145 mm	Width	120 mm	Height	9 mm
Horizontal Luminous Area		0.137400 m2		Emitting area on Plane 180°		0.011450 m2	
Emitting area on Plane 0°		0.011450 m2		Emitting area on Plane 270°		0.001200 m2	
Emitting area on Plane 90°		0.001200 m2		Glare area at 76°		0.044350 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		18-12-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3868.00 lm	
4000K - I <sub>max</sub> =280 cd/Klm - LED Flux=8230 lm - LED Power=55 W - Eff=47 % - EfcLED=150 lm/W - EfcLum=61 lm/W Ra=80 min - SDCM=4 - Life=L70(6K)>50,000 ore							
C.I.E.	52 84 96 69 100			D DIN 5040	B41		
F UTE	0.69 D + 0.31 T			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.36	2.72	4.08	5.44	6.80	OC	1.24	2.48	3.72	4.97	6.21
OB	1.36	2.72	4.08	5.44	6.80	OD	1.24	2.48	3.72	4.97	6.21

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1018.95	1019.38	994.66	936.13	846.90	708.43	478.17	277.80	142.68	71.83
OB	1018.95	1019.38	994.66	936.13	846.90	708.43	478.17	277.80	142.68	71.83
OC	1018.95	1014.33	981.91	913.26	812.65	662.76	419.24	208.87	82.07	15.88
OD	1018.95	1014.33	981.91	913.26	812.65	662.76	419.24	208.87	82.07	15.88

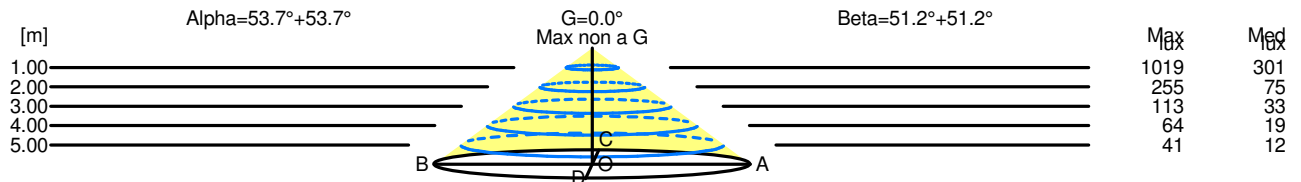

H[m]	D[m]	Max lux	Med lux	Alpha=53.7°+53.7°	G=0.0 Max non a G
1.00	2.72	1019	301		
2.00	5.44	255	75		
3.00	8.16	113	33		
4.00	10.88	64	19		
5.00	13.60	41	12		

H[m]	D[m]	Max lux	Med lux	Beta=51.2°+51.2°	G=0.0 Max non a G
1.00	2.48	1019	301		
2.00	4.97	255	75		
3.00	7.45	113	33		
4.00	9.93	64	19		
5.00	12.42	41	12		

**Luminaire**

Code M113611  
Name CHOCOLATE SOSPENSIONE LED 3000K DIMMERABILE moka

**Measur.**

Code FTS1400869  
Name CHOCOLATE SOSPENSIONE LED 3000K DIMMERABILE moka

Luminaire Flux	3868.00 lm	Luminaire Power	63.00 W	Efficacy	61.40 lm/W	Efficiency	100.00%
Lamps Flux	3868.00 lm	Maximum value	263.94 cd/klm	Position	C=0.00 G=9.00	CG	Double Symmetrical

**UGR**  
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	16.2	17.1	16.9	17.8	18.1	15.7	16.6	16.4	17.3	18.1
x=2H y=3H	17.2	18.0	17.9	18.7	18.8	16.4	17.2	17.2	18.0	18.8
x=2H y=4H	17.5	18.3	18.3	19.0	19.0	16.6	17.4	17.4	18.1	19.0
x=2H y=6H	17.9	18.6	18.6	19.3	19.0	16.7	17.4	17.4	18.1	19.0
x=2H y=8H	18.0	18.7	18.8	19.4	19.0	16.7	17.4	17.5	18.1	19.0
x=2H y=12H	18.2	18.8	19.0	19.6	19.0	16.7	17.3	17.4	18.1	19.0
x=4H y=2H	16.5	17.3	17.2	18.0	18.5	16.1	16.9	16.9	17.6	18.5
x=4H y=3H	17.7	18.3	18.4	19.1	19.3	17.0	17.6	17.8	18.4	19.3
x=4H y=4H	18.2	18.7	19.0	19.5	19.6	17.3	17.8	18.1	18.6	19.6
x=4H y=6H	18.6	19.1	19.4	19.9	19.7	17.4	17.9	18.2	18.7	19.7
x=4H y=8H	18.8	19.3	19.7	20.1	19.7	17.4	17.9	18.3	18.7	19.7
x=4H y=12H	19.1	19.5	19.9	20.3	19.7	17.4	17.8	18.3	18.7	19.7
x=8H y=4H	18.3	18.7	19.1	19.5	19.7	17.5	17.9	18.3	18.7	19.7
x=8H y=6H	18.8	19.2	19.7	20.0	19.9	17.7	18.1	18.6	18.9	19.9
x=8H y=8H	19.2	19.5	20.0	20.3	20.0	17.8	18.1	18.6	18.9	20.0
x=8H y=12H	19.5	19.8	20.4	20.7	20.0	17.8	18.1	18.7	19.0	20.0
x=12H y=4H	18.2	18.6	19.1	19.5	19.7	17.5	17.9	18.3	18.7	19.7
x=12H y=6H	18.8	19.2	19.7	20.0	20.0	17.7	18.1	18.6	18.9	20.0
x=12H y=8H	19.2	19.5	20.1	20.4	20.1	17.9	18.1	18.7	19.0	20.1