

Luminaire

Code M327020
 Name EVERYTHING 80 QUADRATO TRIM FISSO LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Measurement

Code FTS1602742
 Name EVERYTHING 80 QUADRATO TRIM FISSO LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1002.82 lm	Luminaire Power	13.00 W	Efficacy	77.14 lm/W	Efficiency	100.00%
Sources Flux	1002.82 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 08-04-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 90 1002.82 lm				

LED Flux=1330lm LED Power=13W Eff=75,4% EfcLed=102lm/W EfcLum=77lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 94 99 100 100 100
 F UTE 1.00 A

D DIN 5040
 B NBN
 A60
 BZ 1


80mm x 80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR100.00 %
 RN 0.00 %

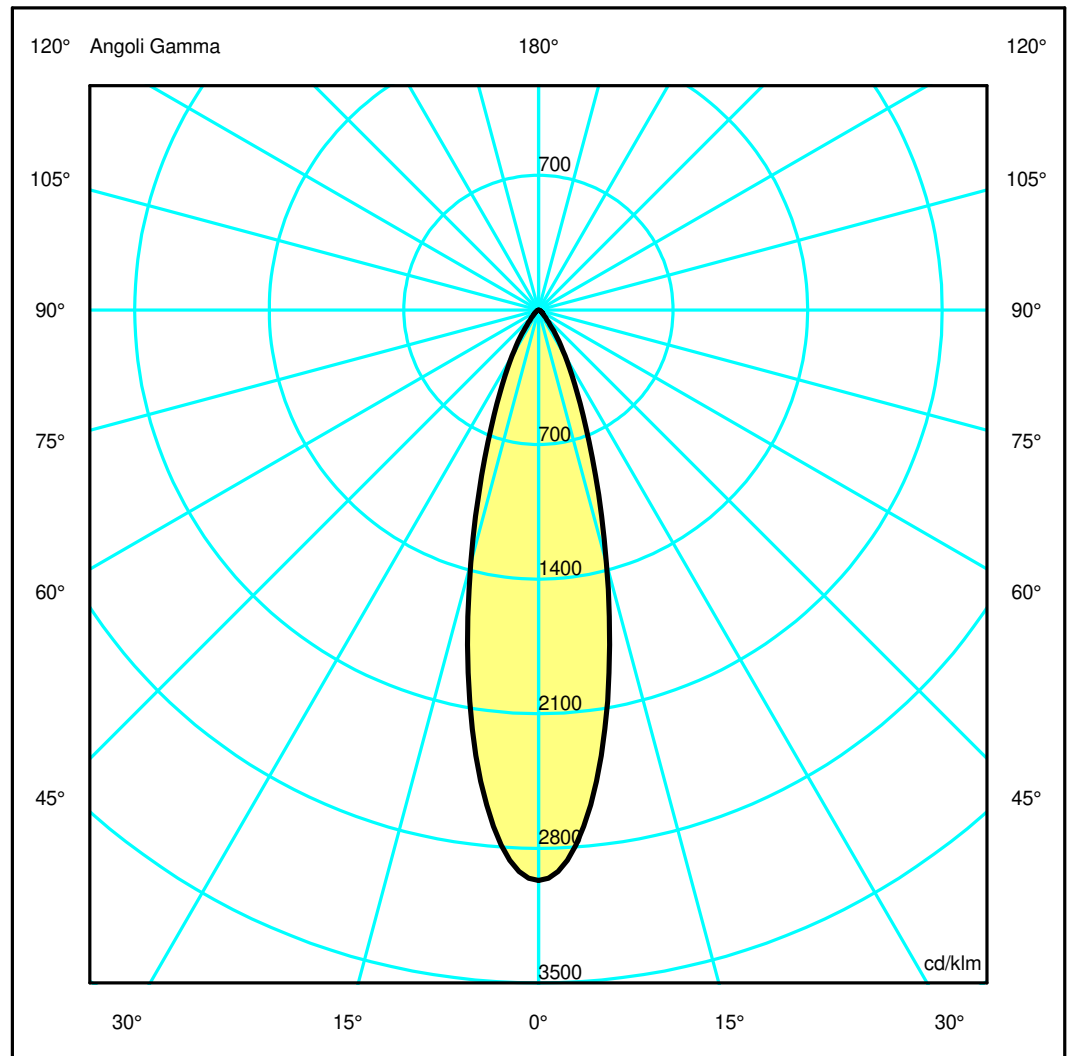

Luminaire

Code M327020
Name EVERYTHING 80 QUADRATO TRIM FISSO LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Measurement


Code FTS1602742
Name EVERYTHING 80 QUADRATO TRIM FISSO LED 2700K FLOOD CORNICE BIANCO / DEFL. BIANCO

Luminaire Flux	1002.82 lm	Luminaire Power	13.00 W	Efficacy	77.14 lm/W	Efficiency	100.00%
Sources Flux	1002.82 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 08-04-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 1002.82 lm	
LED Flux=1330lm LED Power=13W Eff=75,4% EfcLed=102lm/W EfcLum=77lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	94 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	1.00	1.26	OC	0.25	0.50	0.75	1.00	1.26
OB	0.25	0.50	0.75	1.00	1.26	OD	0.25	0.50	0.75	1.00	1.26

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2975.16	2702.99	1367.93	478.51	151.57	41.56	21.41	11.09	2.92	0.00
OB	2975.16	2702.99	1367.93	478.51	151.57	41.56	21.41	11.09	2.92	0.00
OC	2975.16	2702.99	1367.93	478.51	151.57	41.56	21.41	11.09	2.92	0.00
OD	2975.16	2702.99	1367.93	478.51	151.57	41.56	21.41	11.09	2.92	0.00

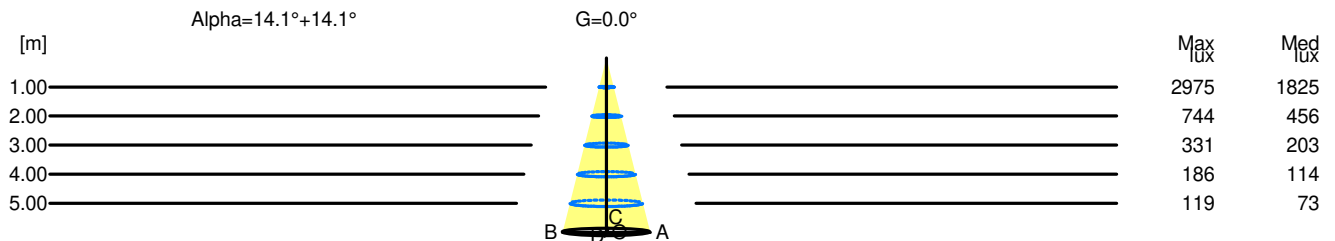

H[m]	D[m]	Max lux	Med lux	Alpha=14.1°+14.1°	G=0.0
1.00	0.50	2975	1825		
2.00	1.00	744	456		
3.00	1.51	331	203		
4.00	2.01	186	114		
5.00	2.51	119	73		