

## Luminaire

Code M254800  
 Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 3000K FLOOD DEFL. BIANCO

## Measurement

Code FTS1602241  
 Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 3000K FLOOD DEFL. BIANCO

Luminaire Flux	1048.06 lm	Luminaire Power	13.00 W	Efficacy	80.62 lm/W	Efficiency	100.00%
Sources Flux	1048.06 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 08-04-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 90 1048.06 lm				
LED Flux=1390lm LED Power=13W Eff=75,4% EfcLed=107lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	94 99 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				


80mm x 80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR100.00 %  
 RN 0.00 %

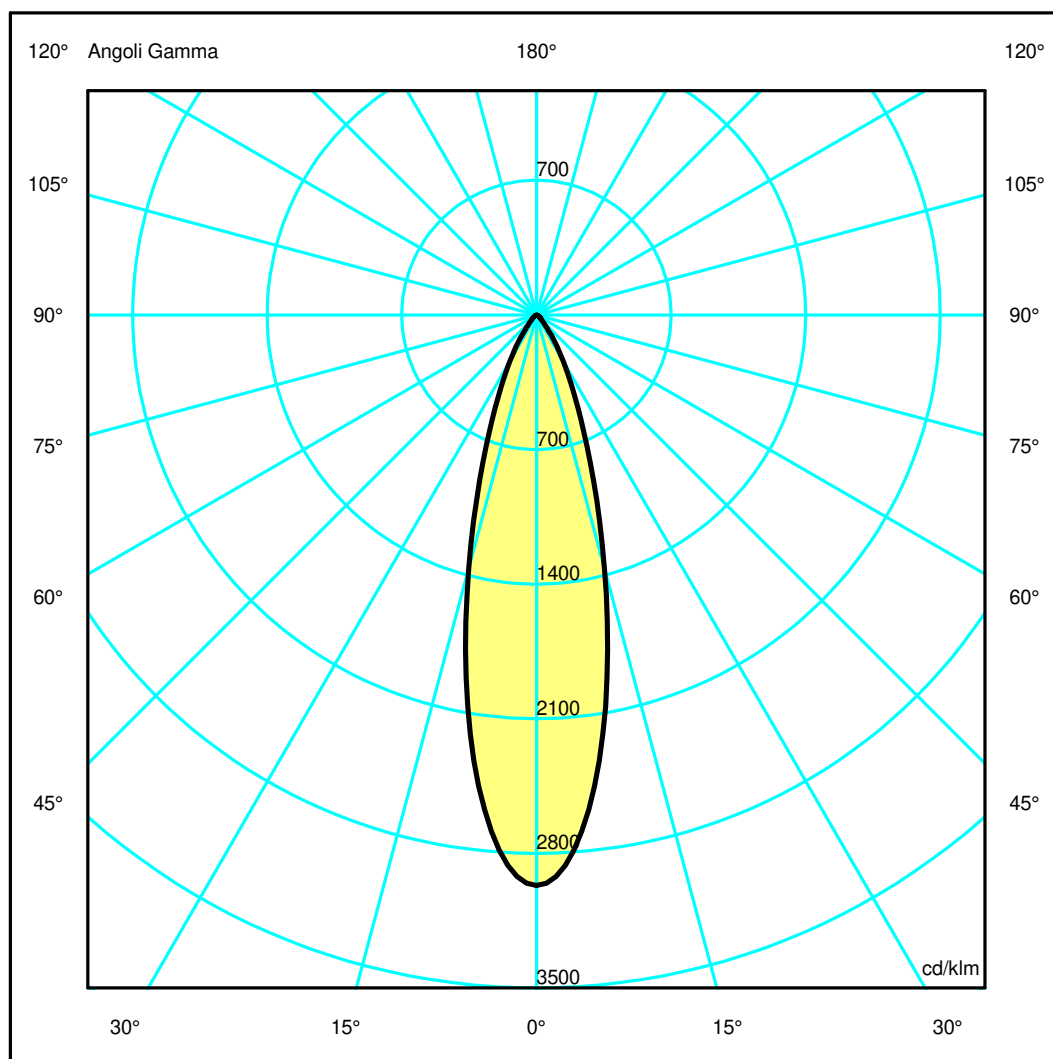

## Luminaire

Code M254800  
Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 3000K FLOOD DEFL. BIANCO

## Measurerm.


Code FTS1602241  
Name EVERYTHING 80 QUADRATO TRIMLESS FISSO LED 3000K FLOOD DEFL. BIANCO

Luminaire Flux	1048.06 lm	Luminaire Power	13.00 W	Efficacy	80.62 lm/W	Efficiency	100.00%
Sources Flux	1048.06 lm	Maximum value	2966.80 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001963 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000475 m2				
Coordinate system Date Measurement Distance	CG 08-04-2015 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 90 1048.06 lm				
LED Flux=1390lm LED Power=13W Eff=75,4% EfcLed=107lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	94 99 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	1.00	1.26	OC	0.25	0.50	0.75	1.00	1.26
OB	0.25	0.50	0.75	1.00	1.26	OD	0.25	0.50	0.75	1.00	1.26

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00
OB	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00
OC	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00
OD	3109.38	2824.93	1429.64	500.09	158.41	43.43	22.37	11.59	3.05	0.00

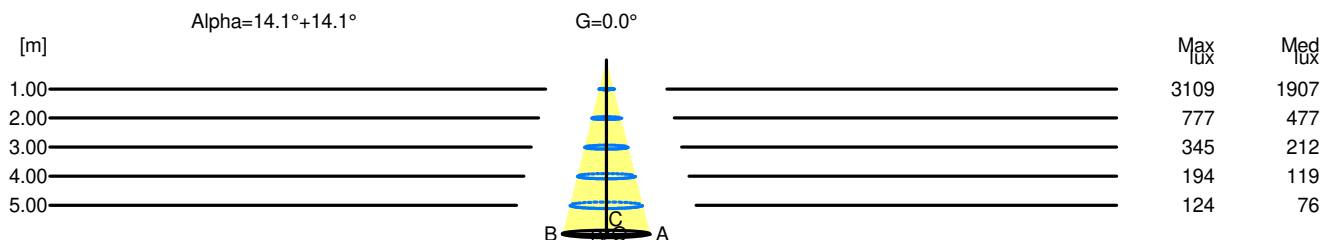

H[m]	D[m]	Max lux	Med lux	Alpha=14.1°+14.1°	G=0.0
1.00	0.50	3109	1907		
2.00	1.00	777	477		
3.00	1.51	345	212		
4.00	2.01	194	119		
5.00	2.51	124	76		