Luminaire
Code 2136C10AHEB
Name AOL SYSTEM C/W LIN120 SLV TER 3500K HEB
Measurem.
Code FTS2600172
Name AOL SYSTEM C/W LIN120 SLV TER 3500K HEB

Luminaire Flux	2267 lm	Luminaire Power	21.0 W	Efficacy	107.952 lm/W	Efficiency	100.00%
Source Flux	2267 lm	Maximum value	156.12 cd/klm	Position	C=5.00 G=5.00	CG	Double Symmetrical


Rectangular Luminaire	Length	1200 mm	Width	50 mm	Height	50 mm
Rectangular Luminous Area	Length	1200 mm	Width	50 mm	Height	50 mm

Horizontal Luminous Area	0.060000 m2	Emitting area on Plane 180°	0.060000 m2
Emitting area on Plane 0°	0.060000 m2	Emitting area on Plane 270°	0.002500 m2
Emitting area on Plane 90°	0.002500 m2	Glare area at 76°	0.072733 m2


Coordinate system	CG	Symmetry Type	Double Symmetrical
Date	26-03-2024	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	2267 lm

LED Flux=2842lm LED Power=21W Eff=80% EfcLed=135lm/W EfcLum=108lm/W CCT=3500K Ra=90 R9=50 SDCM=3 L70(10k)=60000h

C.I.E.	33 60 82 69 100	D DIN 5040	B21
F UTE	0.69 H + 0.31 T	B NBN	BZ 6

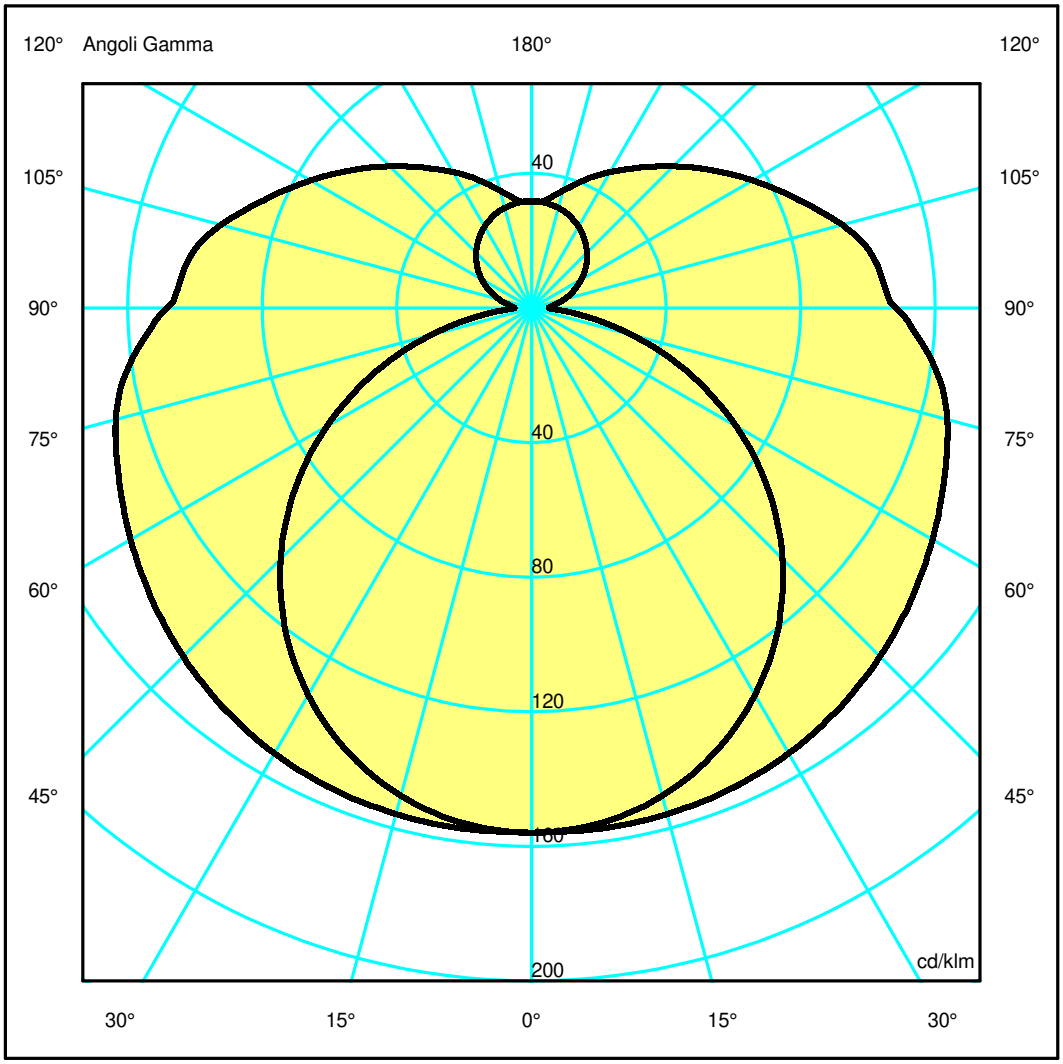

1200mm x 50mm



Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 31.35 %
DLOR 68.65 %
RN 31.35 %