


Luminaire

Code AX94404
Name HELGOLAND 120 FIX IP44 2700K XF NRO

Measurerm.

Code FTS2600075.
Name HELGOLAND 120 FIX IP44 2700K XF NRO

Luminaire Flux	1113 lm	Luminaire Power	8.5 W	Efficacy	130.941 lm/W	Efficiency	100.00%
Source Flux	1113 lm	Maximum value	1232.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1113 lm	
LED Flux=1458lm LED Power=8.5W Eff=76% EfcLed=171lm/W EfcLum=131lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

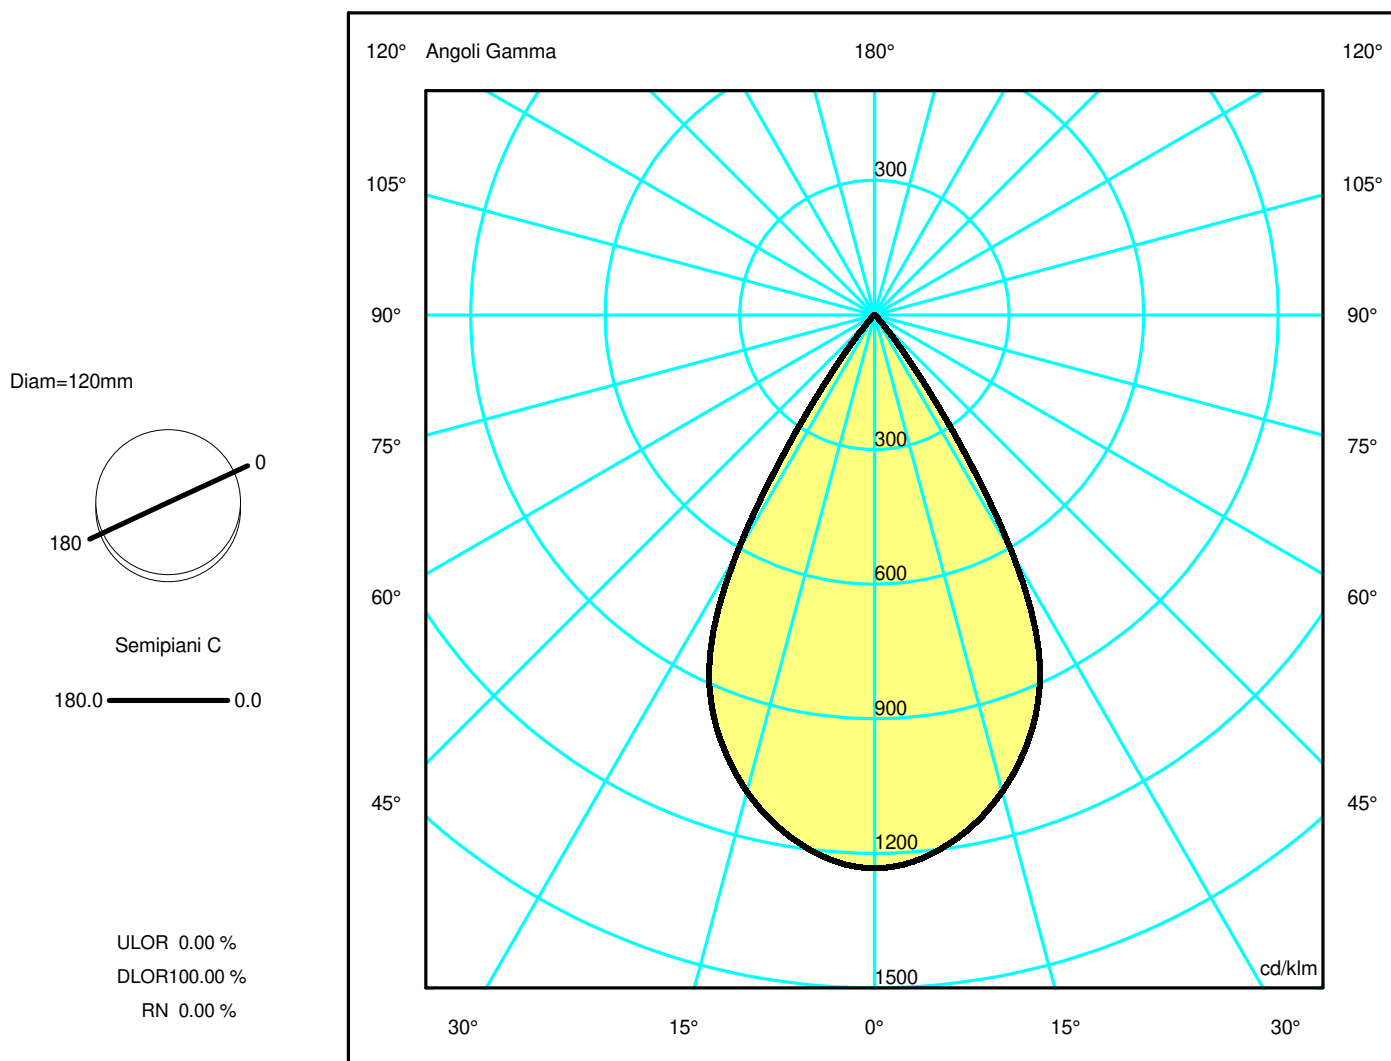

Luminaire

Code AX94404
Name HELGOLAND 120 FIX IP44 2700K XF NRO

Measurerm.


Code FTS2600075.
Name HELGOLAND 120 FIX IP44 2700K XF NRO

Luminaire Flux	1113 lm	Luminaire Power	8.5 W	Efficacy	130.941 lm/W	Efficiency	100.00%
Source Flux	1113 lm	Maximum value	1232.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1113 lm	
LED Flux=1458lm LED Power=8.5W Eff=76% EfcLed=171lm/W EfcLum=131lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.58	1.15	1.73	2.31	2.89	OC	0.58	1.15	1.73	2.31	2.89
OB	0.58	1.15	1.73	2.31	2.89	OD	0.58	1.15	1.73	2.31	2.89

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1372.25	1352.52	1223.85	971.62	273.81	14.37	5.15	2.02	0.48	0.31
OB	1372.25	1352.52	1223.85	971.62	273.81	14.37	5.15	2.02	0.48	0.31
OC	1372.25	1352.52	1223.85	971.62	273.81	14.37	5.15	2.02	0.48	0.31
OD	1372.25	1352.52	1223.85	971.62	273.81	14.37	5.15	2.02	0.48	0.31

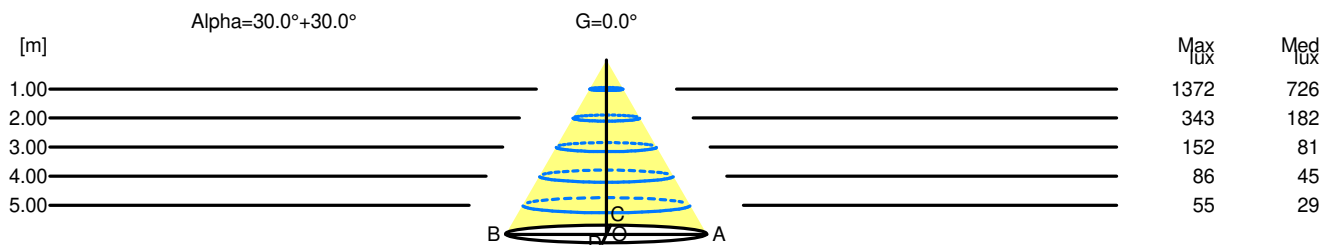

H[m]	D[m]	Max lux	Med lux	Alpha=30.0°+30.0°	G=0.0
1.00	1.15	1372	726		
2.00	2.31	343	182		
3.00	3.46	152	81		
4.00	4.62	86	45		
5.00	5.77	55	29		