

Luminaire


Code CH53002
Name SYLT HELGOLAND 90 3000K FL BLU

Measurement

Code FTS2400512
Name SYLT HELGOLAND 90 3000K FL BLU

Luminaire Flux	756 lm	Luminaire Power	6.0 W	Efficacy	126.000 lm/W	Efficiency	100.00%
Source Flux	756 lm	Maximum value	3347.51 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	12 mm		
Round Luminous Area		Diam.	64 mm	Height	0 mm		
Horizontal Luminous Area		0.003217 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000778 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		756 lm	
LED Flux=1081lm LED Power=6W Eff=70% EfcLed=180lm/W EfcLum=126lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Diam=90mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

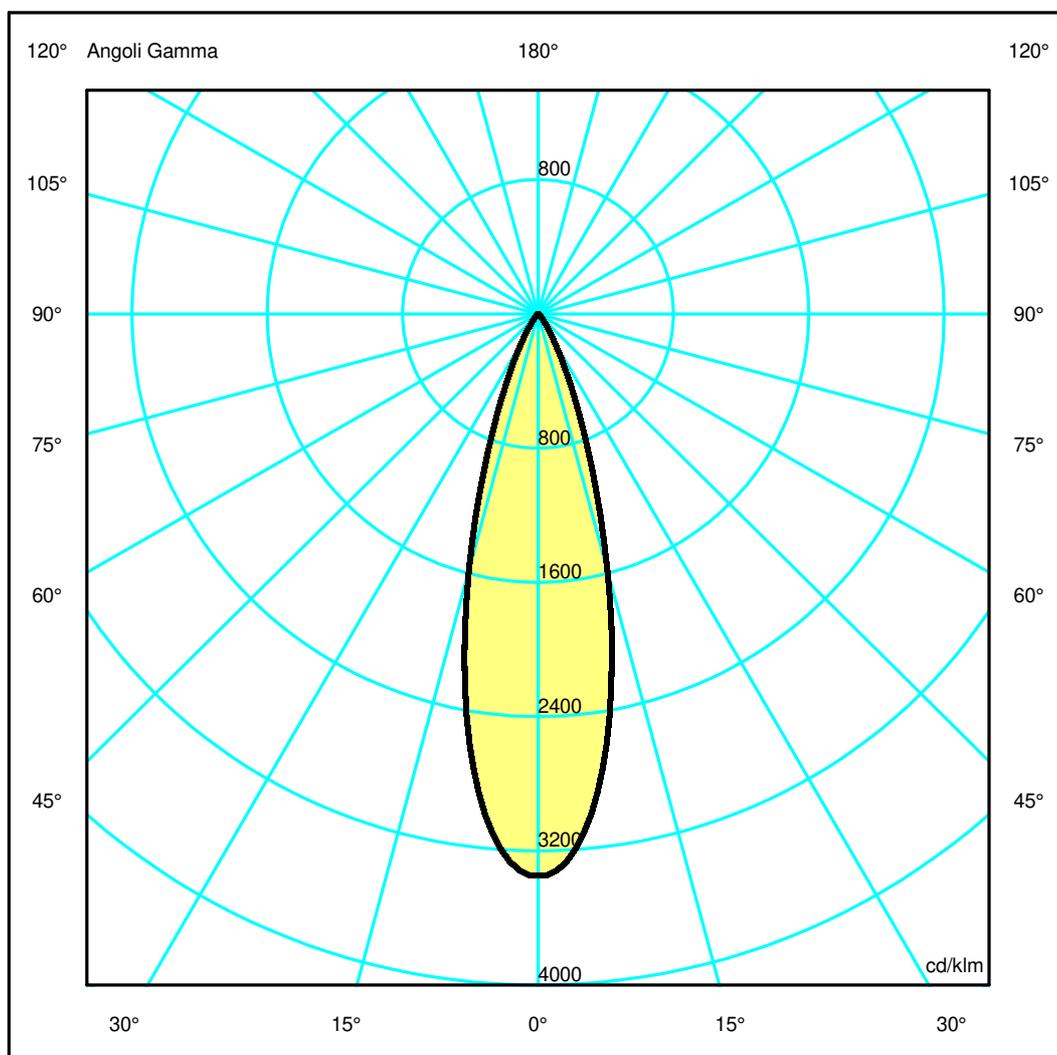

Luminaire

Code CH53002
Name SYLT HELGOLAND 90 3000K FL BLU

Measurment


Code FTS2400512
Name SYLT HELGOLAND 90 3000K FL BLU

Luminaire Flux	756 lm	Luminaire Power	6.0 W	Efficacy	126.000 lm/W	Efficiency	100.00%
Source Flux	756 lm	Maximum value	3347.51 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	12 mm		
Round Luminous Area		Diam.	64 mm	Height	0 mm		
Horizontal Luminous Area		0.003217 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000778 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		756 lm	
LED Flux=1081lm LED Power=6W Eff=70% EfcLed=180lm/W EfcLum=126lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.52	0.77	1.03	1.29	OC	0.26	0.52	0.77	1.03	1.29
OB	0.26	0.52	0.77	1.03	1.29	OD	0.26	0.52	0.77	1.03	1.29

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2530.72	2345.92	1194.74	320.28	66.45	15.54	7.34	4.01	1.39	0.25
OB	2530.72	2345.92	1194.74	320.28	66.45	15.54	7.34	4.01	1.39	0.25
OC	2530.72	2345.92	1194.74	320.28	66.45	15.54	7.34	4.01	1.39	0.25
OD	2530.72	2345.92	1194.74	320.28	66.45	15.54	7.34	4.01	1.39	0.25

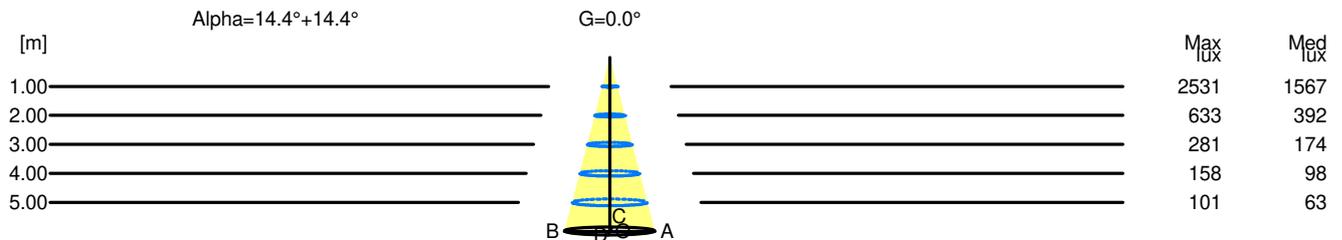

H[m]	D[m]	Max lux	Med lux	Alpha=14.4°+14.4°	G=0.0
1.00	0.52	2531	1567		
2.00	1.03	633	392		
3.00	1.55	281	174		
4.00	2.06	158	98		
5.00	2.58	101	63		