


Luminaire

Code AY00505
Name SERIES Y-MOD.1200MM DIR.DIFF. 940 SIL

Measurement

Code FTS1802380-A
Name SERIES Y-MOD.1200MM DIR.DIFF. 940 SIL

Luminaire Flux	3643 lm	Luminaire Power	35.0 W	Efficacy	104.073 lm/W	Efficiency	100.00%
Source Flux	3643 lm	Maximum value	414.79 cd/klm	Position	C=30.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1125 mm	Width	90 mm	Height	90 mm
Rectangular Luminous Area		Length	1120 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area		0.084000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.020321 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		28-02-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3643 lm	
LED Flux=5178lm LED Power=30W Eff=70% EfcLed=174lm/W EfcLum=104lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	52 83 97 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

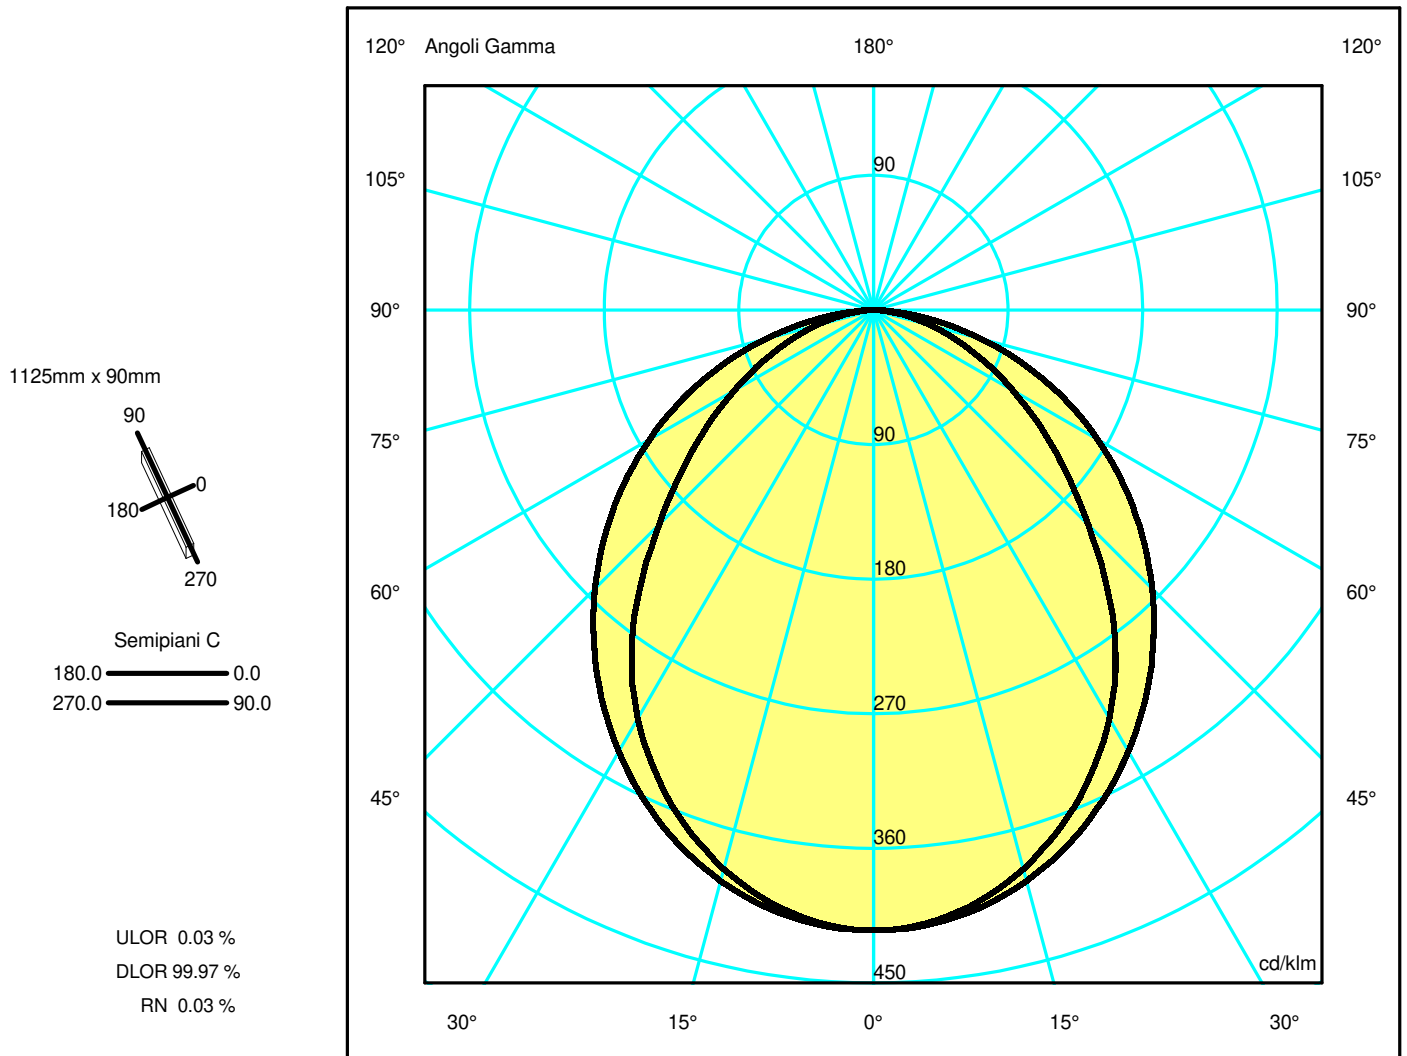

Luminaire

Code AY00505
Name SERIES Y-MOD.1200MM DIR.DIFF. 940 SIL

Measurerm.

Code FTS1802380-A
Name SERIES Y-MOD.1200MM DIR.DIFF. 940 SIL

Luminaire Flux	3643 lm	Luminaire Power	35.0 W	Efficacy	104.073 lm/W	Efficiency	100.00%
Source Flux	3643 lm	Maximum value	414.79 cd/klm	Position	C=30.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1125 mm	Width	90 mm	Height	90 mm
Rectangular Luminous Area		Length	1120 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area		0.084000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.020321 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		28-02-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3643 lm	


LED Flux=5178lm LED Power=30W Eff=70% EfcLed=174lm/W EfcLum=104lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E.	52 83 97 100 100	D DIN 5040	A40
F UTE	1.00 D	B NBN	BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.98	1.96	2.94	3.92	4.90	OC	1.40	2.81	4.21	5.61	7.01
OB	0.98	1.96	2.94	3.92	4.90	OD	1.40	2.81	4.21	5.61	7.01

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1510.82	1498.82	1409.75	1249.88	1027.32	739.37	497.32	300.00	145.60	27.98
OB	1510.82	1498.82	1409.75	1249.88	1027.32	739.37	497.32	300.00	145.60	27.98
OC	1510.82	1503.11	1440.16	1319.57	1155.57	960.58	744.69	513.51	273.16	63.40
OD	1510.82	1503.11	1440.16	1319.57	1155.57	960.58	744.69	513.51	273.16	63.40

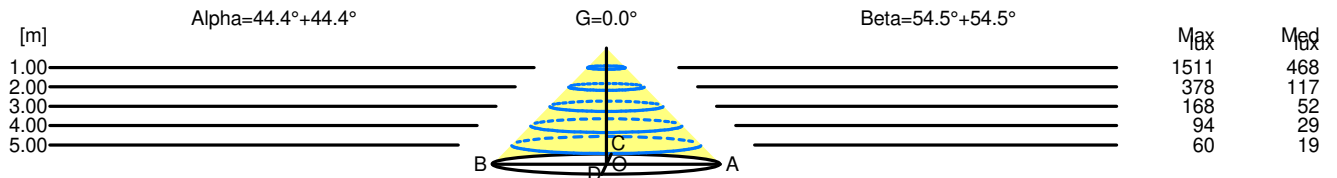

H[m]	D[m]	Max lux	Med lux	Alpha=44.4°+44.4°	G=0.0
1.00	1.96	1511	468		
2.00	3.92	378	117		
3.00	5.88	168	52		
4.00	7.84	94	29		
5.00	9.80	60	19		

H[m]	D[m]	Max lux	Med lux	Beta=54.5°+54.5°	G=0.0
1.00	2.81	1511	468		
2.00	5.61	378	117		
3.00	8.42	168	52		
4.00	11.22	94	29		
5.00	14.03	60	19		