

Luminaire

Code M323865_30°
Name EVERY 150 RD TR OR LED 2700 2X16°ME/SI_30°

Measurement


Code FTS2400295.
Name EVERY 150 RD TR OR LED 2700 2X16°ME/SI_30°

Luminaire Flux	2009 lm	Luminaire Power	20.0 W	Efficacy	100.450 lm/W	Efficiency	100.00%
Source Flux	2009 lm	Maximum value	1137.11 cd/klm	Position	C=5.00 G=10.00	CG	Sym. on planes 0-180
Round Luminaire		Diam.	136 mm	Height	138 mm		
Round Luminous Area		Diam.	121 mm	Height	0 mm		
Horizontal Luminous Area			0.011499 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.002782 m2
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2009 lm	

LED Flux=2979lm LED Power=20W Eff=67% EfcLed=149lm/W EfcLum=100lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h

C.I.E. 85 99 100 100 100
F UTE 1.00 A

D DIN 5040 A60
B NBN BZ 1

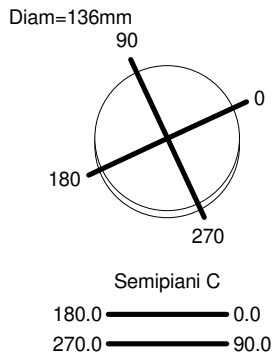

ULOR 0.03 %
DLOR 99.97 %
RN 0.03 %

