

Led Net - Suspension - App Compatible



Michele De Lucchi
Alberto Nason



DESCRIPTION



PRODUCT CODE: 1575050APP

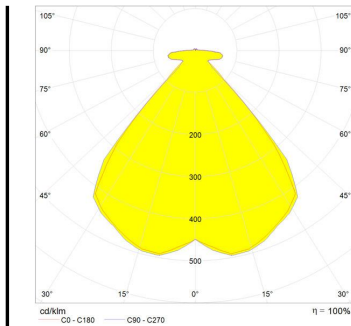

FEATURES

- Article Code: **1575050APP**
- Colour: **Polished white**
- Installation: **Suspension**
- Material: **Aluminium, methacrylate**
- Series: **Design Collection**
- Environment: **Indoor**
- Area contract: **Hospitality**
- Emission: **Direct**

design by **Michele De Lucchi, Alberto Nason**

Blendsbewertung nach UGR

η Decke	70	70	50	50	30	70	70	50	50	30	30
η Wände	50	30	50	30	30	50	30	50	30	30	30
η Boden	20	20	20	20	20	20	20	20	20	20	20
Raumgröße X Y											
Blickrichtung quer zur Leuchtenscheibe											
Blickrichtung längs zur Leuchtenscheibe											
2H	2H	9.4	10.4	9.7	10.7	11.0	9.5	10.5	9.8	10.7	11.0
3H	3H	11.9	12.4	11.9	12.7	13.1	11.5	12.4	11.9	12.8	13.1
4H	4H	13.2	14.1	13.6	14.6	14.8	13.3	14.2	13.7	14.6	14.9
6H	6H	15.3	16.1	15.7	16.5	16.8	15.3	16.2	15.7	16.5	16.9
8H	8H	16.3	17.1	16.7	17.5	17.9	16.4	17.2	16.8	17.6	17.9
12H	12H	17.3	18.1	17.7	18.5	18.9	17.4	18.2	17.9	18.6	19.0
3H	3H	8.8	9.7	9.2	10.0	10.4	8.9	9.8	9.3	10.1	10.5
4H	4H	12.5	13.3	13.0	13.7	14.1	12.6	13.3	13.0	13.7	14.1
6H	6H	14.8	15.3	15.0	15.7	16.1	14.8	15.3	15.1	15.7	16.2
8H	8H	16.9	17.5	17.3	17.9	18.4	16.9	17.5	17.4	18.0	18.4
12H	12H	18.5	19.0	18.8	19.5	19.9	18.5	19.0	18.9	19.5	19.9
3H	3H	10.1	10.6	10.3	11.0	11.4	10.2	10.8	10.5	11.2	11.6
4H	4H	13.5	14.0	13.7	14.4	14.8	13.6	14.1	13.9	14.5	14.9
6H	6H	15.9	16.4	16.1	16.8	17.2	15.9	16.4	16.2	16.8	17.2
8H	8H	17.7	18.1	17.8	18.5	18.9	17.7	18.1	17.9	18.5	18.9
12H	12H	19.1	19.6	19.3	20.0	20.4	19.2	19.8	19.7	20.2	20.7
4H	4H	15.5	16.0	15.7	16.4	16.8	15.5	16.1	15.9	16.5	16.9
6H	6H	18.0	18.5	18.2	19.0	19.4	18.0	18.5	18.3	18.9	19.3
8H	8H	19.3	19.7	19.4	20.2	20.6	19.3	19.7	19.5	20.2	20.6
12H	12H	20.6	20.9	21.1	21.8	22.1	20.7	21.0	21.2	21.6	22.2
4H	4H	15.7	16.2	15.9	16.6	17.0	15.7	16.2	16.0	16.6	17.0
6H	6H	18.2	18.7	18.4	19.2	19.6	18.4	18.9	18.7	19.3	19.7
8H	8H	19.7	20.1	19.8	20.6	21.0	19.8	20.1	20.3	20.7	21.2

Varianz der Beobachterposition für Leuchtenabstände 5

η = 1,0H	+0.2 / -0.2	+0.2 / -0.2
η = 1,5H	+0.3 / -0.4	+0.3 / -0.4
η = 2,0H	+0.5 / -0.6	+0.5 / -0.6

Standardabweichung
Winkelsumme

LUMINAIRE

- Watt: **43W**
- Voltage: **220-240V**
- Delivered lumens output: **2502lm**
- CCT: **3000K**
- Efficiency: **81%**
- Efficacy: **58.19lm/W**
- CRI: **80**

Notes

LEDs included.

DIMENSIONS

- Height: **cm 2.4**
- Diameter: **cm 65**
- Max Height from ceiling: **cm 200**
- Glow Wire Test: **650°**

SOURCES INCLUDED

- Category: **Led**
- Number: **17**
- Watt: **2.17W**
- Delivered lumens output: **153lm**
- Color temperature (K): **3000K**
- CRI: **80**
- Color Tolerance: **MacAdam 3SDCM**
- Efficacy: **71lm/W**
- Service Life: **50000-L70**