


Vector Track 95 16° 2700K Undimmable Brushed copper


Carlotta de Bevilacqua



DESCRIPTION

Three sizes with three different beam angles each (spot, flood, wide flood) obtained by means of refractive or hybrid optical units. Vector 55 track DALI zoom optic (22°-32°). Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation and 90° tilting for maximum emission adjustment freedom. Vector 95 available only in track version. Version with compact 4-conductor (3p+n) adapter with hidden LED driver and not-dimmable phase selector.

IP20   

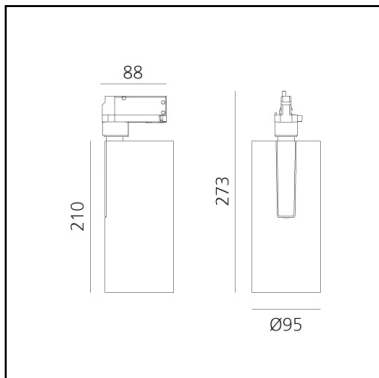

LUMINAIRE

- Watt: **30W**
- Delivered lumens output: **2590lm**
- CCT: **2700K**
- Efficiency: **78%**
- Efficacy: **86.34lm/W**
- CRI: **90**

Notes

220/240Vac 50/60Hz Electronic ballast included.

PRODUCT CODE: AN21118

FEATURES

- Article Code: **AN21118**
- Colour: **Brushed Copper**
- Installation: **ProjectorTrack**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- design by: **Carlotta de Bevilacqua**

DIMENSIONS

- Height: **cm 27.3**
- Diameter: **cm 9.5**
- Base Length: **cm 8.8**
- Inclination: **-90+90**
- Rotation: **360°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **35W**
- Color temperature (K): **2700K**

Accessories



Adjustable dowsers M059910



Lens for elliptical emission M282007



Anti-dazzle louvre M282100



Accessories holder - Vector 95 AP92100



Soft filter M056807