

Luminaire

Code BQ71101
Name VECTOR 30 WALL NO SW 927 SP WHT

Measurement

Code FTS2300012
Name VECTOR 30 WALL NO SW 927 SP WHT

Luminaire Flux	276 lm	Luminaire Power	5.5 W	Efficacy	50.104 lm/W	Efficiency	100.00%
Source Flux	276 lm	Maximum value	15251.95 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	30 mm	Height	76 mm		
Round Luminous Area		Diam.	20 mm	Height	0 mm		
Horizontal Luminous Area		0.000314 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000076 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-11-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		276 lm	
LED Flux=389lm LED Power=3.9W Eff=71% EfcLed=99lm/W EfcLum=50lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=36000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Diam=30mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %



Luminaire

Code BQ71101
Name VECTOR 30 WALL NO SW 927 SP WHT

Measurem.


Code FTS2300012
Name VECTOR 30 WALL NO SW 927 SP WHT

Luminaire Flux	276 lm	Luminaire Power	5.5 W	Efficacy	50.104 lm/W	Efficiency	100.00%
Source Flux	276 lm	Maximum value	15251.95 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	30 mm	Height	76 mm		
Round Luminous Area		Diam.	20 mm	Height	0 mm		
Horizontal Luminous Area		0.000314 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000076 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		08-11-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		276 lm	
LED Flux=389lm LED Power=3.9W Eff=71% EfcLed=99lm/W EfcLum=50lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=36000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.11	0.22	0.33	0.43	0.54	OC	0.11	0.22	0.33	0.43	0.54
OB	0.11	0.22	0.33	0.43	0.54	OD	0.11	0.22	0.33	0.43	0.54

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4202.98	2661.92	206.09	19.69	4.68	1.41	0.54	0.24	0.15	0.14
OB	4202.98	2661.92	206.09	19.69	4.68	1.41	0.54	0.24	0.15	0.14
OC	4202.98	2661.92	206.09	19.69	4.68	1.41	0.54	0.24	0.15	0.14
OD	4202.98	2661.92	206.09	19.69	4.68	1.41	0.54	0.24	0.15	0.14

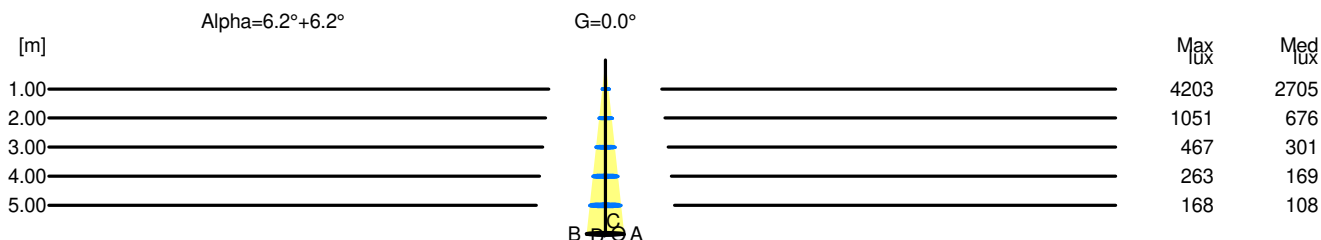

H[m]	D[m]	Max lux	Med lux	Alpha=6.2°+6.2°	G=0.0
1.00	0.22	4203	2705		
2.00	0.43	1051	676		
3.00	0.65	467	301		
4.00	0.87	263	169		
5.00	1.08	168	108		