

Luminaire

Code CK03904
Name HOY SPOT LENS 65 SEMI RCS 2700K XF NRO

Measurem.

Code FTS2600126
Name HOY SPOT LENS 65 SEMI RCS 2700K XF NRO

| | | | | | | | |
|---|---------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1483 lm | Luminaire Power | 15.5 W | Efficacy | 95.677 lm/W | Efficiency | 100.00% |
| Source Flux | 1483 lm | Maximum value | 1278.16 cd/klm | Position | C=0.00 G=5.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 65 mm | Height | 85 mm | | |
| Round Luminous Area | | Diam. | 45 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.001590 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000385 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 30-03-2026 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1483 lm | |
| LED Flux=1944lm LED Power=14W Eff=76% EfcLed=142lm/W EfcLum=96lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(17k)=50000h | | | | | | | |
| C.I.E. | 97 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Diam=65mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

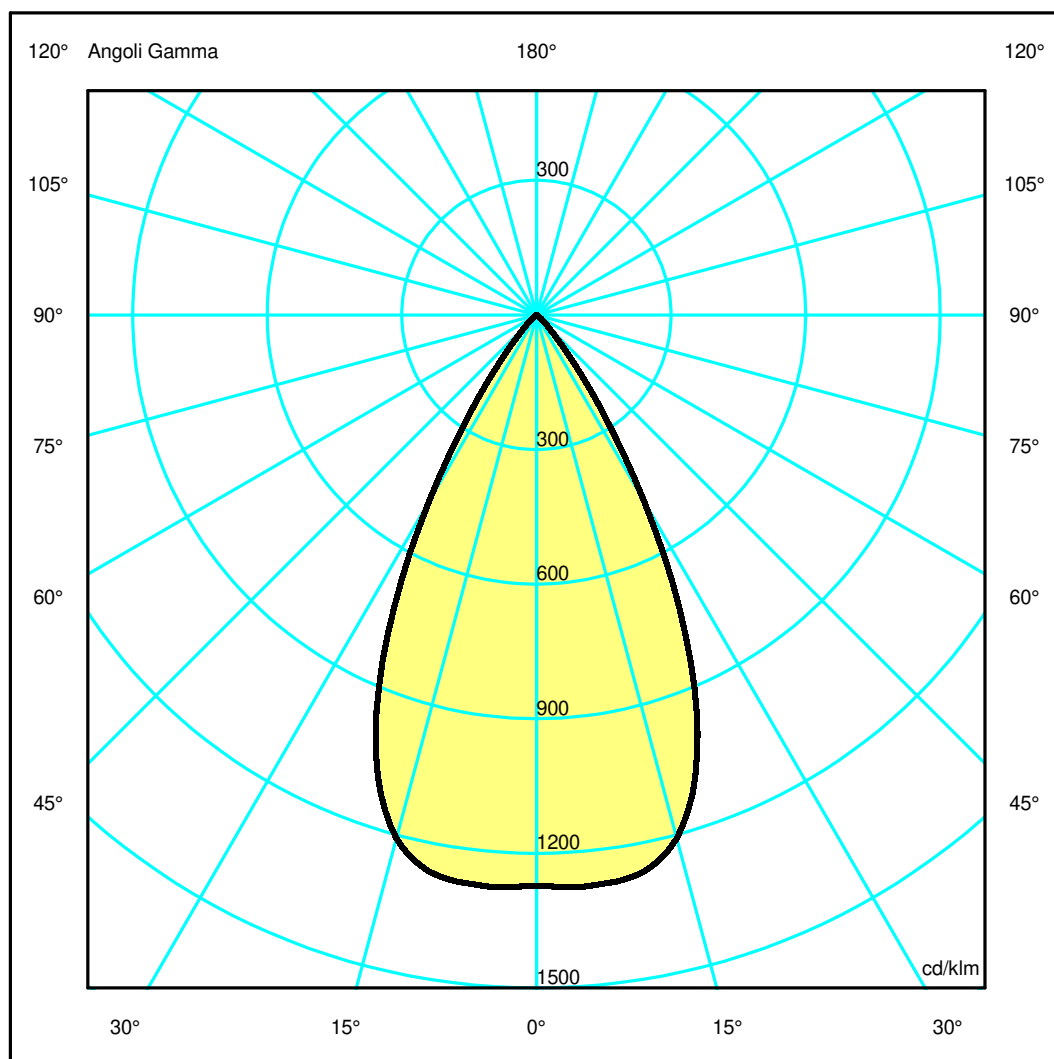

Luminaire

Code CK03904
Name HOY SPOT LENS 65 SEMI RCS 2700K XF NRO

Measurem.


Code FTS2600126
Name HOY SPOT LENS 65 SEMI RCS 2700K XF NRO

| | | | | | | | |
|---|---------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1483 lm | Luminaire Power | 15.5 W | Efficacy | 95.677 lm/W | Efficiency | 100.00% |
| Source Flux | 1483 lm | Maximum value | 1278.16 cd/klm | Position | C=0.00 G=5.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 65 mm | Height | 85 mm | | |
| Round Luminous Area | | Diam. | 45 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.001590 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000385 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 30-03-2026 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1483 lm | |
| LED Flux=1944lm LED Power=14W Eff=76% EfcLed=142lm/W EfcLum=96lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(17k)=50000h | | | | | | | |
| C.I.E. | 97 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.52 | 1.04 | 1.55 | 2.07 | 2.59 | OC | 0.52 | 1.04 | 1.55 | 2.07 | 2.59 |
| OB | 0.52 | 1.04 | 1.55 | 2.07 | 2.59 | OD | 0.52 | 1.04 | 1.55 | 2.07 | 2.59 |

| | | | | | | | | | | |
|----|--------------------------------|---------|---------|---------|--------|-------|-------|------|------|------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 1886.46 | 1895.51 | 1790.44 | 1164.45 | 342.48 | 50.44 | 10.32 | 3.77 | 1.14 | 0.34 |
| OB | 1886.46 | 1895.51 | 1790.44 | 1164.45 | 342.48 | 50.44 | 10.32 | 3.77 | 1.14 | 0.34 |
| OC | 1886.46 | 1895.51 | 1790.44 | 1164.45 | 342.48 | 50.44 | 10.32 | 3.77 | 1.14 | 0.34 |
| OD | 1886.46 | 1895.51 | 1790.44 | 1164.45 | 342.48 | 50.44 | 10.32 | 3.77 | 1.14 | 0.34 |

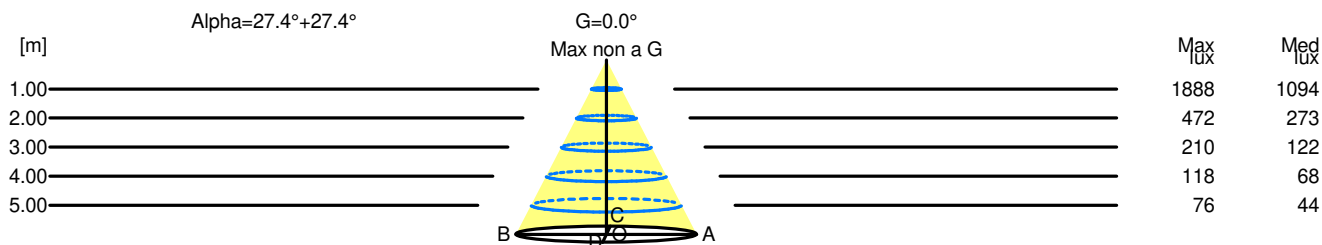

| H[m] | D[m] | Max lux | Med lux | Alpha=27.4°+27.4° | G=0.0 Max non a G |
|------|------|---------|---------|-------------------|----------------------|
| 1.00 | 1.04 | 1888 | 1094 | | |
| 2.00 | 2.07 | 472 | 273 | | |
| 3.00 | 3.11 | 210 | 122 | | |
| 4.00 | 4.15 | 118 | 68 | | |
| 5.00 | 5.18 | 76 | 44 | | |