

Luminaire


Code AX16004
Name HELGOLAND 160 FIX 2700K SP NRO

Measurement

Code FTS2500115
Name HELGOLAND 160 FIX 2700K SP NRO

Luminaire Flux	2018 lm	Luminaire Power	17.0 W	Efficacy	118.706 lm/W	Efficiency	100.00%
Source Flux	2018 lm	Maximum value	3521.74 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	160 mm	Height	12 mm		
Round Luminous Area		Diam.	127 mm	Height	0 mm		
Horizontal Luminous Area		0.012668 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003065 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2018 lm	
LED Flux=2888lm LED Power=17W Eff=70% EfcLed=170lm/W EfcLum=119lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=160mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

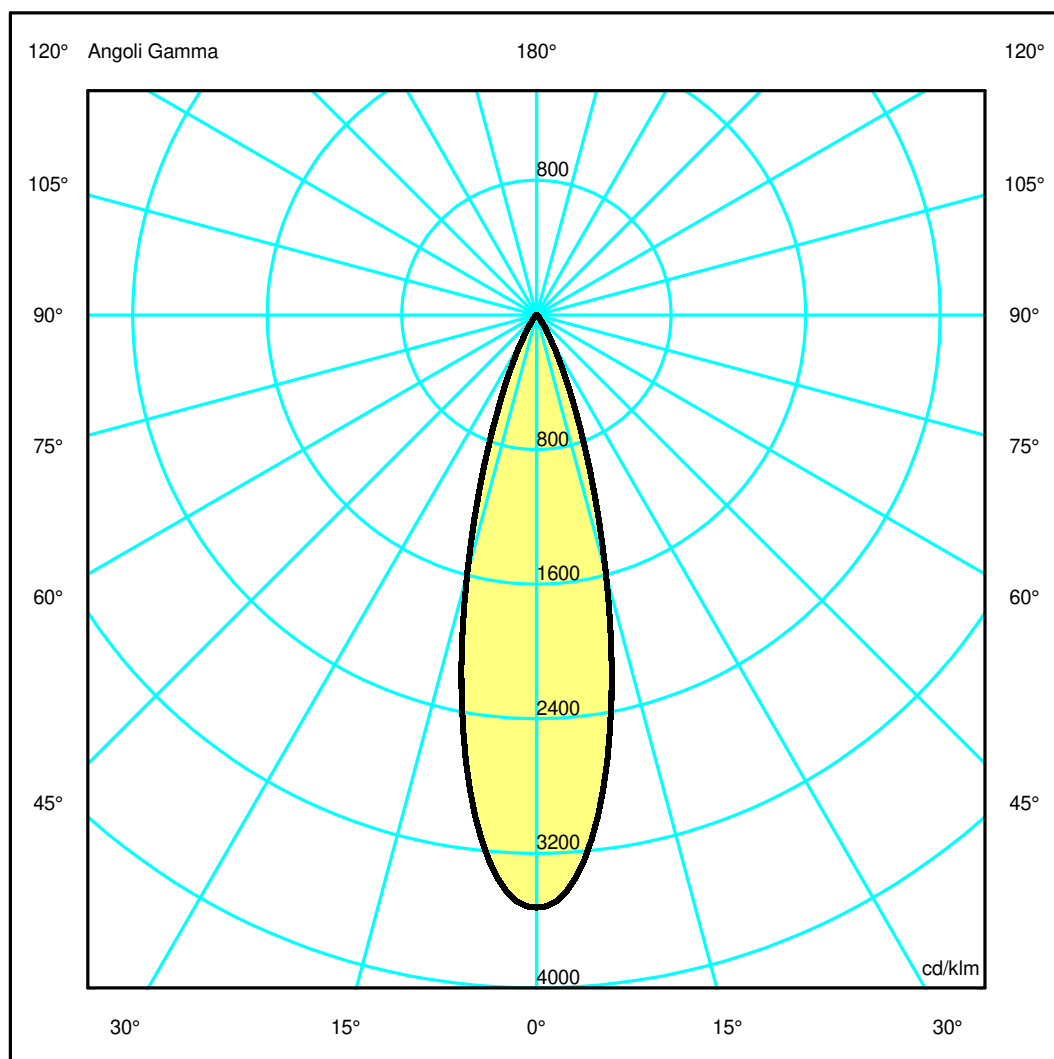

Luminaire

Code AX16004
Name HELGOLAND 160 FIX 2700K SP NRO

Measurem.


Code FTS2500115
Name HELGOLAND 160 FIX 2700K SP NRO

Luminaire Flux	2018 lm	Luminaire Power	17.0 W	Efficacy	118.706 lm/W	Efficiency	100.00%
Source Flux	2018 lm	Maximum value	3521.74 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	160 mm	Height	12 mm		
Round Luminous Area		Diam.	127 mm	Height	0 mm		
Horizontal Luminous Area		0.012668 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003065 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2018 lm	
LED Flux=2888lm LED Power=17W Eff=70% EfcLed=170lm/W EfcLum=119lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	1.00	1.26	OC	0.25	0.50	0.75	1.00	1.26
OB	0.25	0.50	0.75	1.00	1.26	OD	0.25	0.50	0.75	1.00	1.26

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	7106.87	6562.31	3221.03	801.21	148.40	40.89	25.04	14.19	4.10	0.46
OB	7106.87	6562.31	3221.03	801.21	148.40	40.89	25.04	14.19	4.10	0.46
OC	7106.87	6562.31	3221.03	801.21	148.40	40.89	25.04	14.19	4.10	0.46
OD	7106.87	6562.31	3221.03	801.21	148.40	40.89	25.04	14.19	4.10	0.46

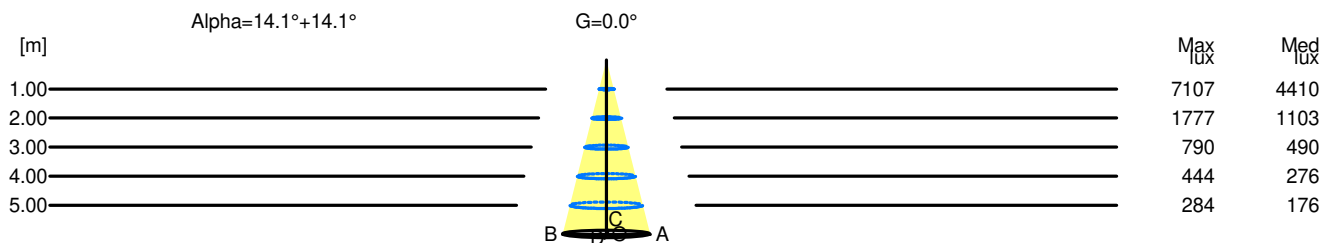

H[m]	D[m]	Max lux	Med lux	Alpha=14.1°+14.1°	G=0.0
1.00	0.50	7107	4410		
2.00	1.00	1777	1103		
3.00	1.51	790	490		
4.00	2.01	444	276		
5.00	2.51	284	176		