

Luminaire

Code AX00301
Name HELGOLAND 60 FIX 4000K XF BCO

Measurement

Code FTS2600018
Name HELGOLAND 60 FIX 4000K XF BCO

Luminaire Flux	400 lm	Luminaire Power	2.6 W	Efficacy	153.846 lm/W	Efficiency	100.00%
Source Flux	400 lm	Maximum value	1138.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	60 mm	Height	12 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area		0.001075 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000260 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		400 lm	
LED Flux=456lm LED Power=2.6W Eff=88% EfcLed=175lm/W EfcLum=154lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	91 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=60mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

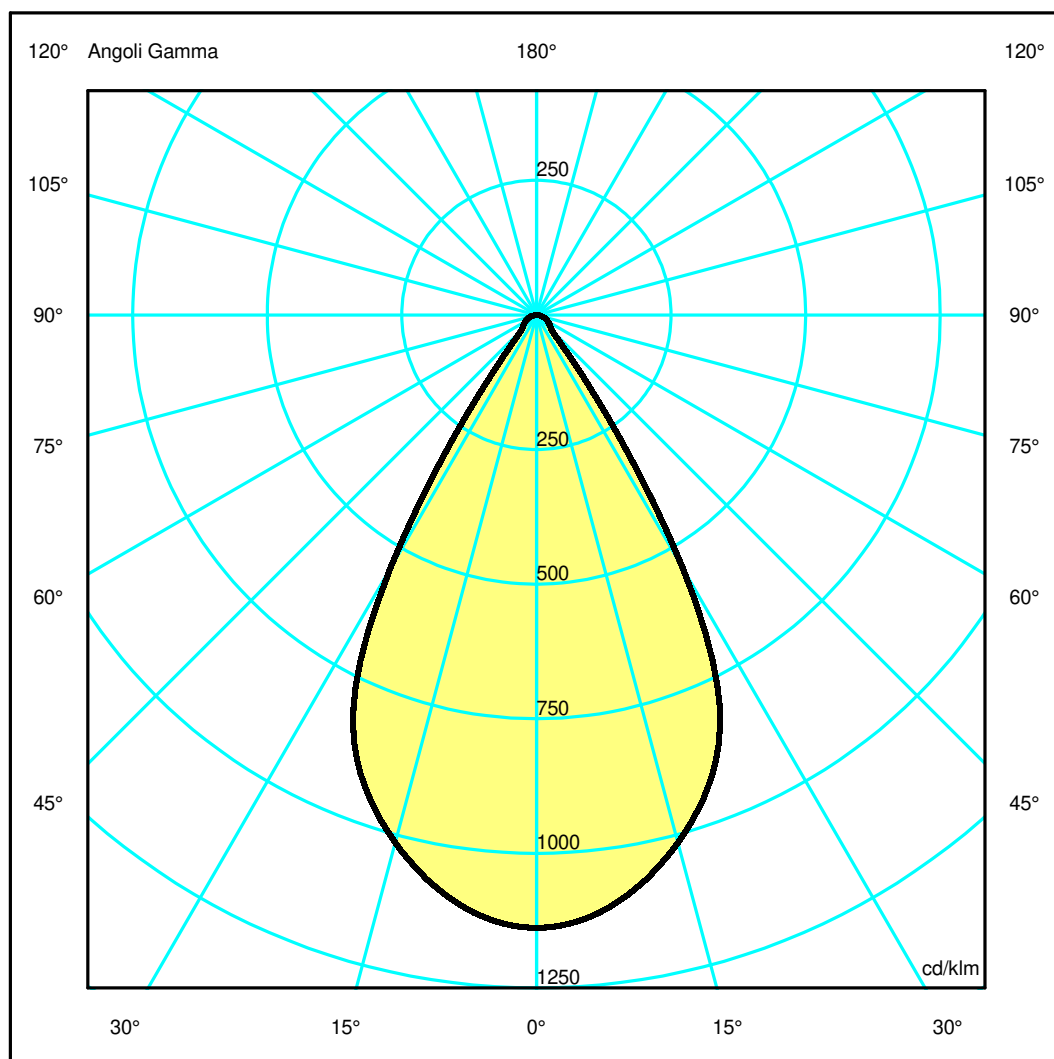

Luminaire

Code AX00301
Name HELGOLAND 60 FIX 4000K XF BCO

Measurem.


Code FTS2600018
Name HELGOLAND 60 FIX 4000K XF BCO

Luminaire Flux	400 lm	Luminaire Power	2.6 W	Efficacy	153.846 lm/W	Efficiency	100.00%
Source Flux	400 lm	Maximum value	1138.26 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Round Luminaire		Diam.	60 mm	Height	12 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area		0.001075 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000260 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		400 lm	
LED Flux=456lm LED Power=2.6W Eff=88% EfcLed=175lm/W EfcLum=154lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	91 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.57	1.14	1.70	2.27	2.84	OC	0.57	1.14	1.70	2.27	2.84
OB	0.57	1.14	1.70	2.27	2.84	OD	0.57	1.14	1.70	2.27	2.84

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	455.30	449.00	405.85	322.14	91.18	16.05	11.60	8.26	4.90	1.40
OB	455.30	449.00	405.85	322.14	91.18	16.05	11.60	8.26	4.90	1.40
OC	455.30	449.00	405.85	322.14	91.18	16.05	11.60	8.26	4.90	1.40
OD	455.30	449.00	405.85	322.14	91.18	16.05	11.60	8.26	4.90	1.40

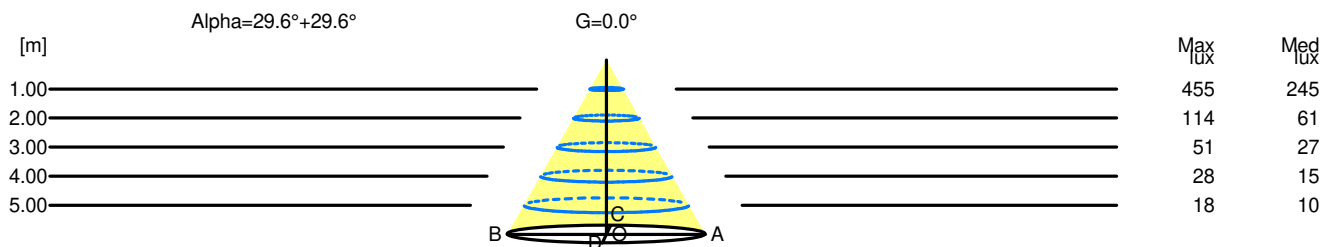

H[m]	D[m]	Max lux	Med lux	Alpha=29.6°+29.6°	G=0.0
1.00	1.14	455	245		
2.00	2.27	114	61		
3.00	3.41	51	27		
4.00	4.54	28	15		
5.00	5.68	18	10		