

## Luminaire


Code AX15101  
Name HELGOLAND 160 FIX 4000K WF BCO

## Measurement

Code FTS2600026.  
Name HELGOLAND 160 FIX 4000K WF BCO

Luminaire Flux	2720 lm	Luminaire Power	17.0 W	Efficacy	160.000 lm/W	Efficiency	100.00%
Source Flux	2720 lm	Maximum value	2335.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	160 mm	Height	12 mm		
Round Luminous Area		Diam.	143 mm	Height	0 mm		
Horizontal Luminous Area		0.016061 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003885 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2720 lm	
LED Flux=3064lm LED Power=17W Eff=89% EfcLed=180lm/W EfcLum=160lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Diam=160mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %



## Luminaire

Code AX15101  
Name HELGOLAND 160 FIX 4000K WF BCO

## Measurem.


Code FTS2600026.  
Name HELGOLAND 160 FIX 4000K WF BCO

Luminaire Flux	2720 lm	Luminaire Power	17.0 W	Efficacy	160.000 lm/W	Efficiency	100.00%
Source Flux	2720 lm	Maximum value	2335.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	160 mm	Height	12 mm		
Round Luminous Area		Diam.	143 mm	Height	0 mm		
Horizontal Luminous Area		0.016061 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003885 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2720 lm	
LED Flux=3064lm LED Power=17W Eff=89% EfcLed=180lm/W EfcLum=160lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.66	0.99	1.32	1.65	OC	0.33	0.66	0.99	1.32	1.65
OB	0.33	0.66	0.99	1.32	1.65	OD	0.33	0.66	0.99	1.32	1.65

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6352.42	6025.35	3951.06	1591.48	220.48	87.81	65.51	45.07	23.93	6.55
OB	6352.42	6025.35	3951.06	1591.48	220.48	87.81	65.51	45.07	23.93	6.55
OC	6352.42	6025.35	3951.06	1591.48	220.48	87.81	65.51	45.07	23.93	6.55
OD	6352.42	6025.35	3951.06	1591.48	220.48	87.81	65.51	45.07	23.93	6.55

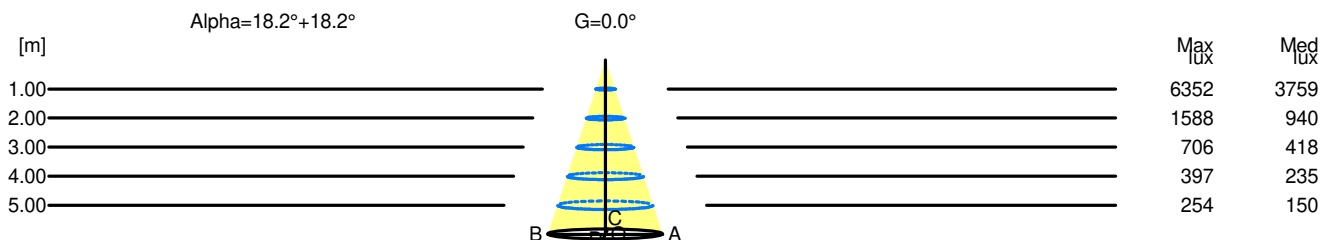

H[m]	D[m]	Max lux	Med lux	Alpha=18.2°+18.2°	G=0.0
1.00	0.66	6352	3759		
2.00	1.32	1588	940		
3.00	1.98	706	418		
4.00	2.64	397	235		
5.00	3.30	254	150		