

## Luminaire

Code FU71004APP  
Name SHARPING 12 FUNIVIA 930 FL NRO

## Measurem.

Code FTS2200031  
Name SHARPING 12 FUNIVIA 930 FL NRO

Luminaire Flux	2100 lm	Luminaire Power	25.0 W	Efficacy	84.000 lm/W	Efficiency	100.00%
Source Flux	2100 lm	Maximum value	2814.46 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	465 mm	Width	28 mm	Height	20 mm
Rectangular Luminous Area		Length	240 mm	Width	20 mm	Height	0 mm
Horizontal Luminous Area		0.004800 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001161 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		03-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2100 lm	
LED Flux=2580lm LED Power=24W Eff=81% EfcLed=109lm/W EfcLum=84lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(18k)=109000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

465mm x 28mm



Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %



## Luminaire

Code FU71004APP  
Name SHARPING 12 FUNIVIA 930 FL NRO

## Measur.


Code FTS2200031  
Name SHARPING 12 FUNIVIA 930 FL NRO

Luminaire Flux	2100 lm	Luminaire Power	25.0 W	Efficacy	84.000 lm/W	Efficiency	100.00%
Source Flux	2100 lm	Maximum value	2814.46 cd/klm	Position	C=20.00 G=1.00	CG Double Symmetrical	
Rectangular Luminaire		Length	465 mm	Width	28 mm	Height	20 mm
Rectangular Luminous Area		Length	240 mm	Width	20 mm	Height	0 mm
Horizontal Luminous Area		0.004800 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001161 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		03-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2100 lm	
LED Flux=2580lm LED Power=24W Eff=81% EfcLed=109lm/W EfcLum=84lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(18k)=109000h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.24	0.47	0.71	0.95	1.18	OC	0.25	0.50	0.75	1.00	1.25
OB	0.24	0.47	0.71	0.95	1.18	OD	0.25	0.50	0.75	1.00	1.25

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5846.70	5307.39	2458.75	984.06	558.10	13.99	4.85	1.39	0.00	0.00
OB	5846.70	5307.39	2458.75	984.06	558.10	13.99	4.85	1.39	0.00	0.00
OC	5846.70	5524.80	2681.57	1063.90	551.31	20.40	5.61	1.33	0.00	0.00
OD	5846.70	5524.80	2681.57	1063.90	551.31	20.40	5.61	1.33	0.00	0.00

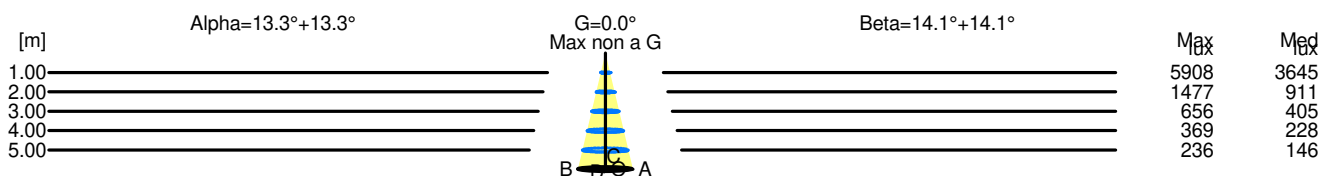

H[m]	D[m]	Max lux	Med lux	Alpha=13.3°+13.3°	G=0.0 Max non a G
1.00	0.47	5908	3645		
2.00	0.95	1477	911		
3.00	1.42	656	405		
4.00	1.89	369	228		
5.00	2.37	236	146		

H[m]	D[m]	Max lux	Med lux	Beta=14.1°+14.1°	G=0.0 Max non a G
1.00	0.50	5908	3645		
2.00	1.00	1477	911		
3.00	1.50	656	405		
4.00	2.01	369	228		
5.00	2.51	236	146		