

Luminaire

Code M2885W01+M217400

Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K DIMMERABILE 2368MM + INDIRETTA LED + OTTICA WALL WASHER PER LED


Measurement

Code FTS1601567

Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K DIMMERABILE 2368MM + INDIRETTA LED + OTTICA WALL WASHER PER LED

Luminaire Flux	9308 lm	Luminaire Power	122.0 W	Efficacy	76.295 lm/W	Efficiency	100.00%
Source Flux	9308 lm	Maximum value	279.12 cd/klm	Position	C=180.00 G=7.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	110 mm
Rectangular Luminous Area		Length	2368 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.075776 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.018332 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		13-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		9308 lm	
LED Flux=15143,88lm LED Power=96W Eff=61% EfcLed=158lm/W EfcLum=76lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	62 89 98 47 100			D DIN 5040		C52	
F UTE	0.47 C + 0.53 T			B NBN		BZ 3	

2368mm x 45mm




Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 53.15 %

DLOR 46.85 %

RN 53.15 %

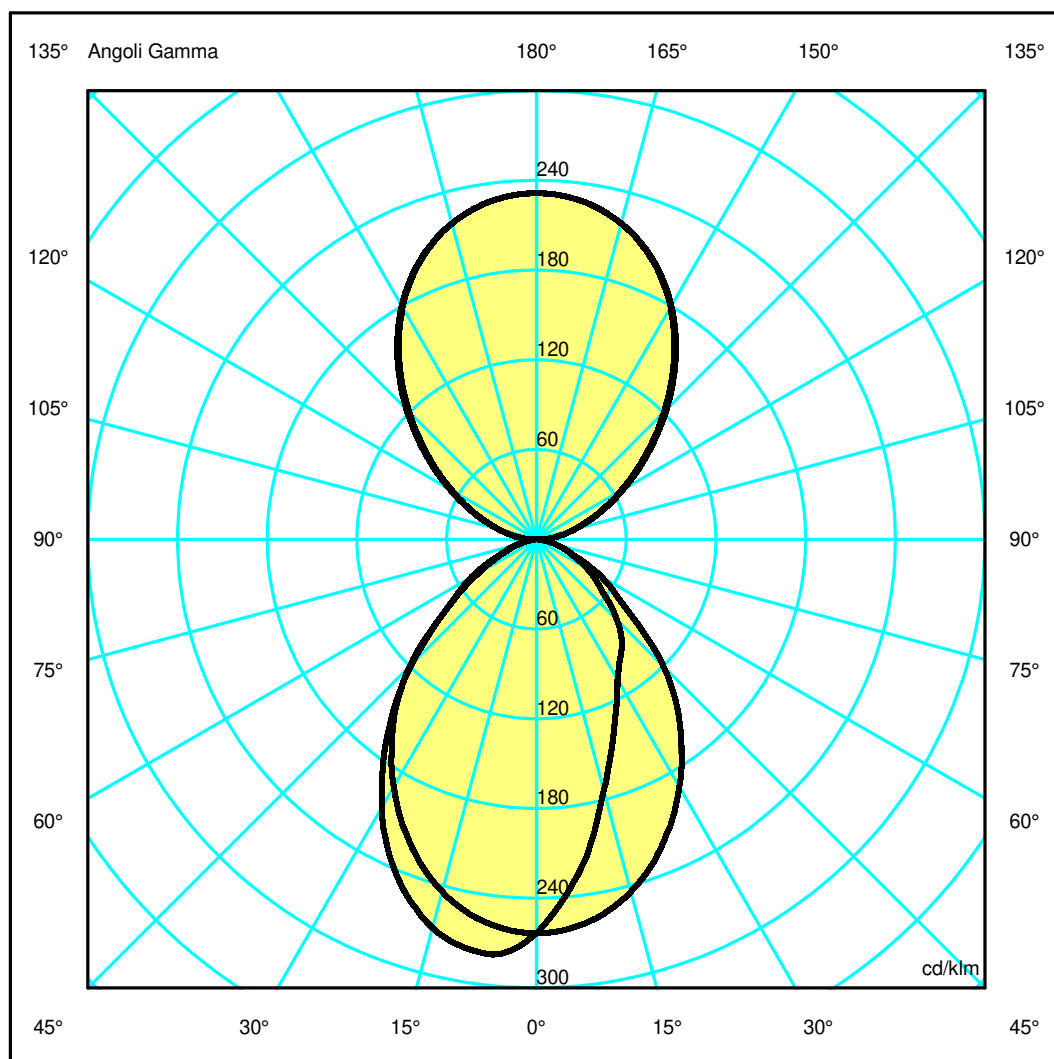

Luminaire

Code M2885W01+M217400

Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K DIMMERABILE 2368MM + INDIRETTA LED + OTTICA WALL WASHER PER LED

Measurem.

Code FTS1601567


Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K DIMMERABILE 2368MM + INDIRETTA LED + OTTICA WALL WASHER PER LED

Luminaire Flux	9308 lm	Luminaire Power	122.0 W	Efficacy	76.295 lm/W	Efficiency	100.00%
Source Flux	9308 lm	Maximum value	279.12 cd/klm	Position	C=180.00 G=7.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	110 mm
Rectangular Luminous Area		Length	2368 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.075776 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.018332 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		13-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		9308 lm	
LED Flux=15143,88lm LED Power=96W Eff=61% EfcLed=158lm/W EfcLum=76lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	62 89 98 47 100			D DIN 5040	C52		
F UTE	0.47 C + 0.53 T			B NBN	BZ 3		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.52	1.04	1.56	2.08	2.60	OC	0.93	1.87	2.80	3.74	4.67
OB	0.76	1.53	2.29	3.05	3.81	OD	0.93	1.87	2.80	3.74	4.67

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2450.31	2207.38	1616.33	1172.08	907.56	707.57	457.61	265.04	128.31	22.83
OB	2450.31	2590.18	2503.17	2167.53	1659.09	1098.04	595.41	281.40	108.97	18.37
OC	2450.31	2430.46	2269.35	1968.58	1573.90	1116.61	608.34	306.60	131.72	26.25
OD	2450.31	2430.46	2269.35	1968.58	1573.90	1116.61	608.34	306.60	131.72	26.25

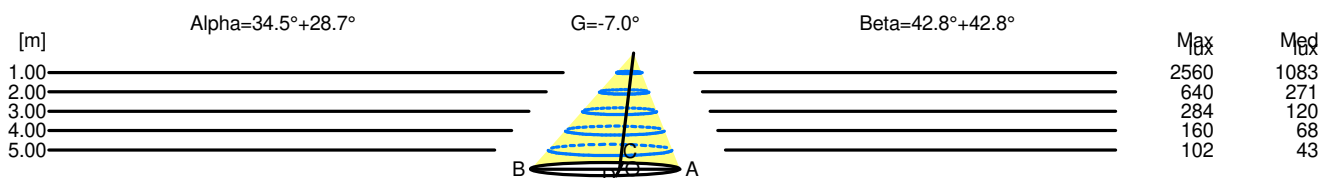

H[m]	D[m]	Max lux	Med lux	Alpha=34.5°+28.7°	G=-7.0
1.00	1.28	2560	1083		
2.00	2.57	640	271		
3.00	3.85	284	120		
4.00	5.13	160	68		
5.00	6.42	102	43		

H[m]	D[m]	Max lux	Med lux	Beta=42.8°+42.8°	G=0.0
1.00	1.87	2560	1083		
2.00	3.74	640	271		
3.00	5.60	284	120		
4.00	7.47	160	68		
5.00	9.34	102	43		