

Luminaire


Code WW11120
Name WALL WASHER A.24 600 3000K BBZ

Measurerm.

Code FTS2600114
Name WALL WASHER A.24 600 3000K BBZ

Luminaire Flux	888 lm	Luminaire Power	11.0 W	Efficacy	80.727 lm/W	Efficiency	100.00%
Source Flux	888 lm	Maximum value	824.66 cd/klm	Position	C=180.00 G=14.00	CG Asymmetrical	
Rectangular Luminaire		Length	615 mm	Width	40 mm	Height	78 mm
Rectangular Luminous Area		Length	615 mm	Width	30 mm	Height	0 mm
Horizontal Luminous Area		0.018450 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004463 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-03-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		888 lm	
LED Flux=1475lm LED Power=10W Eff=60% EfcLed=148lm/W EfcLum=85lm/W CCT=3000K Ra=90 SDCM=3 L70(6k)=50000h							
C.I.E.	58 82 93 93 100			D DIN 5040	A41		
F UTE	0.93 D + 0.07 T			B NBN	BZ 3 / 1.25 / BZ 4		


615mm x 40mm



Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 7.02 %
DLOR 92.98 %
RN 7.02 %

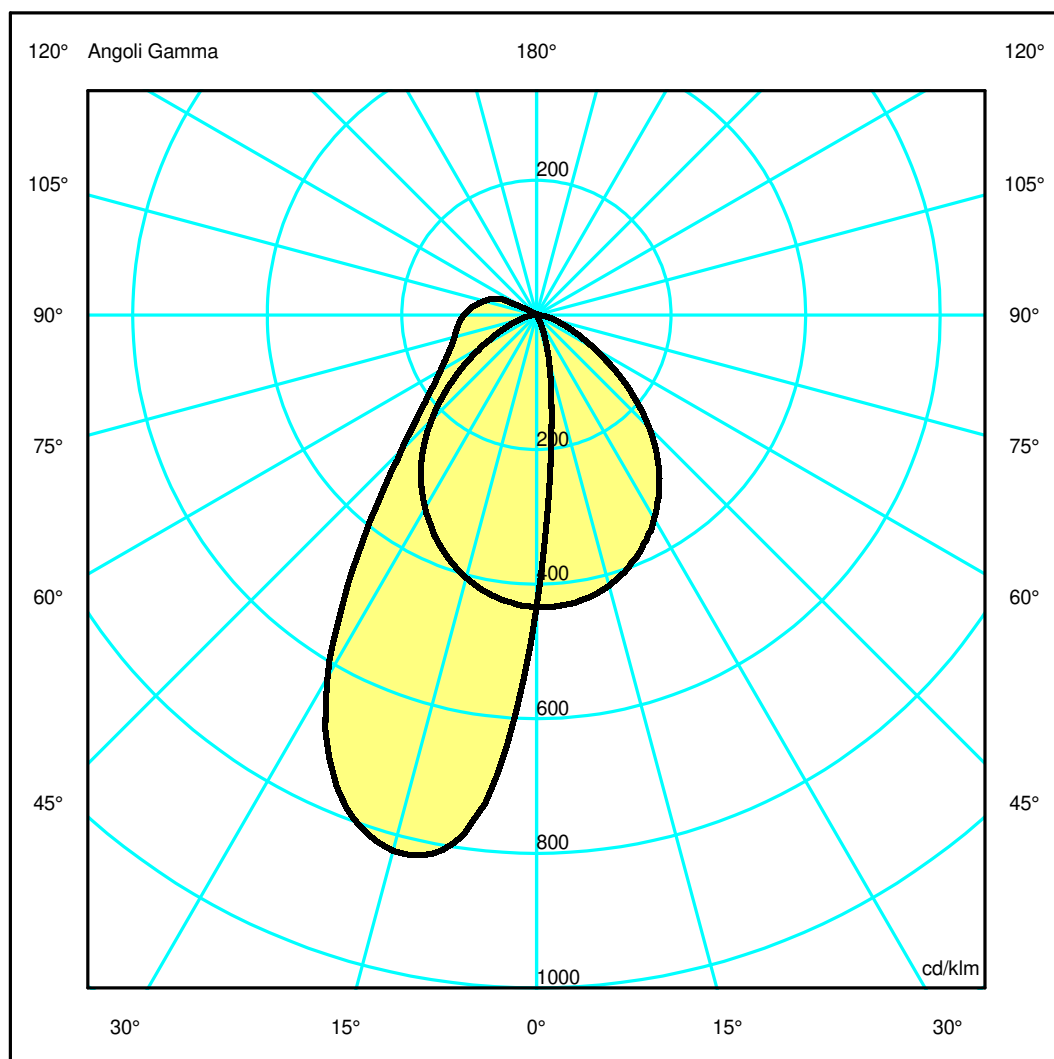

Luminaire

Code WW11120
Name WALL WASHER A.24 600 3000K BBZ

Measur.


Code FTS2600114
Name WALL WASHER A.24 600 3000K BBZ

Luminaire Flux	888 lm	Luminaire Power	11.0 W	Efficacy	80.727 lm/W	Efficiency	100.00%
Source Flux	888 lm	Maximum value	824.66 cd/klm	Position	C=180.00 G=14.00	CG	Asymmetrical
Rectangular Luminaire		Length	615 mm	Width	40 mm	Height	78 mm
Rectangular Luminous Area		Length	615 mm	Width	30 mm	Height	0 mm
Horizontal Luminous Area		0.018450 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004463 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-03-2026		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		888 lm	
LED Flux=1475lm LED Power=10W Eff=60% EfcLed=148lm/W EfcLum=85lm/W CCT=3000K Ra=90 SDCM=3 L70(6k)=50000h							
C.I.E.	58 82 93 93 100			D DIN 5040	A41		
F UTE	0.93 D + 0.07 T			B NBN	BZ 3 / 1.25 / BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.51	0.77	1.03	1.29	OC	1.08	2.17	3.25	4.34	5.42
OB	0.53	1.07	1.60	2.14	2.67	OD	1.08	2.16	3.24	4.32	5.41

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	385.25	205.76	62.78	12.51	0.62	0.50	0.47	0.56	0.64	0.69
OB	385.25	612.38	731.81	646.37	434.76	252.62	168.61	131.14	112.09	101.93
OC	385.25	384.64	369.59	333.84	281.43	210.01	126.32	58.98	25.25	7.01
OD	385.25	380.75	359.15	320.01	265.37	196.78	118.80	56.03	23.96	6.25

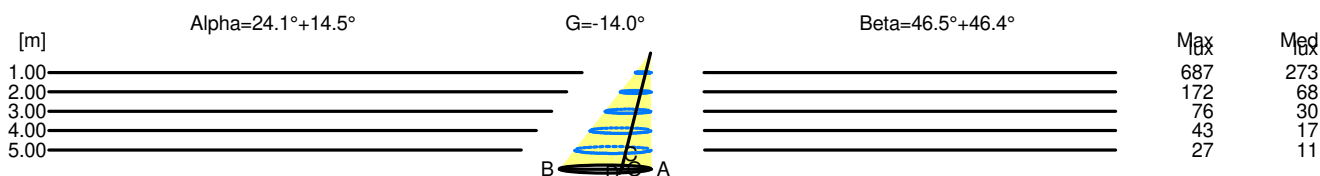

H[m]	D[m]	Max lux	Med lux	Alpha=24.1°+14.5°	G=-14.0	
1.00	0.79	687	273			
2.00	1.58	172	68			
3.00	2.38	76	30			
4.00	3.17	43	17			
5.00	3.96	27	11			

H[m]	D[m]	Max lux	Med lux	Beta=46.4°+46.5°	G=0.0	
1.00	2.17	687	273			
2.00	4.33	172	68			
3.00	6.50	76	30			
4.00	8.66	43	17			
5.00	10.83	27	11			