


Luminaire

Code 1892W10A
Name CRIOSFERA S ORIZZ. DALI/PUSH 2700K

Measurement

Code FTS2600112
Name CRIOSFERA S ORIZZ. DALI/PUSH 2700K

Luminaire Flux	3783 lm	Luminaire Power	29.0 W	Efficacy	130.446 lm/W	Efficiency	100.00%
Source Flux	3783 lm	Maximum value	125.34 cd/klm	Position	C=5.00 G=121.00	CG	Asymmetrical
Round Luminaire		Diam.	100 mm	Height	1050 mm		
Round Luminous Area		Diam.	100 mm	Height	1042 mm		
Horizontal Luminous Area		0.007854 m ²		Emitting area on Plane 180°		0.104200 m ²	
Emitting area on Plane 0°		0.104200 m ²		Emitting area on Plane 270°		0.104200 m ²	
Emitting area on Plane 90°		0.104200 m ²		Glare area at 76°		0.103005 m ²	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		15-09-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3783 lm	
LED Flux=4178lm LED Power=26W Eff=91% EfcLed=161lm/W EfcLum=130lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	34 59 80 48 100			D DIN 5040		C22	
F UTE	0.48 H + 0.52 T			B NBN		BZ 6 / 3 / BZ 7	

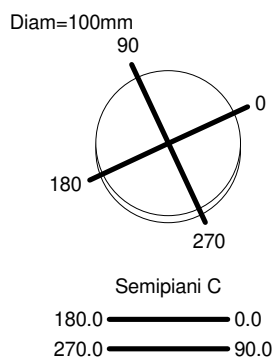

ULOR 52.33 %
DLOR 47.67 %
RN 52.33 %

